

Industrial Plugs and Socket



Page H01
YHT
Industrial Plugs
and Socket



Page H10
YHT
Mounted Plugs
and Socket

YHT Series

Plugs and Socket



Electrical Accessories

Connecting Terminals



Page H17
DTL-2
Connecting Terminals



Page H17
DT
Connecting Terminals



Page H18
SC(JGK)
Connecting Terminals



Page H18
GTL
Connecting Terminals



Page H19
GT
Connecting Terminals



Page H19
GTY
Connecting Terminals

Insulated Ring Terminals



Page H20
RV,RVS,RVM,RVL
Insulated Ring Terminals

Non-Insulated Ring Terminals



Page H21
RNB,RNBS,RNBM,RNBL
Non-Insulated Ring Terminals

Insulated Spade Terminals



Page H23
SV,SVL,SVS,SVM
Insulated Spade Terminals

Non-Insulated Spade Terminals



Page H24
SNB,SNBS,SNBL,SNBM
Non-Insulated Spade Terminals

Insulated Female/Male Connectors



Page H25
FDD,MDD
Insulated Female/Male Connectors

Insulated Receptacle/Buttlet Disconnects



Page H26
FRD,MPD
Insulated Receptacle/Buttlet Disconnects

Insulated Butt Connectors & Insulated Buttlet Disconnects



Page H27
BV,PVT,BNYF
Insulated Butt Connectors & Insulated Buttlet Disconnects

Fully Vinyl Insulated Disconnects & Insulated Piggy Back Disconnects



Page H28
FDFD,FBDD
Fully Vinyl Insulated Disconnects & Insulated Piggy Back Disconnects

Electrical Accessories

Insulated Blade Terminals & Insulated Lipped

Insulated/Non-insulated Pin Terminals



Page H29
PTV,PTN
Insulated/Non-insulated Pin Terminals

Insulated Blade Terminals & Insulated Lipped Blade Terminals



Page H30
DBV
Insulated Blade Terminals & Insulated Lipped Blade Terminals

Insulated Cord End Terminals



Page H31
E0506~E50-25
Insulated Cord End Terminals

Non-Insulated Cord End Terminals & Non-Insulated Cord End Twin Terminals




Page H32
EN0506~EN50-20,TE0508~TE16-14
Low Voltage Fuse

Terminal Connector



Page H33
JXB,EK,UK,USLKG
Terminal Connector

Terminal Connector

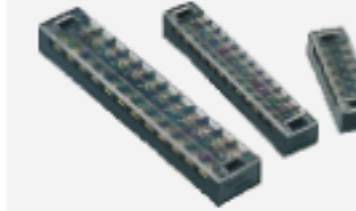

Page H34
TB,TC
Terminal Connector

Cooling Fan




Page H35
YC
Cooling Fan

PG Nylon Cable Gland




Page H41
PG
Nylon Cable Gland

Tie Series




Page H42
Self-locking Nylon Cable Ties




Page H43
Terminal Blocks




Page H44
Insulating Distributing Slot




Page H45
Characteristics




Page H46
Features and Application



Page H47
Yellow & Green Thermal Shrinkable Bushing



Page H48
Spiral Wrapping Band




Page H48
Cable Marker



Page H49
Tie Mounts

Electrical Accessories


Terminal Block Series




Page H50
HC-001
terminal block



Page H50
HC-002
terminal block




Page H51
HC-003
terminal block



Page H51
HC-004
terminal block




Page H52
HC-005
terminal block



Page H52
HC-006
terminal block




Page H53
HC-007
terminal block



Page H53
HC-008
terminal block



Page H54
HC-009
terminal block



Page H54
HL-010
terminal block



Page H55
HC-012
terminal block



Page H55
HC-013
terminal block




Page H56
HC-014
terminal block

HC-016

Page H56
HC-016
terminal block



207




211



407




415

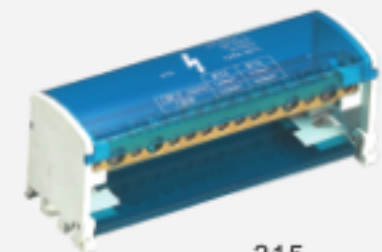

215



411

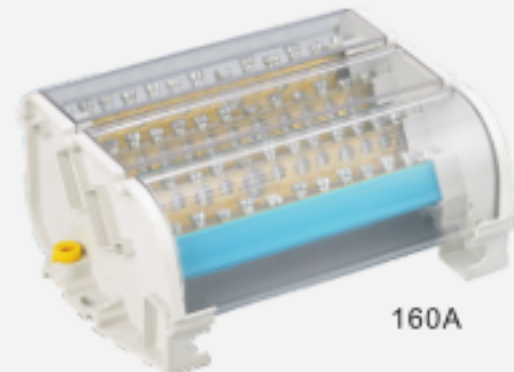

160A

Electrical Accessories

Terminal Block Series



Page H57
HC-017
terminal block



Page H57
HC-018
terminal block



Page H58
HC-022
terminal block




Page H58
HC-023
terminal block



Page H58
HC-026
terminal block



Page H59
HC-025
terminal block



Page H59
HC-024
terminal block

UKK

Page H60
UKK
terminal block



UKK-80



UKK-125



UKK-160



UKK-250


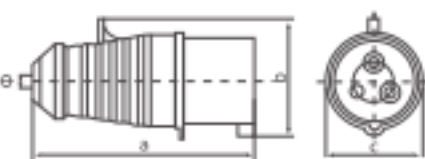

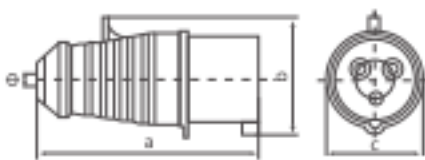



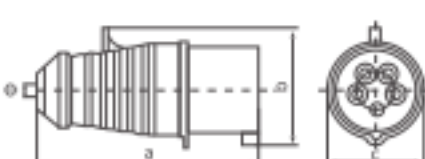






UKK-400


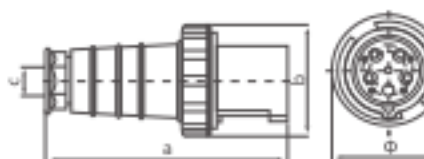

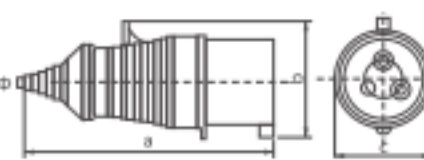

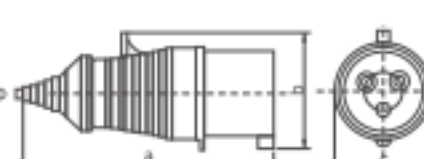








UKK-500

YHT Industrial Plugs and Socket






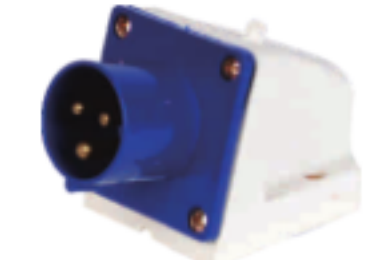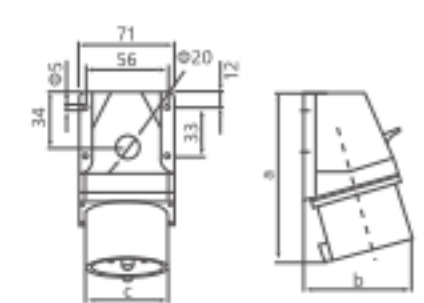








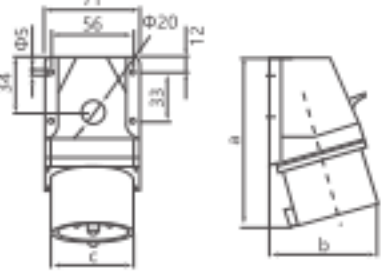



	<p>YHT-013-4 YHT-023-4 Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p>  <p>2P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>122</td><td>141</td></tr> <tr><td></td><td>b</td><td>57</td><td>77</td></tr> <tr><td></td><td>c</td><td>50</td><td>64</td></tr> <tr><td></td><td>Φ</td><td>6</td><td>8</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	122	141		b	57	77		c	50	64		Φ	6	8	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		4h																																
Rated current(A)	16	32																																
Pole	3																																	
Dimension(mm)	a	122	141																															
	b	57	77																															
	c	50	64																															
	Φ	6	8																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-013 YHT-023 Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p>  <p>2P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>122</td><td>141</td></tr> <tr><td></td><td>b</td><td>57</td><td>77</td></tr> <tr><td></td><td>c</td><td>50</td><td>64</td></tr> <tr><td></td><td>Φ</td><td>6</td><td>8</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	122	141		b	57	77		c	50	64		Φ	6	8	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	3																																	
Dimension(mm)	a	122	141																															
	b	57	77																															
	c	50	64																															
	Φ	6	8																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-014 YHT-024 Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p>  <p>3P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>122</td><td>141</td></tr> <tr><td></td><td>b</td><td>57</td><td>77</td></tr> <tr><td></td><td>c</td><td>50</td><td>64</td></tr> <tr><td></td><td>Φ</td><td>6</td><td>8</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	122	141		b	57	77		c	50	64		Φ	6	8	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	4																																	
Dimension(mm)	a	122	141																															
	b	57	77																															
	c	50	64																															
	Φ	6	8																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-015 YHT-025 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p>  <p>3P+N+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>130</td><td>141</td></tr> <tr><td></td><td>b</td><td>75</td><td>87</td></tr> <tr><td></td><td>c</td><td>64</td><td>70</td></tr> <tr><td></td><td>Φ</td><td>8</td><td>8</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a	130	141		b	75	87		c	64	70		Φ	8	8	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	5																																	
Dimension(mm)	a	130	141																															
	b	75	87																															
	c	64	70																															
	Φ	8	8																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-033 YHT-043 Current(A): 63A,125A Voltage(V): 220-240V~ Protection degree: IP67</p>  <p>2P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>231.5</td><td>295</td></tr> <tr><td></td><td>b</td><td>110</td><td>123</td></tr> <tr><td></td><td>c</td><td>16-38</td><td>30-64</td></tr> <tr><td></td><td>Φ</td><td>110</td><td>123</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td colspan="2">16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	3			Dimension(mm)	a	231.5	295		b	110	123		c	16-38	30-64		Φ	110	123	Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																																
Rated current(A)	63	125																																
Pole	3																																	
Dimension(mm)	a	231.5	295																															
	b	110	123																															
	c	16-38	30-64																															
	Φ	110	123																															
Cable nominal cross-section area(mm ²)	6-16	16-50																																
	<p>YHT-034 YHT-044 Current(A): 63A,125A Voltage(V): 380-415V~ Protection degree: IP67</p>  <p>3P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>231.5</td><td>295</td></tr> <tr><td></td><td>b</td><td>110</td><td>123</td></tr> <tr><td></td><td>c</td><td>16-38</td><td>30-64</td></tr> <tr><td></td><td>Φ</td><td>110</td><td>123</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td colspan="2">16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	4			Dimension(mm)	a	231.5	295		b	110	123		c	16-38	30-64		Φ	110	123	Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																																
Rated current(A)	63	125																																
Pole	4																																	
Dimension(mm)	a	231.5	295																															
	b	110	123																															
	c	16-38	30-64																															
	Φ	110	123																															
Cable nominal cross-section area(mm ²)	6-16	16-50																																

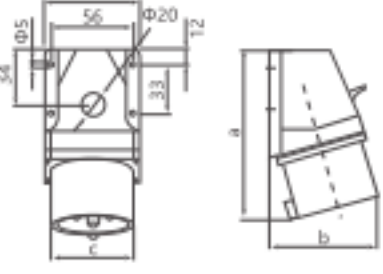YHT Industrial Plugs and Socket

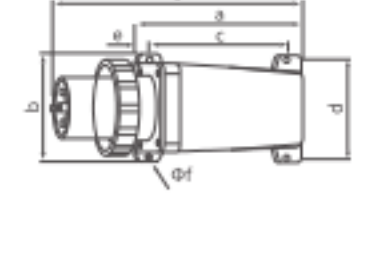	<p>YHT-035 YHT-045 Current(A): 63A,125A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP67</p>  <p>3P+N+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>231.5</td><td>295</td></tr> <tr><td></td><td>b</td><td>110</td><td>123</td></tr> <tr><td></td><td>c</td><td>16-38</td><td>30-64</td></tr> <tr><td></td><td>Φ</td><td>110</td><td>123</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td colspan="2">16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	5			Dimension(mm)	a	231.5	295		b	110	123		c	16-38	30-64		Φ	110	123	Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																																
Rated current(A)	63	125																																
Pole	5																																	
Dimension(mm)	a	231.5	295																															
	b	110	123																															
	c	16-38	30-64																															
	Φ	110	123																															
Cable nominal cross-section area(mm ²)	6-16	16-50																																
	<p>YHT-013L-4 YHT-023L-4 Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p>  <p>2P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>142</td><td>171</td></tr> <tr><td></td><td>b</td><td>57</td><td>77</td></tr> <tr><td></td><td>c</td><td>50</td><td>64</td></tr> <tr><td></td><td>Φ</td><td>7-16</td><td>7-20</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	142	171		b	57	77		c	50	64		Φ	7-16	7-20	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		4h																																
Rated current(A)	16	32																																
Pole	3																																	
Dimension(mm)	a	142	171																															
	b	57	77																															
	c	50	64																															
	Φ	7-16	7-20																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-013L YHT-023L Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p>  <p>2P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>142</td><td>171</td></tr> <tr><td></td><td>b</td><td>57</td><td>77</td></tr> <tr><td></td><td>c</td><td>50</td><td>64</td></tr> <tr><td></td><td>Φ</td><td>7-16</td><td>7-20</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	142	171		b	57	77		c	50	64		Φ	7-16	7-20	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	3																																	
Dimension(mm)	a	142	171																															
	b	57	77																															
	c	50	64																															
	Φ	7-16	7-20																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-014L YHT-024L Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p>  <p>3P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>142</td><td>171</td></tr> <tr><td></td><td>b</td><td>57</td><td>77</td></tr> <tr><td></td><td>c</td><td>50</td><td>64</td></tr> <tr><td></td><td>Φ</td><td>7-16</td><td>7-20</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	142	171		b	57	77		c	50	64		Φ	7-16	7-20	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	4																																	
Dimension(mm)	a	142	171																															
	b	57	77																															
	c	50	64																															
	Φ	7-16	7-20																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-015L YHT-025L Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p>  <p>3P+N+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>161</td><td>174</td></tr> <tr><td></td><td>b</td><td>75</td><td>87</td></tr> <tr><td></td><td>c</td><td>64</td><td>70</td></tr> <tr><td></td><td>Φ</td><td>7-20</td><td>7-20</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a	161	174		b	75	87		c	64	70		Φ	7-20	7-20	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	5																																	
Dimension(mm)	a	161	174																															
	b	75	87																															
	c	64	70																															
	Φ	7-20	7-20																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																
	<p>YHT-513 YHT-523 Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p>  <p>2P+E</p>	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>125</td><td>139</td></tr> <tr><td></td><td>b</td><td>70</td><td>81</td></tr> <tr><td></td><td>c</td><td>43</td><td>58</td></tr> <tr><td></td><td>Φ</td><td>3-18</td><td>3-18</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	125	139		b	70	81		c	43	58		Φ	3-18	3-18	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																
Rated current(A)	16	32																																
Pole	4																																	
Dimension(mm)	a	125	139																															
	b	70	81																															
	c	43	58																															
	Φ	3-18	3-18																															
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																

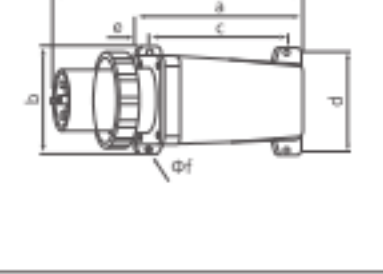

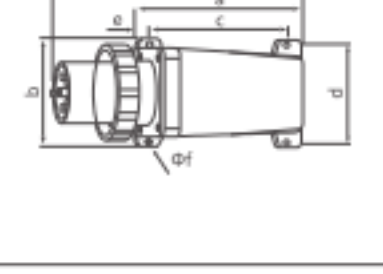


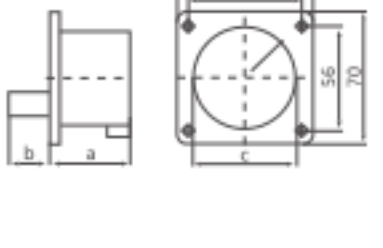








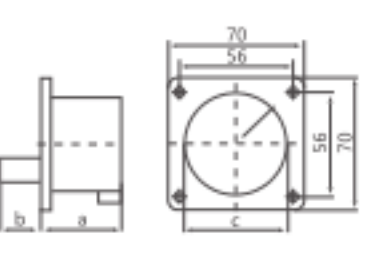



Electrical Accessories

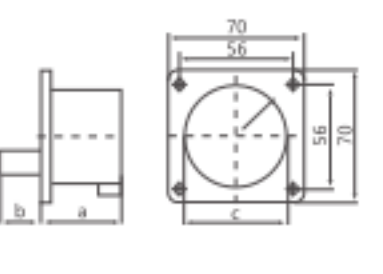YHT Industrial Plugs and Socket

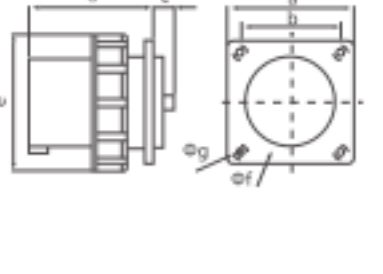	<p>YHT-514 YHT-524</p> <p>Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>16</td><td>32</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>130</td><td>139</td></tr> <tr><td colspan="2"></td><td>72</td><td>81</td></tr> <tr><td colspan="2"></td><td>49.5</td><td>58</td></tr> <tr><td colspan="2"></td><td>3-13</td><td>3-18</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		4		Dimension(mm)		a	b			130	139			72	81			49.5	58			3-13	3-18	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																
Earth contact position		6h																																																				
Rated current(A)		16	32																																																			
Pole		4																																																				
Dimension(mm)		a	b																																																			
		130	139																																																			
		72	81																																																			
		49.5	58																																																			
		3-13	3-18																																																			
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																																			
	<p>YHT-515 YHT-525</p> <p>Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>16</td><td>32</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">5</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>130</td><td>143</td></tr> <tr><td colspan="2"></td><td>77</td><td>83</td></tr> <tr><td colspan="2"></td><td>55.5</td><td>63</td></tr> <tr><td colspan="2"></td><td>3-18</td><td>3-18</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		5		Dimension(mm)		a	b			130	143			77	83			55.5	63			3-18	3-18	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																
Earth contact position		6h																																																				
Rated current(A)		16	32																																																			
Pole		5																																																				
Dimension(mm)		a	b																																																			
		130	143																																																			
		77	83																																																			
		55.5	63																																																			
		3-18	3-18																																																			
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																																			
	<p>YHT-533 YHT-543</p> <p>Current(A): 63A,125A Voltage(V): 220-240V~ Protection degree: IP67</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>63</td><td>125</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>193</td><td>220</td></tr> <tr><td colspan="2"></td><td>122</td><td>140</td></tr> <tr><td colspan="2"></td><td>157</td><td>185</td></tr> <tr><td colspan="2"></td><td>109</td><td>130</td></tr> <tr><td colspan="2"></td><td>19</td><td>17</td></tr> <tr><td colspan="2"></td><td>6</td><td>8</td></tr> <tr><td colspan="2"></td><td>288</td><td>330</td></tr> <tr><td colspan="2"></td><td>127</td><td>140</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		3		Dimension(mm)		a	b			193	220			122	140			157	185			109	130			19	17			6	8			288	330			127	140	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																																				
Rated current(A)		63	125																																																			
Pole		3																																																				
Dimension(mm)		a	b																																																			
		193	220																																																			
		122	140																																																			
		157	185																																																			
		109	130																																																			
		19	17																																																			
		6	8																																																			
		288	330																																																			
		127	140																																																			
Cable nominal cross-section area(mm ²)		6-16	16-50																																																			
	<p>YHT-534 YHT-544</p> <p>Current(A): 63A,125A Voltage(V): 380-415V~ Protection degree: IP67</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>63</td><td>125</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>193</td><td>220</td></tr> <tr><td colspan="2"></td><td>122</td><td>140</td></tr> <tr><td colspan="2"></td><td>157</td><td>185</td></tr> <tr><td colspan="2"></td><td>109</td><td>130</td></tr> <tr><td colspan="2"></td><td>19</td><td>17</td></tr> <tr><td colspan="2"></td><td>6</td><td>8</td></tr> <tr><td colspan="2"></td><td>288</td><td>330</td></tr> <tr><td colspan="2"></td><td>127</td><td>140</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		4		Dimension(mm)		a	b			193	220			122	140			157	185			109	130			19	17			6	8			288	330			127	140	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																																				
Rated current(A)		63	125																																																			
Pole		4																																																				
Dimension(mm)		a	b																																																			
		193	220																																																			
		122	140																																																			
		157	185																																																			
		109	130																																																			
		19	17																																																			
		6	8																																																			
		288	330																																																			
		127	140																																																			
Cable nominal cross-section area(mm ²)		6-16	16-50																																																			
	<p>YHT-535 YHT-545</p> <p>Current(A): 63A,125A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP67</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>63</td><td>125</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">5</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>193</td><td>220</td></tr> <tr><td colspan="2"></td><td>122</td><td>140</td></tr> <tr><td colspan="2"></td><td>157</td><td>185</td></tr> <tr><td colspan="2"></td><td>109</td><td>130</td></tr> <tr><td colspan="2"></td><td>19</td><td>17</td></tr> <tr><td colspan="2"></td><td>6</td><td>8</td></tr> <tr><td colspan="2"></td><td>288</td><td>330</td></tr> <tr><td colspan="2"></td><td>127</td><td>140</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		5		Dimension(mm)		a	b			193	220			122	140			157	185			109	130			19	17			6	8			288	330			127	140	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																																				
Rated current(A)		63	125																																																			
Pole		5																																																				
Dimension(mm)		a	b																																																			
		193	220																																																			
		122	140																																																			
		157	185																																																			
		109	130																																																			
		19	17																																																			
		6	8																																																			
		288	330																																																			
		127	140																																																			
Cable nominal cross-section area(mm ²)		6-16	16-50																																																			
	<p>YHT-613 YHT-623</p> <p>Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>16</td><td>32</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>42</td><td>50</td></tr> <tr><td colspan="2"></td><td>25</td><td>32</td></tr> <tr><td colspan="2"></td><td>45</td><td>50</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		3		Dimension(mm)		a	b			42	50			25	32			45	50	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																				
Earth contact position		6h																																																				
Rated current(A)		16	32																																																			
Pole		3																																																				
Dimension(mm)		a	b																																																			
		42	50																																																			
		25	32																																																			
		45	50																																																			
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																																			

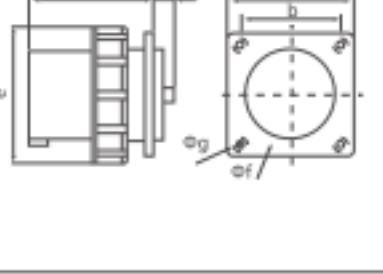

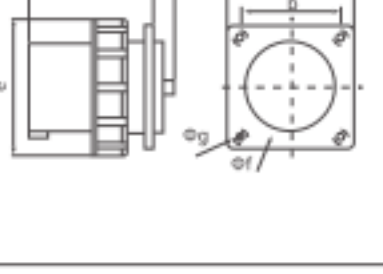











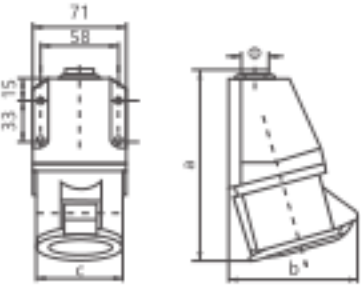



Electrical Accessories

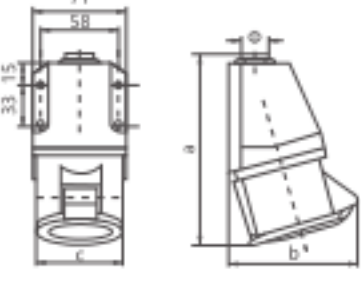YHT Industrial Plugs and Socket

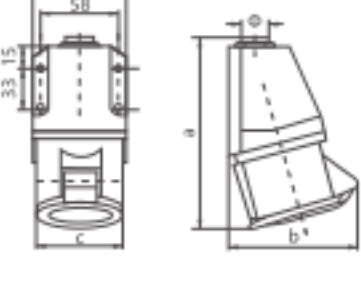	<p>YHT-614 YHT-624</p> <p>Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>16</td><td>32</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>44</td><td>50</td></tr> <tr><td colspan="2"></td><td>23</td><td>32</td></tr> <tr><td colspan="2"></td><td>45</td><td>50</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		4		Dimension(mm)		a	b			44	50			23	32			45	50	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																
Earth contact position		6h																																																
Rated current(A)		16	32																																															
Pole		4																																																
Dimension(mm)		a	b																																															
		44	50																																															
		23	32																																															
		45	50																																															
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																															
	<p>YHT-615 YHT-625</p> <p>Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>16</td><td>32</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">5</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>44</td><td>50</td></tr> <tr><td colspan="2"></td><td>22</td><td>31</td></tr> <tr><td colspan="2"></td><td>55</td><td>61</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		5		Dimension(mm)		a	b			44	50			22	31			55	61	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																
Earth contact position		6h																																																
Rated current(A)		16	32																																															
Pole		5																																																
Dimension(mm)		a	b																																															
		44	50																																															
		22	31																																															
		55	61																																															
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																															
	<p>YHT-633 YHT-643</p> <p>Current(A): 63A,125A Voltage(V): 220-240V~ Protection degree: IP67</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>63</td><td>125</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>100</td><td>120</td></tr> <tr><td colspan="2"></td><td>80</td><td>100</td></tr> <tr><td colspan="2"></td><td>20</td><td>22</td></tr> <tr><td colspan="2"></td><td>108</td><td>102</td></tr> <tr><td colspan="2"></td><td>109</td><td>124</td></tr> <tr><td colspan="2"></td><td>75</td><td>100</td></tr> <tr><td colspan="2"></td><td>6.5</td><td>6.5</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		3		Dimension(mm)		a	b			100	120			80	100			20	22			108	102			109	124			75	100			6.5	6.5	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																																
Rated current(A)		63	125																																															
Pole		3																																																
Dimension(mm)		a	b																																															
		100	120																																															
		80	100																																															
		20	22																																															
		108	102																																															
		109	124																																															
		75	100																																															
		6.5	6.5																																															
Cable nominal cross-section area(mm ²)		6-16	16-50																																															
	<p>YHT-634 YHT-644</p> <p>Current(A): 63A,125A Voltage(V): 380-415V~ Protection degree: IP67</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>63</td><td>125</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>100</td><td>120</td></tr> <tr><td colspan="2"></td><td>80</td><td>100</td></tr> <tr><td colspan="2"></td><td>20</td><td>22</td></tr> <tr><td colspan="2"></td><td>108</td><td>102</td></tr> <tr><td colspan="2"></td><td>109</td><td>124</td></tr> <tr><td colspan="2"></td><td>75</td><td>100</td></tr> <tr><td colspan="2"></td><td>6.5</td><td>6.5</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		4		Dimension(mm)		a	b			100	120			80	100			20	22			108	102			109	124			75	100			6.5	6.5	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																																
Rated current(A)		63	125																																															
Pole		4																																																
Dimension(mm)		a	b																																															
		100	120																																															
		80	100																																															
		20	22																																															
		108	102																																															
		109	124																																															
		75	100																																															
		6.5	6.5																																															
Cable nominal cross-section area(mm ²)		6-16	16-50																																															
	<p>YHT-635 YHT-645</p> <p>Current(A): 63A,125A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP67</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>63</td><td>125</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>100</td><td>120</td></tr> <tr><td colspan="2"></td><td>80</td><td>100</td></tr> <tr><td colspan="2"></td><td>20</td><td>22</td></tr> <tr><td colspan="2"></td><td>108</td><td>102</td></tr> <tr><td colspan="2"></td><td>109</td><td>124</td></tr> <tr><td colspan="2"></td><td>75</td><td>100</td></tr> <tr><td colspan="2"></td><td>6.5</td><td>6.5</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		3		Dimension(mm)		a	b			100	120			80	100			20	22			108	102			109	124			75	100			6.5	6.5	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																																
Rated current(A)		63	125																																															
Pole		3																																																
Dimension(mm)		a	b																																															
		100	120																																															
		80	100																																															
		20	22																																															
		108	102																																															
		109	124																																															
		75	100																																															
		6.5	6.5																																															
Cable nominal cross-section area(mm ²)		6-16	16-50																																															
	<p>YHT-113-4 YHT-123-4</p> <p>Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p> 	 <table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td colspan="2">Rated current(A)</td><td>16</td><td>32</td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td colspan="2">Dimension(mm)</td><td>a</td><td>b</td></tr> <tr><td colspan="2"></td><td>135</td><td>153</td></tr> <tr><td colspan="2"></td><td>92</td><td>102</td></tr> <tr><td colspan="2"></td><td>50</td><td>65</td></tr> <tr><td colspan="2"></td><td>3-18</td><td>3-18</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-1.25</td><td>2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)		16	32	Pole		3		Dimension(mm)		a	b			135	153			92	102			50	65			3-18	3-18	Cable nominal cross-section area(mm ²)		1-1.25	2.5-6												
Earth contact position		4h																																																
Rated current(A)		16	32																																															
Pole		3																																																
Dimension(mm)		a	b																																															
		135	153																																															
		92	102																																															
		50	65																																															
		3-18	3-18																																															
Cable nominal cross-section area(mm ²)		1-1.25	2.5-6																																															

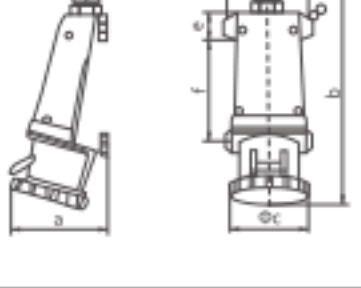

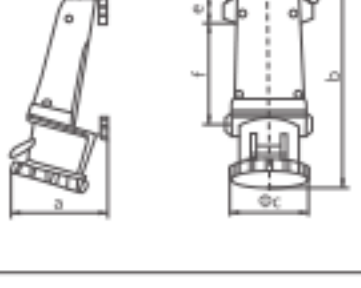


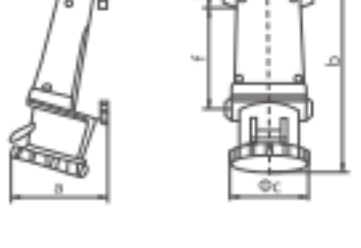








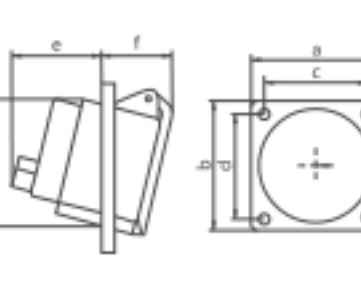



Electrical Accessories

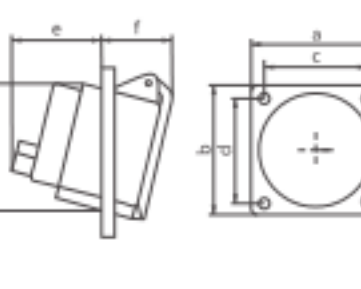YHT Industrial Plugs and Socket

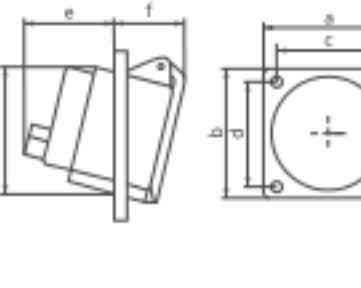

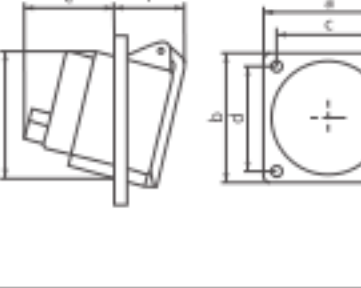


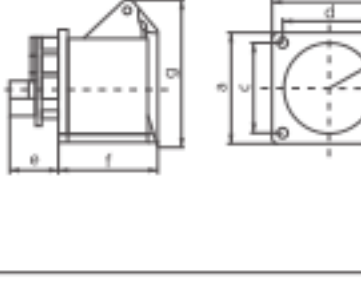


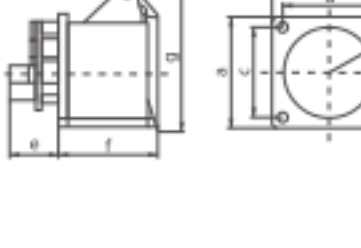





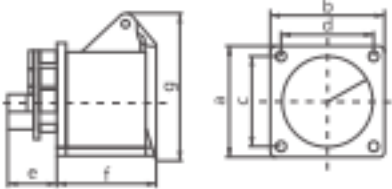



	<p>YHT-113 YHT-123 Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>135</td><td>153</td></tr> <tr><td></td><td>b</td><td>92</td><td>102</td></tr> <tr><td></td><td>c</td><td>50</td><td>65</td></tr> <tr><td></td><td>Φ</td><td>3-18</td><td>3-18</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	135	153		b	92	102		c	50	65		Φ	3-18	3-18	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6													
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole	3																																														
Dimension(mm)	a	135	153																																												
	b	92	102																																												
	c	50	65																																												
	Φ	3-18	3-18																																												
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																													
	<p>YHT-114 YHT-124 Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>140</td><td>152</td></tr> <tr><td></td><td>b</td><td>95</td><td>104</td></tr> <tr><td></td><td>c</td><td>56</td><td>65</td></tr> <tr><td></td><td>Φ</td><td>3-18</td><td>3-18</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	140	152		b	95	104		c	56	65		Φ	3-18	3-18	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6													
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole	4																																														
Dimension(mm)	a	140	152																																												
	b	95	104																																												
	c	56	65																																												
	Φ	3-18	3-18																																												
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																													
	<p>YHT-115 YHT-125 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>139</td><td>153</td></tr> <tr><td></td><td>b</td><td>96</td><td>107</td></tr> <tr><td></td><td>c</td><td>63</td><td>70</td></tr> <tr><td></td><td>Φ</td><td>3-18</td><td>3-18</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a	139	153		b	96	107		c	63	70		Φ	3-18	3-18	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6													
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole	5																																														
Dimension(mm)	a	139	153																																												
	b	96	107																																												
	c	63	70																																												
	Φ	3-18	3-18																																												
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																													
	<p>YHT-133 YHT-143 Current(A): 63A,125A Voltage(V): 220-240V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>134</td><td>154</td></tr> <tr><td></td><td>b</td><td>311</td><td>338</td></tr> <tr><td></td><td>c</td><td>108</td><td>122</td></tr> <tr><td></td><td>d</td><td>111</td><td>130</td></tr> <tr><td></td><td>e</td><td>20</td><td>20</td></tr> <tr><td></td><td>f</td><td>155</td><td>187</td></tr> <tr><td></td><td>g</td><td>6</td><td>6.2</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-25</td><td>25-70</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	3			Dimension(mm)	a	134	154		b	311	338		c	108	122		d	111	130		e	20	20		f	155	187		g	6	6.2	Cable nominal cross-section area(mm ²)	6-25	25-70	
Earth contact position		6h																																													
Rated current(A)	63	125																																													
Pole	3																																														
Dimension(mm)	a	134	154																																												
	b	311	338																																												
	c	108	122																																												
	d	111	130																																												
	e	20	20																																												
	f	155	187																																												
	g	6	6.2																																												
Cable nominal cross-section area(mm ²)	6-25	25-70																																													
	<p>YHT-134 YHT-144 Current(A): 63A,125A Voltage(V): 380-415V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>134</td><td>154</td></tr> <tr><td></td><td>b</td><td>311</td><td>338</td></tr> <tr><td></td><td>c</td><td>108</td><td>122</td></tr> <tr><td></td><td>d</td><td>111</td><td>130</td></tr> <tr><td></td><td>e</td><td>20</td><td>20</td></tr> <tr><td></td><td>f</td><td>155</td><td>187</td></tr> <tr><td></td><td>g</td><td>6</td><td>6.2</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-25</td><td>25-70</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	4			Dimension(mm)	a	134	154		b	311	338		c	108	122		d	111	130		e	20	20		f	155	187		g	6	6.2	Cable nominal cross-section area(mm ²)	6-25	25-70	
Earth contact position		6h																																													
Rated current(A)	63	125																																													
Pole	4																																														
Dimension(mm)	a	134	154																																												
	b	311	338																																												
	c	108	122																																												
	d	111	130																																												
	e	20	20																																												
	f	155	187																																												
	g	6	6.2																																												
Cable nominal cross-section area(mm ²)	6-25	25-70																																													
	<p>YHT-135 YHT-145 Current(A): 63A,125A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>134</td><td>154</td></tr> <tr><td></td><td>b</td><td>311</td><td>338</td></tr> <tr><td></td><td>c</td><td>108</td><td>122</td></tr> <tr><td></td><td>d</td><td>111</td><td>130</td></tr> <tr><td></td><td>e</td><td>20</td><td>20</td></tr> <tr><td></td><td>f</td><td>155</td><td>187</td></tr> <tr><td></td><td>g</td><td>6</td><td>6.2</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-25</td><td>25-70</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	5			Dimension(mm)	a	134	154		b	311	338		c	108	122		d	111	130		e	20	20		f	155	187		g	6	6.2	Cable nominal cross-section area(mm ²)	6-25	25-70	
Earth contact position		6h																																													
Rated current(A)	63	125																																													
Pole	5																																														
Dimension(mm)	a	134	154																																												
	b	311	338																																												
	c	108	122																																												
	d	111	130																																												
	e	20	20																																												
	f	155	187																																												
	g	6	6.2																																												
Cable nominal cross-section area(mm ²)	6-25	25-70																																													

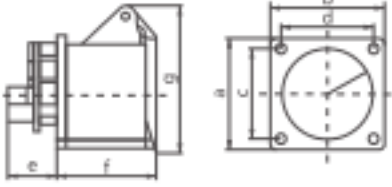Electrical Accessories

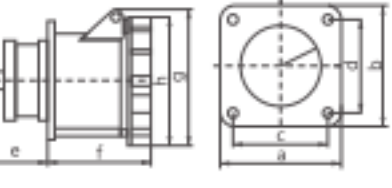

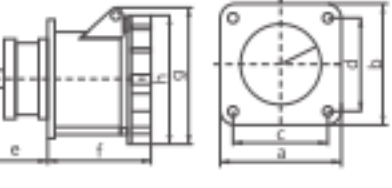


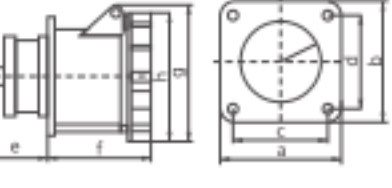


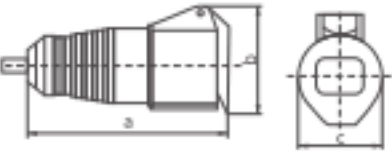





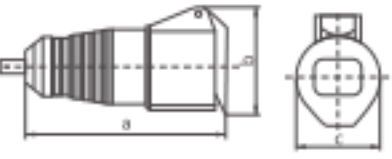



YHT Industrial Plugs and Socket

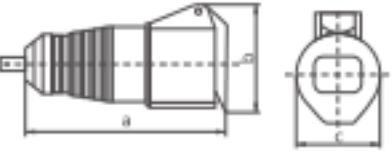	<p>YHT-413-4 YHT-423-4 Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>62</td><td>80</td></tr> <tr><td></td><td>b</td><td>68</td><td>96</td></tr> <tr><td></td><td>c</td><td>47</td><td>60</td></tr> <tr><td></td><td>d</td><td>48</td><td>70</td></tr> <tr><td></td><td>e</td><td>36</td><td>42</td></tr> <tr><td></td><td>f</td><td>37</td><td>43</td></tr> <tr><td></td><td>g</td><td>55</td><td>75</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	62	80		b	68	96		c	47	60		d	48	70		e	36	42		f	37	43		g	55	75	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6					
Earth contact position		4h																																																	
Rated current(A)	16	32																																																	
Pole	3																																																		
Dimension(mm)	a	62	80																																																
	b	68	96																																																
	c	47	60																																																
	d	48	70																																																
	e	36	42																																																
	f	37	43																																																
	g	55	75																																																
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																																	
	<p>YHT-413 YHT-423 Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>62</td><td>80</td></tr> <tr><td></td><td>b</td><td>68</td><td>96</td></tr> <tr><td></td><td>c</td><td>47</td><td>60</td></tr> <tr><td></td><td>d</td><td>48</td><td>70</td></tr> <tr><td></td><td>e</td><td>36</td><td>42</td></tr> <tr><td></td><td>f</td><td>37</td><td>43</td></tr> <tr><td></td><td>g</td><td>55</td><td>75</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	62	80		b	68	96		c	47	60		d	48	70		e	36	42		f	37	43		g	55	75	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6					
Earth contact position		6h																																																	
Rated current(A)	16	32																																																	
Pole	3																																																		
Dimension(mm)	a	62	80																																																
	b	68	96																																																
	c	47	60																																																
	d	48	70																																																
	e	36	42																																																
	f	37	43																																																
	g	55	75																																																
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																																	
	<p>YHT-414 YHT-424 Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>76</td><td>80</td></tr> <tr><td></td><td>b</td><td>86</td><td>96</td></tr> <tr><td></td><td>c</td><td>60</td><td>60</td></tr> <tr><td></td><td>d</td><td>61</td><td>70</td></tr> <tr><td></td><td>e</td><td>47</td><td>42</td></tr> <tr><td></td><td>f</td><td>37</td><td>43</td></tr> <tr><td></td><td>g</td><td>64</td><td>75</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	76	80		b	86	96		c	60	60		d	61	70		e	47	42		f	37	43		g	64	75	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6					
Earth contact position		6h																																																	
Rated current(A)	16	32																																																	
Pole	4																																																		
Dimension(mm)	a	76	80																																																
	b	86	96																																																
	c	60	60																																																
	d	61	70																																																
	e	47	42																																																
	f	37	43																																																
	g	64	75																																																
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																																	
	<p>YHT-415 YHT-425 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>76</td><td>82</td></tr> <tr><td></td><td>b</td><td>86</td><td>97</td></tr> <tr><td></td><td>c</td><td>60</td><td>60</td></tr> <tr><td></td><td>d</td><td>61</td><td>70</td></tr> <tr><td></td><td>e</td><td>47</td><td>42</td></tr> <tr><td></td><td>f</td><td>37</td><td>47</td></tr> <tr><td></td><td>g</td><td>72</td><td>81</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a	76	82		b	86	97		c	60	60		d	61	70		e	47	42		f	37	47		g	72	81	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6					
Earth contact position		6h																																																	
Rated current(A)	16	32																																																	
Pole	5																																																		
Dimension(mm)	a	76	82																																																
	b	86	97																																																
	c	60	60																																																
	d	61	70																																																
	e	47	42																																																
	f	37	47																																																
	g	72	81																																																
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																																	
	<p>YHT-313-4 YHT-323-4 Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>69.5</td><td>71</td></tr> <tr><td></td><td>b</td><td>69.5</td><td>71</td></tr> <tr><td></td><td>c</td><td>56</td><td>56</td></tr> <tr><td></td><td>d</td><td>56</td><td>56</td></tr> <tr><td></td><td>e</td><td>28</td><td>28</td></tr> <tr><td></td><td>f</td><td>48</td><td>63</td></tr> <tr><td></td><td>g</td><td>70</td><td>88</td></tr> <tr><td></td><td>i</td><td>52</td><td>56</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	69.5	71		b	69.5	71		c	56	56		d	56	56		e	28	28		f	48	63		g	70	88		i	52	56	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		4h																																																	
Rated current(A)	16	32																																																	
Pole	3																																																		
Dimension(mm)	a	69.5	71																																																
	b	69.5	71																																																
	c	56	56																																																
	d	56	56																																																
	e	28	28																																																
	f	48	63																																																
	g	70	88																																																
	i	52	56																																																
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																																	
	<p>YHT-313 YHT-323 Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>69.5</td><td>71</td></tr> <tr><td></td><td>b</td><td>69.5</td><td>71</td></tr> <tr><td></td><td>c</td><td>56</td><td>56</td></tr> <tr><td></td><td>d</td><td>56</td><td>56</td></tr> <tr><td></td><td>e</td><td>28</td><td>28</td></tr> <tr><td></td><td>f</td><td>48</td><td>63</td></tr> <tr><td></td><td>g</td><td>70</td><td>88</td></tr> <tr><td></td><td>i</td><td>52</td><td>56</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	69.5	71		b	69.5	71		c	56	56		d	56	56		e	28	28		f	48	63		g	70	88		i	52	56	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																																	
Rated current(A)	16	32																																																	
Pole	3																																																		
Dimension(mm)	a	69.5	71																																																
	b	69.5	71																																																
	c	56	56																																																
	d	56	56																																																
	e	28	28																																																
	f	48	63																																																
	g	70	88																																																
	i	52	56																																																
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																																	

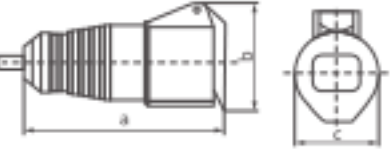

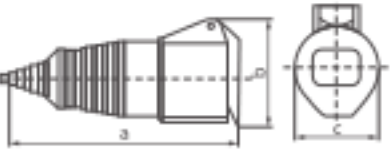


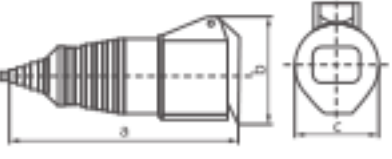


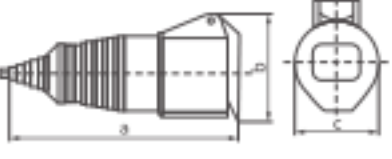



YHT Industrial Plugs and Socket

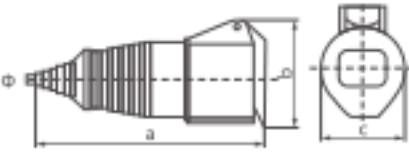

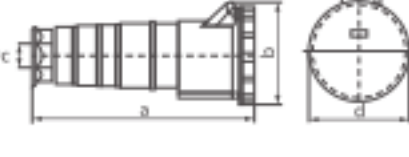









	<p>YHT-314 YHT-324 Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a: 70, b: 70, c: 56, d: 56, e: 28, f: 51, g: 80, h: 56, i: 56</td><td>71, 71, 56, 56, 28, 63, 88, 56</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a: 70, b: 70, c: 56, d: 56, e: 28, f: 51, g: 80, h: 56, i: 56	71, 71, 56, 56, 28, 63, 88, 56		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	16	32																					
Pole	4																						
Dimension(mm)	a: 70, b: 70, c: 56, d: 56, e: 28, f: 51, g: 80, h: 56, i: 56	71, 71, 56, 56, 28, 63, 88, 56																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-315 YHT-325 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a: 70, b: 70, c: 56, d: 56, e: 28, f: 51, g: 80, h: 56, i: 56</td><td>71, 71, 56, 56, 28, 63, 88, 56</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a: 70, b: 70, c: 56, d: 56, e: 28, f: 51, g: 80, h: 56, i: 56	71, 71, 56, 56, 28, 63, 88, 56		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	16	32																					
Pole	5																						
Dimension(mm)	a: 70, b: 70, c: 56, d: 56, e: 28, f: 51, g: 80, h: 56, i: 56	71, 71, 56, 56, 28, 63, 88, 56																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-333 YHT-343 Current(A): 63A,125A Voltage(V): 220-240V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70</td><td>120, 120, 101, 101, 65, 96, 130, 124, 88</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	3			Dimension(mm)	a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70	120, 120, 101, 101, 65, 96, 130, 124, 88		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	63	125																					
Pole	3																						
Dimension(mm)	a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70	120, 120, 101, 101, 65, 96, 130, 124, 88																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-334 YHT-344 Current(A): 63A,125A Voltage(V): 380-415V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70</td><td>120, 120, 101, 101, 65, 96, 130, 124, 88</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	4			Dimension(mm)	a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70	120, 120, 101, 101, 65, 96, 130, 124, 88		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	63	125																					
Pole	4																						
Dimension(mm)	a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70	120, 120, 101, 101, 65, 96, 130, 124, 88																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-335 YHT-345 Current(A): 63A,125A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70</td><td>120, 120, 101, 101, 65, 96, 130, 124, 88</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	5			Dimension(mm)	a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70	120, 120, 101, 101, 65, 96, 130, 124, 88		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	63	125																					
Pole	5																						
Dimension(mm)	a: 100, b: 100, c: 80, d: 80, e: 57, f: 86, g: 115, h: 109, i: 70	120, 120, 101, 101, 65, 96, 130, 124, 88																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-213-4 YHT-223-4 Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a: 131, b: 69, c: 50.5, Φ: 6-16</td><td>152, 94, 65, 8-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a: 131, b: 69, c: 50.5, Φ: 6-16	152, 94, 65, 8-20		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		4h																					
Rated current(A)	16	32																					
Pole	3																						
Dimension(mm)	a: 131, b: 69, c: 50.5, Φ: 6-16	152, 94, 65, 8-20																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					

YHT Industrial Plugs and Socket

	<p>YHT-213 YHT-223 Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a: 131, b: 69, c: 50.5, Φ: 6-16</td><td>152, 94, 65, 8-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a: 131, b: 69, c: 50.5, Φ: 6-16	152, 94, 65, 8-20		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	16	32																					
Pole	3																						
Dimension(mm)	a: 131, b: 69, c: 50.5, Φ: 6-16	152, 94, 65, 8-20																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-214 YHT-224 Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a: 131, b: 69, c: 50.5, Φ: 6-16</td><td>152, 94, 65, 8-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a: 131, b: 69, c: 50.5, Φ: 6-16	152, 94, 65, 8-20		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	16	32																					
Pole	4																						
Dimension(mm)	a: 131, b: 69, c: 50.5, Φ: 6-16	152, 94, 65, 8-20																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-215 YHT-225 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a: 141, b: 93, c: 64, Φ: 8-20</td><td>154, 101, 71, 8-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a: 141, b: 93, c: 64, Φ: 8-20	154, 101, 71, 8-20		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																					
Rated current(A)	16	32																					
Pole	5																						
Dimension(mm)	a: 141, b: 93, c: 64, Φ: 8-20	154, 101, 71, 8-20																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-213L-4 YHT-223L-4 Current(A): 16A,32A Voltage(V): 110-130V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a: 150, b: 69, c: 50.5, Φ: 7-16</td><td>182, 94, 65, 7-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td><td></td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a: 150, b: 69, c: 50.5, Φ: 7-16	182, 94, 65, 7-20		Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		4h																					
Rated current(A)	16	32																					
Pole	3																						
Dimension(mm)	a: 150, b: 69, c: 50.5, Φ: 7-16	182, 94, 65, 7-20																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																					
	<p>YHT-213L YHT-223L Current(A): 16A,32A Voltage(V): 220-240V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a: 150, b: 69, c: 50.5, Φ: 7-16</td><td>182, 94, 65, 7-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	3			Dimension(mm)	a: 150, b: 69, c: 50.5, Φ: 7-16	182, 94, 65, 7-20		Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																					
Rated current(A)	63	125																					
Pole	3																						
Dimension(mm)	a: 150, b: 69, c: 50.5, Φ: 7-16	182, 94, 65, 7-20																					
Cable nominal cross-section area(mm ²)	6-16	16-50																					
	<p>YHT-214L YHT-224L Current(A): 16A,32A Voltage(V): 380-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a: 150, b: 79, c: 56, Φ: 7-16</td><td>182, 94, 65, 7-20</td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td><td></td></tr> </table>	Earth contact position		6h		Rated current(A)	63	32		Pole	4			Dimension(mm)	a: 150, b: 79, c: 56, Φ: 7-16	182, 94, 65, 7-20		Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																					
Rated current(A)	63	32																					
Pole	4																						
Dimension(mm)	a: 150, b: 79, c: 56, Φ: 7-16	182, 94, 65, 7-20																					
Cable nominal cross-section area(mm ²)	6-16	16-50																					

YHT Industrial Plugs and Socket

	<p>YHT-215L YHT-225L Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">5</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>171</td><td>185</td></tr> <tr><td>b</td><td>93</td><td>101</td></tr> <tr><td>c</td><td>64</td><td>71</td></tr> <tr><td>Φ</td><td>7-20</td><td>7-20</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32			Pole				5			Dimension(mm)	a	171	185	b	93	101	c	64	71	Φ	7-20	7-20	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																		
Rated current(A)	16	32																																		
	Pole																																			
	5																																			
Dimension(mm)	a	171	185																																	
	b	93	101																																	
	c	64	71																																	
	Φ	7-20	7-20																																	
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																	
	<p>YHT-233 YHT-243 Current(A): 63A,125A Voltage(V): 220-240V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">3</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>240</td><td>309</td></tr> <tr><td>b</td><td>115</td><td>129</td></tr> <tr><td>c</td><td>16-38</td><td>30-64</td></tr> <tr><td>Φ</td><td>108</td><td>123</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125			Pole				3			Dimension(mm)	a	240	309	b	115	129	c	16-38	30-64	Φ	108	123	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																		
Rated current(A)	63	125																																		
	Pole																																			
	3																																			
Dimension(mm)	a	240	309																																	
	b	115	129																																	
	c	16-38	30-64																																	
	Φ	108	123																																	
Cable nominal cross-section area(mm ²)		6-16	16-50																																	
	<p>YHT-234 YHT-244 Current(A): 63A,125A Voltage(V): 380-415V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">4</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>240</td><td>309</td></tr> <tr><td>b</td><td>115</td><td>129</td></tr> <tr><td>c</td><td>16-38</td><td>30-64</td></tr> <tr><td>Φ</td><td>108</td><td>123</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125			Pole				4			Dimension(mm)	a	240	309	b	115	129	c	16-38	30-64	Φ	108	123	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																		
Rated current(A)	63	125																																		
	Pole																																			
	4																																			
Dimension(mm)	a	240	309																																	
	b	115	129																																	
	c	16-38	30-64																																	
	Φ	108	123																																	
Cable nominal cross-section area(mm ²)		6-16	16-50																																	
	<p>YHT-013L-4 YHT-023L-4 Current(A): 63A,125A Voltage(V): 320-380V~ 240-415V~ Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">5</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>240</td><td>309</td></tr> <tr><td>b</td><td>115</td><td>129</td></tr> <tr><td>c</td><td>16-38</td><td>30-64</td></tr> <tr><td>Φ</td><td>108</td><td>123</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125			Pole				5			Dimension(mm)	a	240	309	b	115	129	c	16-38	30-64	Φ	108	123	Cable nominal cross-section area(mm ²)		6-16	16-50
Earth contact position		6h																																		
Rated current(A)	63	125																																		
	Pole																																			
	5																																			
Dimension(mm)	a	240	309																																	
	b	115	129																																	
	c	16-38	30-64																																	
	Φ	108	123																																	
Cable nominal cross-section area(mm ²)		6-16	16-50																																	


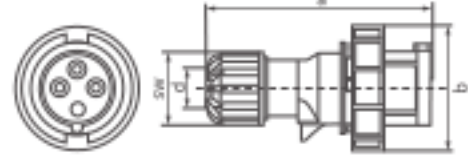

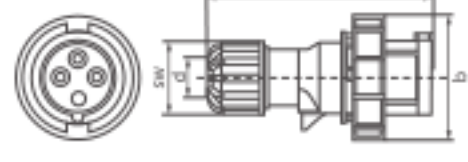

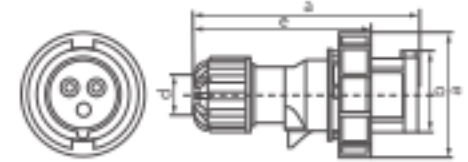

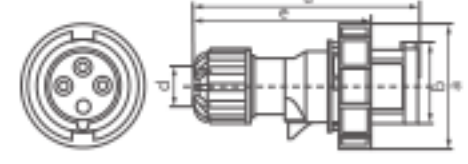

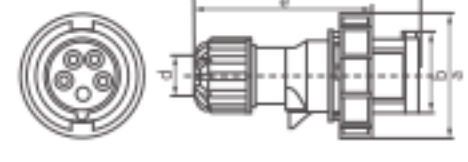

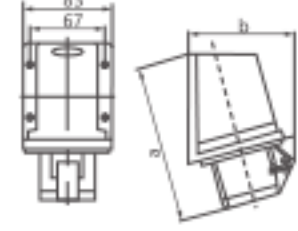
 <p>YHT-1012-4 Input: 1 plug 16A 110V Output: sockets 16A 110V Protection degree: IP44</p> 	 <p>YHT-1013-4 Input: 1 plug 16A 110V Output: 3 sockets 16A 110V Protection degree: IP44</p> 	 <p>YHT-1012 YHT-1022 Input: 1 plug 16A~32A 220V Output: 2 sockets 16A~32A 220V Protection degree: IP44</p> 
 <p>YHT-1013 YHT-1023 Input: 1 plug 16A~32A 220V Output: 3 sockets 16A~32A 220V Protection degree: IP44</p> 	 <p>YHT-1014-2 YHT-1024-2 Input: 1 plug 16A~32A 380V Output: 2 sockets 16A~32A 380V Protection degree: IP44</p> 	 <p>YHT-1014-2 YHT-1024-2 Input: 1 plug 16A~32A 380V Output: 3 sockets 16A~32A 380V Protection degree: IP44</p> 

YHT Mounted Plugs and Socket

	<p>YHT-N013-4 YHT-N023-4 Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">3</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>118</td><td>146</td></tr> <tr><td>b</td><td>82</td><td>100</td></tr> <tr><td>c</td><td>47</td><td>63</td></tr> <tr><td>d</td><td>6-15</td><td>10-20</td></tr> <tr><td>sw</td><td>38</td><td>50</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32			Pole				3			Dimension(mm)	a	118	146	b	82	100	c	47	63	d	6-15	10-20	sw	38	50		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		4h																																						
Rated current(A)	16	32																																						
	Pole																																							
	3																																							
Dimension(mm)	a	118	146																																					
	b	82	100																																					
	c	47	63																																					
	d	6-15	10-20																																					
sw	38	50																																						
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																					
	<p>YHT-N013 YHT-N023 Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">3</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>118</td><td>146</td></tr> <tr><td>b</td><td>82</td><td>100</td></tr> <tr><td>c</td><td>47</td><td>63</td></tr> <tr><td>d</td><td>6-15</td><td>10-20</td></tr> <tr><td>sw</td><td>38</td><td>50</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32			Pole				3			Dimension(mm)	a	118	146	b	82	100	c	47	63	d	6-15	10-20	sw	38	50		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																						
Rated current(A)	16	32																																						
	Pole																																							
	3																																							
Dimension(mm)	a	118	146																																					
	b	82	100																																					
	c	47	63																																					
	d	6-15	10-20																																					
sw	38	50																																						
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																					
	<p>YHT-N014 YHT-N024 Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">4</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>124</td><td>146</td></tr> <tr><td>b</td><td>88</td><td>100</td></tr> <tr><td>c</td><td>53</td><td>63</td></tr> <tr><td>d</td><td>6-15</td><td>10-20</td></tr> <tr><td>sw</td><td>38</td><td>50</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32			Pole				4			Dimension(mm)	a	124	146	b	88	100	c	53	63	d	6-15	10-20	sw	38	50		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																						
Rated current(A)	16	32																																						
	Pole																																							
	4																																							
Dimension(mm)	a	124	146																																					
	b	88	100																																					
	c	53	63																																					
	d	6-15	10-20																																					
sw	38	50																																						
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																					
	<p>YHT-N015 YHT-N025 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP44</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">5</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>131</td><td>152</td></tr> <tr><td>b</td><td>95</td><td>106</td></tr> <tr><td>c</td><td>61</td><td>70</td></tr> <tr><td>d</td><td>8-16</td><td>10-20</td></tr> <tr><td>sw</td><td>42</td><td>50</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32			Pole				5			Dimension(mm)	a	131	152	b	95	106	c	61	70	d	8-16	10-20	sw	42	50		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																						
Rated current(A)	16	32																																						
	Pole																																							
	5																																							
Dimension(mm)	a	131	152																																					
	b	95	106																																					
	c	61	70																																					
	d	8-16	10-20																																					
sw	42	50																																						
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																					
	<p>YHT-N0132-4 YHT-N0232-4 Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">3</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>118</td><td>146</td></tr> <tr><td>b</td><td>82</td><td>100</td></tr> <tr><td>c</td><td>47</td><td>63</td></tr> <tr><td>d</td><td>6-15</td><td>10-20</td></tr> <tr><td>sw</td><td>38</td><td>50</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32			Pole				3			Dimension(mm)	a	118	146	b	82	100	c	47	63	d	6-15	10-20	sw	38	50		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		4h																																						
Rated current(A)	16	32																																						
	Pole																																							
	3																																							
Dimension(mm)	a	118	146																																					
	b	82	100																																					
	c	47	63																																					
	d	6-15	10-20																																					
sw	38	50																																						
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																					
	<p>YHT-N0132 YHT-N0232 Current(A): 16A,32A Voltage(V): 220-240V~ 3P+E Protection degree: IP67</p> 		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td></td><td colspan="3">Pole</td></tr> <tr><td></td><td colspan="3">3</td></tr> <tr><td rowspan="4">Dimension(mm)</td><td>a</td><td>118</td><td>146</td></tr> <tr><td>b</td><td>82</td><td>100</td></tr> <tr><td>c</td><td>6-15</td><td>10-20</td></tr> <tr><td>sw</td><td>38</td><td>50</td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32			Pole				3			Dimension(mm)	a	118	146	b	82	100	c	6-15	10-20	sw	38	50	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6				
Earth contact position		6h																																						
Rated current(A)	16	32																																						
	Pole																																							
	3																																							
Dimension(mm)	a	118	146																																					
	b	82	100																																					
	c	6-15	10-20																																					
	sw	38	50																																					
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																					


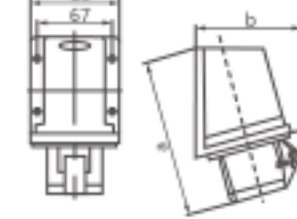

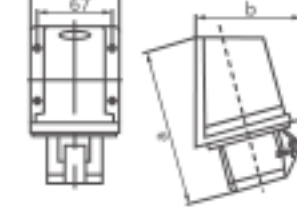

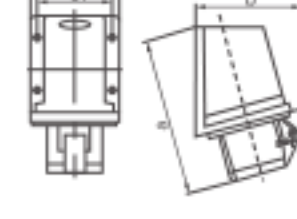

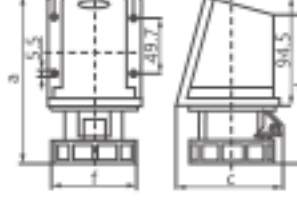

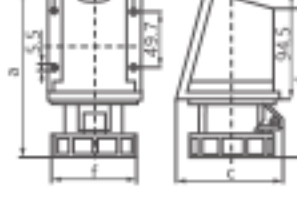

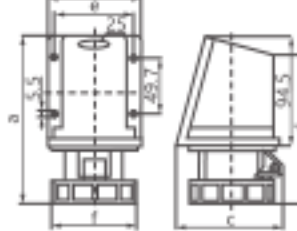
Electrical Accessories

YHT Mounted Plugs and Socket


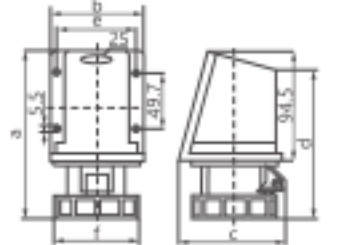

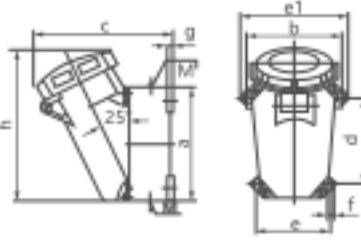

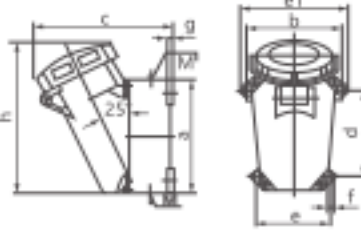

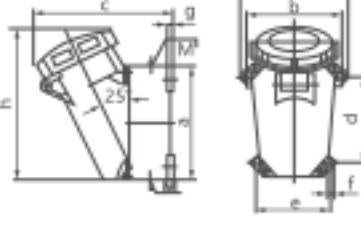

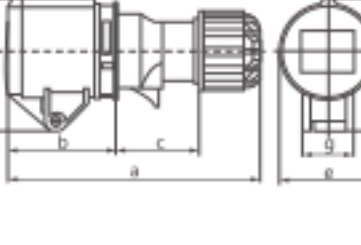

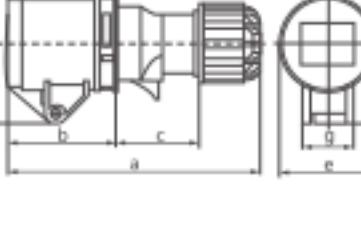
	<p>YHT-N0142 YHT-N0242 Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>124</td><td>146</td></tr> <tr><td></td><td>b</td><td>79</td><td>93</td></tr> <tr><td></td><td>c</td><td>6-15</td><td>10-20</td></tr> <tr><td></td><td>sw</td><td>38</td><td>50</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	124	146		b	79	93		c	6-15	10-20		sw	38	50	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6					
Earth contact position		6h																																				
Rated current(A)	16	32																																				
Pole	4																																					
Dimension(mm)	a	124	146																																			
	b	79	93																																			
	c	6-15	10-20																																			
	sw	38	50																																			
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																				
	<p>YHT-N0152 YHT-N0252 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>131</td><td>152</td></tr> <tr><td></td><td>b</td><td>87</td><td>100</td></tr> <tr><td></td><td>c</td><td>8-16</td><td>10-20</td></tr> <tr><td></td><td>d</td><td>42</td><td>50</td></tr> <tr><td></td><td>sw</td><td></td><td></td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a	131	152		b	87	100		c	8-16	10-20		d	42	50		sw			Cable nominal cross-section area(mm ²)	1-2.5	2.5-6	
Earth contact position		6h																																				
Rated current(A)	16	32																																				
Pole	5																																					
Dimension(mm)	a	131	152																																			
	b	87	100																																			
	c	8-16	10-20																																			
	d	42	50																																			
	sw																																					
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																				
	<p>YHT-N0332 YHT-N0432 Current(A): 63A,125A Voltage(V): 220-250V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>133</td><td>286</td></tr> <tr><td></td><td>b</td><td>75.5</td><td>219</td></tr> <tr><td></td><td>c</td><td>36.5</td><td>57</td></tr> <tr><td></td><td>d</td><td>240</td><td>286</td></tr> <tr><td></td><td>e</td><td>188</td><td>229</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td colspan="2">16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	3			Dimension(mm)	a	133	286		b	75.5	219		c	36.5	57		d	240	286		e	188	229	Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																																				
Rated current(A)	63	125																																				
Pole	3																																					
Dimension(mm)	a	133	286																																			
	b	75.5	219																																			
	c	36.5	57																																			
	d	240	286																																			
	e	188	229																																			
Cable nominal cross-section area(mm ²)	6-16	16-50																																				
	<p>YHT-N0342 YHT-N0442 Current(A): 63A,125A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>133</td><td>286</td></tr> <tr><td></td><td>b</td><td>75.5</td><td>219</td></tr> <tr><td></td><td>c</td><td>36.5</td><td>57</td></tr> <tr><td></td><td>d</td><td>240</td><td>286</td></tr> <tr><td></td><td>e</td><td>188</td><td>229</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td colspan="2">16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	4			Dimension(mm)	a	133	286		b	75.5	219		c	36.5	57		d	240	286		e	188	229	Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																																				
Rated current(A)	63	125																																				
Pole	4																																					
Dimension(mm)	a	133	286																																			
	b	75.5	219																																			
	c	36.5	57																																			
	d	240	286																																			
	e	188	229																																			
Cable nominal cross-section area(mm ²)	6-16	16-50																																				
	<p>YHT-N0352 YHT-N0452 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>133</td><td>286</td></tr> <tr><td></td><td>b</td><td>75.5</td><td>219</td></tr> <tr><td></td><td>c</td><td>36.5</td><td>57</td></tr> <tr><td></td><td>d</td><td>240</td><td>286</td></tr> <tr><td></td><td>e</td><td>188</td><td>229</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>6-16</td><td colspan="2">16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	5			Dimension(mm)	a	133	286		b	75.5	219		c	36.5	57		d	240	286		e	188	229	Cable nominal cross-section area(mm ²)	6-16	16-50	
Earth contact position		6h																																				
Rated current(A)	16	32																																				
Pole	5																																					
Dimension(mm)	a	133	286																																			
	b	75.5	219																																			
	c	36.5	57																																			
	d	240	286																																			
	e	188	229																																			
Cable nominal cross-section area(mm ²)	6-16	16-50																																				
	<p>YHT-N113-4 YHT-N123-4 Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>137</td><td>153</td></tr> <tr><td></td><td>b</td><td>84</td><td>101</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	137	153		b	84	101	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6													
Earth contact position		4h																																				
Rated current(A)	16	32																																				
Pole	3																																					
Dimension(mm)	a	137	153																																			
	b	84	101																																			
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																				

Electrical Accessories


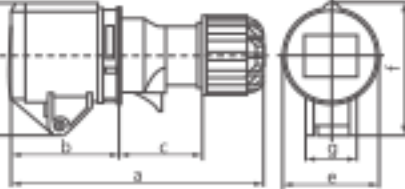

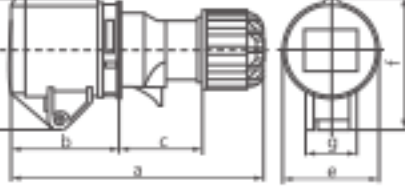

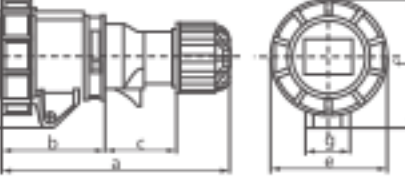

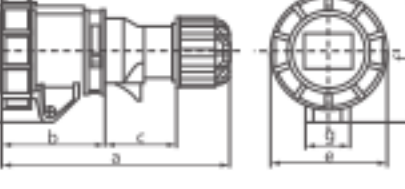

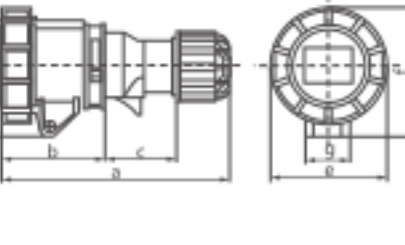

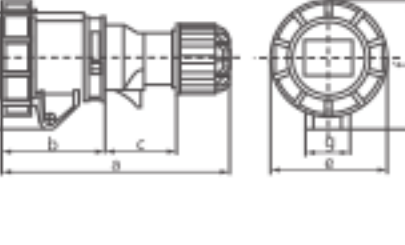
YHT Mounted Plugs and Socket

	<p>YHT-N113 YHT-N123 Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>137</td><td>153</td></tr> <tr><td></td><td>b</td><td>84</td><td>101</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	137	153		b	84	101	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																	
Earth contact position		6h																																								
Rated current(A)	16	32																																								
Pole	3																																									
Dimension(mm)	a	137	153																																							
	b	84	101																																							
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																								
	<p>YHT-N114 YHT-N124 Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>139</td><td>153</td></tr> <tr><td></td><td>b</td><td>95</td><td>101</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	139	153		b	95	101	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																	
Earth contact position		6h																																								
Rated current(A)	16	32																																								
Pole	4																																									
Dimension(mm)	a	139	153																																							
	b	95	101																																							
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																								
	<p>YHT-N115 YHT-N125 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td>Pole</td><td colspan="3">5</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>139</td><td>154</td></tr> <tr><td></td><td>b</td><td>99</td><td>104</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole	5			Dimension(mm)	a	139	154		b	99	104	Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																	
Earth contact position		6h																																								
Rated current(A)	63	125																																								
Pole	5																																									
Dimension(mm)	a	139	154																																							
	b	99	104																																							
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6																																								
	<p>YHT-N1132-4 YHT-N1232-4 Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>144</td><td>154</td></tr> <tr><td></td><td>b</td><td>80</td><td>80</td></tr> <tr><td></td><td>c</td><td>92.2</td><td>98.7</td></tr> <tr><td></td><td>d</td><td>129</td><td>133</td></tr> <tr><td></td><td>e</td><td>67.7</td><td>67.7</td></tr> <tr><td></td><td>f</td><td>71.5</td><td>93</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">4-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	144	154		b	80	80		c	92.2	98.7		d	129	133		e	67.7	67.7		f	71.5	93	Cable nominal cross-section area(mm ²)	1-2.5	4-6	
Earth contact position		4h																																								
Rated current(A)	16	32																																								
Pole	3																																									
Dimension(mm)	a	144	154																																							
	b	80	80																																							
	c	92.2	98.7																																							
	d	129	133																																							
	e	67.7	67.7																																							
	f	71.5	93																																							
Cable nominal cross-section area(mm ²)	1-2.5	4-6																																								
	<p>YHT-N1132 YHT-N1232 Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">3</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>144</td><td>154</td></tr> <tr><td></td><td>b</td><td>80</td><td>80</td></tr> <tr><td></td><td>c</td><td>92.2</td><td>98.7</td></tr> <tr><td></td><td>d</td><td>129</td><td>133</td></tr> <tr><td></td><td>e</td><td>67.7</td><td>67.7</td></tr> <tr><td></td><td>f</td><td>71.5</td><td>93</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">4-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	3			Dimension(mm)	a	144	154		b	80	80		c	92.2	98.7		d	129	133		e	67.7	67.7		f	71.5	93	Cable nominal cross-section area(mm ²)	1-2.5	4-6	
Earth contact position		6h																																								
Rated current(A)	16	32																																								
Pole	3																																									
Dimension(mm)	a	144	154																																							
	b	80	80																																							
	c	92.2	98.7																																							
	d	129	133																																							
	e	67.7	67.7																																							
	f	71.5	93																																							
Cable nominal cross-section area(mm ²)	1-2.5	4-6																																								
	<p>YHT-N1142 YHT-N1242 Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td>Pole</td><td colspan="3">4</td></tr> <tr><td>Dimension(mm)</td><td>a</td><td>144</td><td>154</td></tr> <tr><td></td><td>b</td><td>80</td><td>80</td></tr> <tr><td></td><td>c</td><td>94.2</td><td>98.7</td></tr> <tr><td></td><td>d</td><td>129</td><td>138</td></tr> <tr><td></td><td>e</td><td>67.7</td><td>67.7</td></tr> <tr><td></td><td>f</td><td>79</td><td>93</td></tr> <tr><td>Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td colspan="2">4-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole	4			Dimension(mm)	a	144	154		b	80	80		c	94.2	98.7		d	129	138		e	67.7	67.7		f	79	93	Cable nominal cross-section area(mm ²)	1-2.5	4-6	
Earth contact position		6h																																								
Rated current(A)	16	32																																								
Pole	4																																									
Dimension(mm)	a	144	154																																							
	b	80	80																																							
	c	94.2	98.7																																							
	d	129	138																																							
	e	67.7	67.7																																							
	f	79	93																																							
Cable nominal cross-section area(mm ²)	1-2.5	4-6																																								


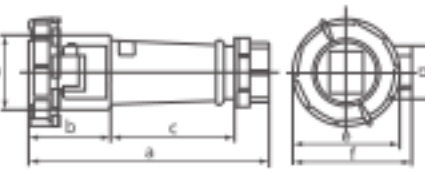

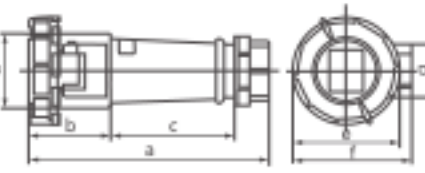

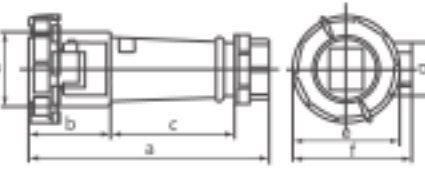

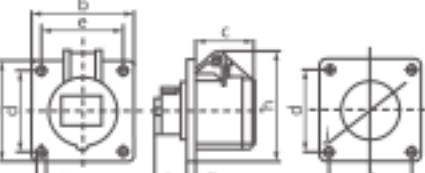

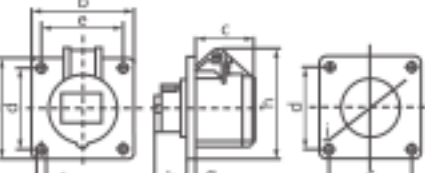

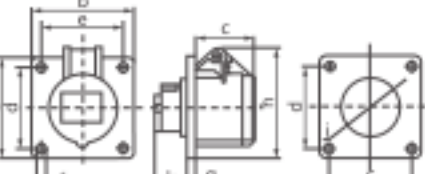
YHT Mounted Plugs and Socket

	<p>YHT-N1152 YHT-N1252 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">5</td></tr> <tr><td>a</td><td>144</td><td>160</td><td></td></tr> <tr><td>b</td><td>80</td><td>80</td><td></td></tr> <tr><td>c</td><td>95.3</td><td>106.7</td><td></td></tr> <tr><td>d</td><td>129</td><td>144</td><td></td></tr> <tr><td>e</td><td>67.7</td><td>67.7</td><td></td></tr> <tr><td>f</td><td>87.5</td><td>101</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>4-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		5		a	144	160		b	80	80		c	95.3	106.7		d	129	144		e	67.7	67.7		f	87.5	101		Cable nominal cross-section area(mm ²)		1-2.5	4-6												
Earth contact position		6h																																																					
Rated current(A)	16	32																																																					
Pole		5																																																					
a	144	160																																																					
b	80	80																																																					
c	95.3	106.7																																																					
d	129	144																																																					
e	67.7	67.7																																																					
f	87.5	101																																																					
Cable nominal cross-section area(mm ²)		1-2.5	4-6																																																				
	<p>YHT-N1332 YHT-N1432 Current(A): 63A,125A Voltage(V): 220-250V~ 2P+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td>a</td><td>171.3</td><td>262</td><td></td></tr> <tr><td>b</td><td>157</td><td>180</td><td></td></tr> <tr><td>c</td><td>159</td><td>210</td><td></td></tr> <tr><td>d</td><td>153.3</td><td>240</td><td></td></tr> <tr><td>e</td><td>108</td><td>140</td><td></td></tr> <tr><td>f</td><td>136</td><td>140</td><td></td></tr> <tr><td>g</td><td>216</td><td>286</td><td></td></tr> <tr><td>h</td><td>46</td><td>82</td><td></td></tr> <tr><td>m</td><td>M40</td><td>2+402+48</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-25</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole		3		a	171.3	262		b	157	180		c	159	210		d	153.3	240		e	108	140		f	136	140		g	216	286		h	46	82		m	M40	2+402+48		Cable nominal cross-section area(mm ²)		6-25	16-50
Earth contact position		6h																																																					
Rated current(A)	63	125																																																					
Pole		3																																																					
a	171.3	262																																																					
b	157	180																																																					
c	159	210																																																					
d	153.3	240																																																					
e	108	140																																																					
f	136	140																																																					
g	216	286																																																					
h	46	82																																																					
m	M40	2+402+48																																																					
Cable nominal cross-section area(mm ²)		6-25	16-50																																																				
	<p>YHT-N1342 YHT-N1442 Current(A): 63A,125A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td>a</td><td>171.3</td><td>262</td><td></td></tr> <tr><td>b</td><td>157</td><td>180</td><td></td></tr> <tr><td>c</td><td>159</td><td>210</td><td></td></tr> <tr><td>d</td><td>153.3</td><td>240</td><td></td></tr> <tr><td>e</td><td>108</td><td>140</td><td></td></tr> <tr><td>f</td><td>136</td><td>140</td><td></td></tr> <tr><td>g</td><td>216</td><td>286</td><td></td></tr> <tr><td>h</td><td>46</td><td>82</td><td></td></tr> <tr><td>m</td><td>M40</td><td>2+402+48</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-25</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole		4		a	171.3	262		b	157	180		c	159	210		d	153.3	240		e	108	140		f	136	140		g	216	286		h	46	82		m	M40	2+402+48		Cable nominal cross-section area(mm ²)		6-25	16-50
Earth contact position		6h																																																					
Rated current(A)	63	125																																																					
Pole		4																																																					
a	171.3	262																																																					
b	157	180																																																					
c	159	210																																																					
d	153.3	240																																																					
e	108	140																																																					
f	136	140																																																					
g	216	286																																																					
h	46	82																																																					
m	M40	2+402+48																																																					
Cable nominal cross-section area(mm ²)		6-25	16-50																																																				
	<p>YHT-N1352 YHT-N1452 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>63</td><td>125</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td>a</td><td>171.3</td><td>262</td><td></td></tr> <tr><td>b</td><td>157</td><td>180</td><td></td></tr> <tr><td>c</td><td>159</td><td>210</td><td></td></tr> <tr><td>d</td><td>153.3</td><td>240</td><td></td></tr> <tr><td>e</td><td>108</td><td>140</td><td></td></tr> <tr><td>f</td><td>136</td><td>140</td><td></td></tr> <tr><td>g</td><td>216</td><td>286</td><td></td></tr> <tr><td>h</td><td>46</td><td>82</td><td></td></tr> <tr><td>m</td><td>M40</td><td>2+402+48</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>6-25</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)	63	125		Pole		4		a	171.3	262		b	157	180		c	159	210		d	153.3	240		e	108	140		f	136	140		g	216	286		h	46	82		m	M40	2+402+48		Cable nominal cross-section area(mm ²)		6-25	16-50
Earth contact position		6h																																																					
Rated current(A)	63	125																																																					
Pole		4																																																					
a	171.3	262																																																					
b	157	180																																																					
c	159	210																																																					
d	153.3	240																																																					
e	108	140																																																					
f	136	140																																																					
g	216	286																																																					
h	46	82																																																					
m	M40	2+402+48																																																					
Cable nominal cross-section area(mm ²)		6-25	16-50																																																				
	<p>YHT-N213-4 YHT-N223-4 Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP44</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td>a</td><td>136</td><td>171</td><td></td></tr> <tr><td>b</td><td>61</td><td>75</td><td></td></tr> <tr><td>c</td><td>42.2</td><td>59</td><td></td></tr> <tr><td>d</td><td>72</td><td>88.6</td><td></td></tr> <tr><td>e</td><td>52.2</td><td>67.4</td><td></td></tr> <tr><td>f</td><td>72</td><td>88.6</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole		3		a	136	171		b	61	75		c	42.2	59		d	72	88.6		e	52.2	67.4		f	72	88.6		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6								
Earth contact position		4h																																																					
Rated current(A)	16	32																																																					
Pole		3																																																					
a	136	171																																																					
b	61	75																																																					
c	42.2	59																																																					
d	72	88.6																																																					
e	52.2	67.4																																																					
f	72	88.6																																																					
g	27.2	34.5																																																					
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																																				
	<p>YHT-N213 YHT-N223 Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP44</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td>a</td><td>136</td><td>171</td><td></td></tr> <tr><td>b</td><td>61</td><td>75</td><td></td></tr> <tr><td>c</td><td>42.2</td><td>59</td><td></td></tr> <tr><td>d</td><td>72</td><td>88.6</td><td></td></tr> <tr><td>e</td><td>52.2</td><td>67.4</td><td></td></tr> <tr><td>f</td><td>72</td><td>88.6</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		3		a	136	171		b	61	75		c	42.2	59		d	72	88.6		e	52.2	67.4		f	72	88.6		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6								
Earth contact position		6h																																																					
Rated current(A)	16	32																																																					
Pole		3																																																					
a	136	171																																																					
b	61	75																																																					
c	42.2	59																																																					
d	72	88.6																																																					
e	52.2	67.4																																																					
f	72	88.6																																																					
g	27.2	34.5																																																					
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																																				


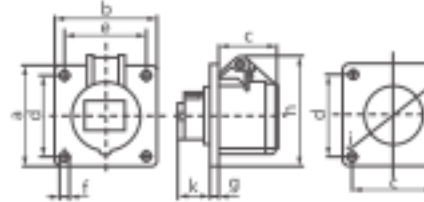

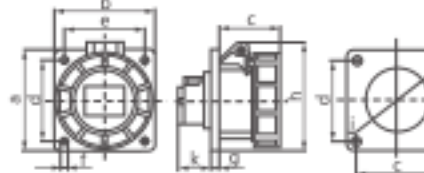

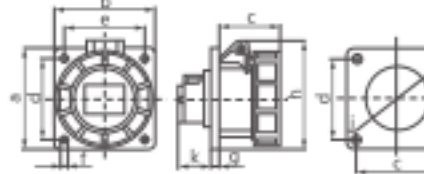

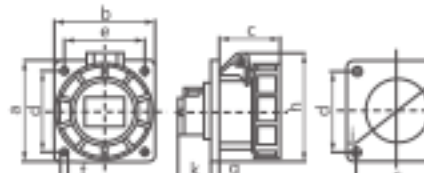

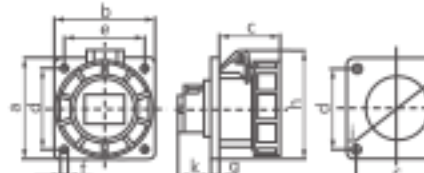

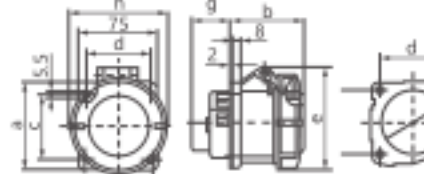
YHT Mounted Plugs and Socket

	<p>YHT-N214 YHT-N224 Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP44</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td>a</td><td>142.5</td><td>171</td><td></td></tr> <tr><td>b</td><td>62</td><td>75</td><td></td></tr> <tr><td>c</td><td>47.5</td><td>59</td><td></td></tr> <tr><td>d</td><td>77</td><td>88.6</td><td></td></tr> <tr><td>e</td><td>58.6</td><td>67.4</td><td></td></tr> <tr><td>f</td><td>77</td><td>88.6</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		4		a	142.5	171		b	62	75		c	47.5	59		d	77	88.6		e	58.6	67.4		f	77	88.6		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole		4																																													
a	142.5	171																																													
b	62	75																																													
c	47.5	59																																													
d	77	88.6																																													
e	58.6	67.4																																													
f	77	88.6																																													
g	27.2	34.5																																													
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																												
	<p>YHT-N215 YHT-N225 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP44</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">5</td></tr> <tr><td>a</td><td>150</td><td>176</td><td></td></tr> <tr><td>b</td><td>62</td><td>75</td><td></td></tr> <tr><td>c</td><td>55</td><td>64</td><td></td></tr> <tr><td>d</td><td>82.5</td><td>100.2</td><td></td></tr> <tr><td>e</td><td>65.3</td><td>73.5</td><td></td></tr> <tr><td>f</td><td>82.5</td><td>100.2</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		5		a	150	176		b	62	75		c	55	64		d	82.5	100.2		e	65.3	73.5		f	82.5	100.2		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole		5																																													
a	150	176																																													
b	62	75																																													
c	55	64																																													
d	82.5	100.2																																													
e	65.3	73.5																																													
f	82.5	100.2																																													
g	27.2	34.5																																													
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																												
	<p>YHT-N2132-4 YHT-N2232-4 Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td>a</td><td>139</td><td>172.8</td><td></td></tr> <tr><td>b</td><td>63.5</td><td>76.8</td><td></td></tr> <tr><td>c</td><td>42.2</td><td>59</td><td></td></tr> <tr><td>d</td><td>71.5</td><td>87.5</td><td></td></tr> <tr><td>e</td><td>71.5</td><td>93</td><td></td></tr> <tr><td>f</td><td>79.2</td><td>96.5</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)	16	32		Pole		3		a	139	172.8		b	63.5	76.8		c	42.2	59		d	71.5	87.5		e	71.5	93		f	79.2	96.5		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		4h																																													
Rated current(A)	16	32																																													
Pole		3																																													
a	139	172.8																																													
b	63.5	76.8																																													
c	42.2	59																																													
d	71.5	87.5																																													
e	71.5	93																																													
f	79.2	96.5																																													
g	27.2	34.5																																													
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																												
	<p>YHT-N2132 YHT-N2232 Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">3</td></tr> <tr><td>a</td><td>139</td><td>172.8</td><td></td></tr> <tr><td>b</td><td>63.5</td><td>76.8</td><td></td></tr> <tr><td>c</td><td>42.2</td><td>59</td><td></td></tr> <tr><td>d</td><td>71.5</td><td>87.5</td><td></td></tr> <tr><td>e</td><td>71.5</td><td>93</td><td></td></tr> <tr><td>f</td><td>79.2</td><td>96.5</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		3		a	139	172.8		b	63.5	76.8		c	42.2	59		d	71.5	87.5		e	71.5	93		f	79.2	96.5		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole		3																																													
a	139	172.8																																													
b	63.5	76.8																																													
c	42.2	59																																													
d	71.5	87.5																																													
e	71.5	93																																													
f	79.2	96.5																																													
g	27.2	34.5																																													
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																												
	<p>YHT-N2142 YHT-N2242 Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">4</td></tr> <tr><td>a</td><td>145</td><td>172.8</td><td></td></tr> <tr><td>b</td><td>64.5</td><td>76.8</td><td></td></tr> <tr><td>c</td><td>47.5</td><td>59</td><td></td></tr> <tr><td>d</td><td>77</td><td>87.5</td><td></td></tr> <tr><td>e</td><td>79</td><td>93</td><td></td></tr> <tr><td>f</td><td>85</td><td>96.5</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		4		a	145	172.8		b	64.5	76.8		c	47.5	59		d	77	87.5		e	79	93		f	85	96.5		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole		4																																													
a	145	172.8																																													
b	64.5	76.8																																													
c	47.5	59																																													
d	77	87.5																																													
e	79	93																																													
f	85	96.5																																													
g	27.2	34.5																																													
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																												
	<p>YHT-N2152 YHT-N2252 Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p>		<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><td>Rated current(A)</td><td>16</td><td>32</td><td></td></tr> <tr><td colspan="2">Pole</td><td colspan="2">5</td></tr> <tr><td>a</td><td>152</td><td>178.5</td><td></td></tr> <tr><td>b</td><td>64.5</td><td>77.5</td><td></td></tr> <tr><td>c</td><td>55</td><td>64</td><td></td></tr> <tr><td>d</td><td>84</td><td>99</td><td></td></tr> <tr><td>e</td><td>87.5</td><td>101</td><td></td></tr> <tr><td>f</td><td>91</td><td>108.5</td><td></td></tr> <tr><td>g</td><td>27.2</td><td>34.5</td><td></td></tr> <tr><td colspan="2">Cable nominal cross-section area(mm²)</td><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)	16	32		Pole		5		a	152	178.5		b	64.5	77.5		c	55	64		d	84	99		e	87.5	101		f	91	108.5		g	27.2	34.5		Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																													
Rated current(A)	16	32																																													
Pole		5																																													
a	152	178.5																																													
b	64.5	77.5																																													
c	55	64																																													
d	84	99																																													
e	87.5	101																																													
f	91	108.5																																													
g	27.2	34.5																																													
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																												

YHT Mounted Plugs and Socket


	<p>YHT-N2332 YHT-N2432</p> <p>Current(A): 63A,125A Voltage(V): 220-250V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>63</td><td>125</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">3</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>260</td><td>300</td></tr> <tr><td>b</td><td>104</td><td>140</td></tr> <tr><td>c</td><td>95.8</td><td>100</td></tr> <tr><td>d</td><td>77.4</td><td>89.5</td></tr> <tr><td>e</td><td>112.5</td><td>121</td></tr> <tr><td>f</td><td>109</td><td>125</td></tr> <tr><td>g</td><td>24</td><td>34.5</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		3		Dimension(mm)	a	260	300	b	104	140	c	95.8	100	d	77.4	89.5	e	112.5	121	f	109	125	g	24	34.5	Cable nominal cross-section area(mm ²)		6-16	16-50			
Earth contact position		6h																																									
Rated current(A)		63	125																																								
Pole		3																																									
Dimension(mm)	a	260	300																																								
	b	104	140																																								
	c	95.8	100																																								
	d	77.4	89.5																																								
	e	112.5	121																																								
	f	109	125																																								
	g	24	34.5																																								
Cable nominal cross-section area(mm ²)		6-16	16-50																																								
	<p>YHT-N2342 YHT-N2442</p> <p>Current(A): 63A,125A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>63</td><td>125</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">4</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>260</td><td>300</td></tr> <tr><td>b</td><td>104</td><td>140</td></tr> <tr><td>c</td><td>95.8</td><td>100</td></tr> <tr><td>d</td><td>77.4</td><td>89.5</td></tr> <tr><td>e</td><td>112.5</td><td>121</td></tr> <tr><td>f</td><td>109</td><td>125</td></tr> <tr><td>g</td><td>24</td><td>34.5</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		4		Dimension(mm)	a	260	300	b	104	140	c	95.8	100	d	77.4	89.5	e	112.5	121	f	109	125	g	24	34.5	Cable nominal cross-section area(mm ²)		6-16	16-50			
Earth contact position		6h																																									
Rated current(A)		63	125																																								
Pole		4																																									
Dimension(mm)	a	260	300																																								
	b	104	140																																								
	c	95.8	100																																								
	d	77.4	89.5																																								
	e	112.5	121																																								
	f	109	125																																								
	g	24	34.5																																								
Cable nominal cross-section area(mm ²)		6-16	16-50																																								
	<p>YHT-N2352 YHT-N2452</p> <p>Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>63</td><td>125</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">5</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>260</td><td>300</td></tr> <tr><td>b</td><td>104</td><td>140</td></tr> <tr><td>c</td><td>95.8</td><td>100</td></tr> <tr><td>d</td><td>77.4</td><td>89.5</td></tr> <tr><td>e</td><td>112.5</td><td>121</td></tr> <tr><td>f</td><td>109</td><td>125</td></tr> <tr><td>g</td><td>24</td><td>34.5</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>6-16</td><td>16-50</td></tr> </table>	Earth contact position		6h		Rated current(A)		63	125	Pole		5		Dimension(mm)	a	260	300	b	104	140	c	95.8	100	d	77.4	89.5	e	112.5	121	f	109	125	g	24	34.5	Cable nominal cross-section area(mm ²)		6-16	16-50			
Earth contact position		6h																																									
Rated current(A)		63	125																																								
Pole		5																																									
Dimension(mm)	a	260	300																																								
	b	104	140																																								
	c	95.8	100																																								
	d	77.4	89.5																																								
	e	112.5	121																																								
	f	109	125																																								
	g	24	34.5																																								
Cable nominal cross-section area(mm ²)		6-16	16-50																																								
	<p>YHT-N313-4 YHT-N323-4</p> <p>Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">4h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">3</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>49.2</td><td>62.2</td></tr> <tr><td>c</td><td>40</td><td>60</td></tr> <tr><td>d</td><td>40</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		4h		Rated current(A)		16	32	Pole		3		Dimension(mm)	a	75	75	b	49.2	62.2	c	40	60	d	40	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		4h																																									
Rated current(A)		16	32																																								
Pole		3																																									
Dimension(mm)	a	75	75																																								
	b	49.2	62.2																																								
	c	40	60																																								
	d	40	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N313 YHT-N323</p> <p>Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">3</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>49.2</td><td>62.2</td></tr> <tr><td>c</td><td>40</td><td>60</td></tr> <tr><td>d</td><td>40</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		3		Dimension(mm)	a	75	75	b	49.2	62.2	c	40	60	d	40	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		3																																									
Dimension(mm)	a	75	75																																								
	b	49.2	62.2																																								
	c	40	60																																								
	d	40	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N314 YHT-N324</p> <p>Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">4</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>45.2</td><td>62.2</td></tr> <tr><td>c</td><td>40</td><td>60</td></tr> <tr><td>d</td><td>40</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		4		Dimension(mm)	a	75	75	b	45.2	62.2	c	40	60	d	40	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		4																																									
Dimension(mm)	a	75	75																																								
	b	45.2	62.2																																								
	c	40	60																																								
	d	40	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								

YHT Mounted Plugs and Socket

	<p>YHT-N315 YHT-N325</p> <p>Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP44</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">4</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>51.2</td><td>67</td></tr> <tr><td>c</td><td>60</td><td>60</td></tr> <tr><td>d</td><td>60</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		4		Dimension(mm)	a	75	75	b	51.2	67	c	60	60	d	60	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		4																																									
Dimension(mm)	a	75	75																																								
	b	51.2	67																																								
	c	60	60																																								
	d	60	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N3132-4 YHT-N3232-4</p> <p>Current(A): 16A,32A Voltage(V): 110-130V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">3</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>46.1</td><td>57.7</td></tr> <tr><td>c</td><td>60</td><td>60</td></tr> <tr><td>d</td><td>60</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		3		Dimension(mm)	a	75	75	b	46.1	57.7	c	60	60	d	60	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		3																																									
Dimension(mm)	a	75	75																																								
	b	46.1	57.7																																								
	c	60	60																																								
	d	60	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N3132 YHT-N3232</p> <p>Current(A): 16A,32A Voltage(V): 220-240V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">3</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>46.1</td><td>57.7</td></tr> <tr><td>c</td><td>60</td><td>60</td></tr> <tr><td>d</td><td>60</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		3		Dimension(mm)	a	75	75	b	46.1	57.7	c	60	60	d	60	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		3																																									
Dimension(mm)	a	75	75																																								
	b	46.1	57.7																																								
	c	60	60																																								
	d	60	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N3142 YHT-N3242</p> <p>Current(A): 16A,32A Voltage(V): 380-415V~ 3P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">4</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>47.7</td><td>57.7</td></tr> <tr><td>c</td><td>60</td><td>60</td></tr> <tr><td>d</td><td>60</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		4		Dimension(mm)	a	75	75	b	47.7	57.7	c	60	60	d	60	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		4																																									
Dimension(mm)	a	75	75																																								
	b	47.7	57.7																																								
	c	60	60																																								
	d	60	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N3152 YHT-N3252</p> <p>Current(A): 16A,32A Voltage(V): 220-380V~ 240-415V~ 3P+N+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">5</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>75</td><td>75</td></tr> <tr><td>b</td><td>47.7</td><td>63.5</td></tr> <tr><td>c</td><td>60</td><td>60</td></tr> <tr><td>d</td><td>60</td><td>60</td></tr> <tr><td>e</td><td>5.5</td><td>5.5</td></tr> <tr><td>f</td><td>6</td><td>6</td></tr> <tr><td>g</td><td>23</td><td>25</td></tr> <tr><td>h</td><td>42</td><td>35</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		5		Dimension(mm)	a	75	75	b	47.7	63.5	c	60	60	d	60	60	e	5.5	5.5	f	6	6	g	23	25	h	42	35	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		5																																									
Dimension(mm)	a	75	75																																								
	b	47.7	63.5																																								
	c	60	60																																								
	d	60	60																																								
	e	5.5	5.5																																								
	f	6	6																																								
	g	23	25																																								
h	42	35																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								
	<p>YHT-N3332 YHT-N3432</p> <p>Current(A): 63A,125A Voltage(V): 220-250V~ 2P+E Protection degree: IP67</p> 	<table border="1"> <tr><th colspan="2">Earth contact position</th><th colspan="2">6h</th></tr> <tr><th colspan="2">Rated current(A)</th><td>16</td><td>32</td></tr> <tr><th colspan="2">Pole</th><td colspan="2">3</td></tr> <tr><th rowspan="7">Dimension(mm)</th><td>a</td><td>55</td><td>75</td></tr> <tr><td>b</td><td>51</td><td>61</td></tr> <tr><td>c</td><td>45</td><td>60</td></tr> <tr><td>d</td><td>45</td><td>60</td></tr> <tr><td>e</td><td>75</td><td>96</td></tr> <tr><td>f</td><td>19</td><td>20</td></tr> <tr><td>g</td><td>33</td><td>41</td></tr> <tr><td>h</td><td>44</td><td>58</td></tr> <tr><th colspan="2">Cable nominal cross-section area(mm²)</th><td>1-2.5</td><td>2.5-6</td></tr> </table>	Earth contact position		6h		Rated current(A)		16	32	Pole		3		Dimension(mm)	a	55	75	b	51	61	c	45	60	d	45	60	e	75	96	f	19	20	g	33	41	h	44	58	Cable nominal cross-section area(mm ²)		1-2.5	2.5-6
Earth contact position		6h																																									
Rated current(A)		16	32																																								
Pole		3																																									
Dimension(mm)	a	55	75																																								
	b	51	61																																								
	c	45	60																																								
	d	45	60																																								
	e	75	96																																								
	f	19	20																																								
	g	33	41																																								
h	44	58																																									
Cable nominal cross-section area(mm ²)		1-2.5	2.5-6																																								

Electrical Accessories

Connecting Terminals

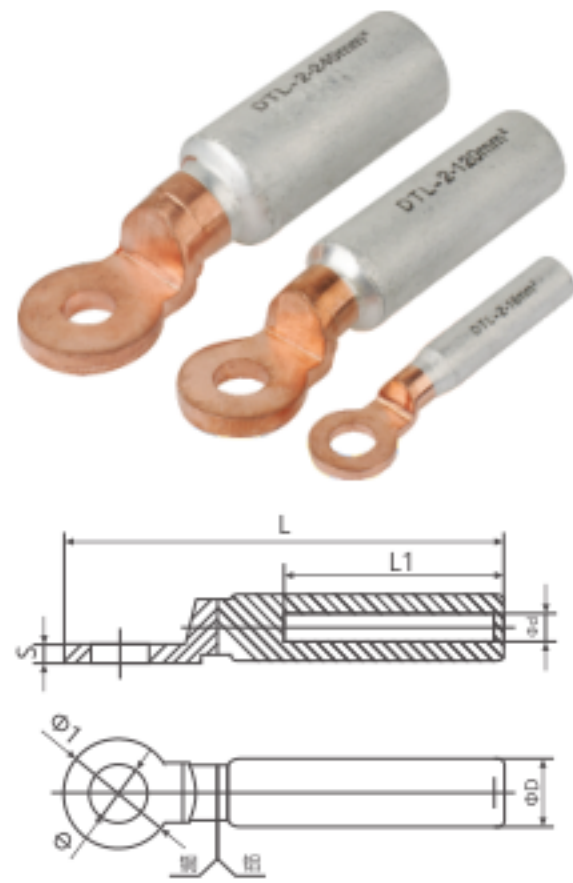


DTL-2 Copper-aluminium Connecting Terminals

Model & Spec.	Dimension(mm)						
	ΦD	Φd	S	L	L1	Φ	Φ1
DTL-2-10	12	5.2	3.5	80	40	10.5	20
DTL-2-16	12	6.1	3.5	80	40	10.5	20
DTL-2-25	16	7.1	4.0	90	45	13	24
DTL-2-35	16	8.5	4.0	90	45	13	24
DTL-2-50	20	9.8	5.0	95	47	13	24
DTL-2-70	20	11.5	5.0	95	47	13	24
DTL-2-95	20	13.5	5.0	95	47	13	24
DTL-2-120	25	15	5.5	119	60	13	30
DTL-2-150	25	17	5.5	119	60	13	30
DTL-2-185	32	18.5	6.2	128	62	13	35
DTL-2-240	32	21.5	6.2	128	62	13	35
DTL-2-300	34	24	7.0	140	72	13	36
DTL-2-400	42	27	7.5	165	85	17	40
DTL-2-500	42	30	7.5	165	85	17	40

Note: DTL-2-10 D: wiring terminals; T: copper; L: Aluminum; 2: round head; 10: conductor section.

Application

Connecting terminals are suitable for the conjunction of wires, cables in the distribution equipment and the electrical equipment. DL series of aluminum connecting terminals are pressed with aluminium bar(L3), DT series of copper connecting terminals with copper bar(T2).

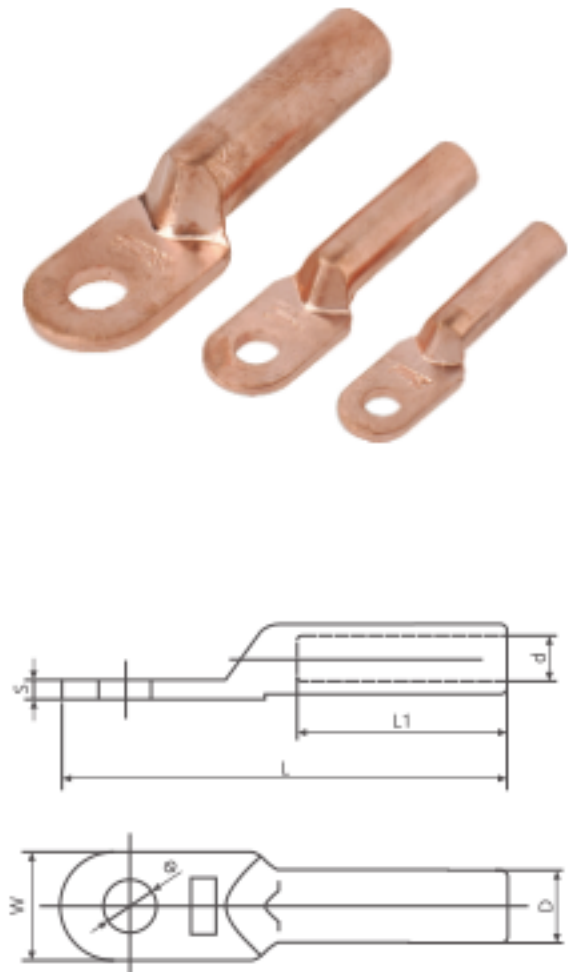


DT Copper Connecting Terminals

Model & Spec.	Dimension(mm)						
	Φ	D	d	L	L1	W	S
DT-10	8.5	9	5.2	62	26	16	2.5
DT-16	8.5	10	6.1	68	30	16	2.5
DT-25	8.5	11	7.1	70	33	18	2.7
DT-35	10.5	12	8.5	80	36	20.5	3.0
DT-50	10.5	14	9.8	86	38	23	3.4
DT-70	12.5	16	11.5	95	43	26	3.8
DT-95	12.5	18	13.5	104	46	28	4.2
DT-120	14.5	20	15	112	49	30	4.7
DT-150	14.5	22	17	120	51	34	5.5
DT-185	16.5	25	18.6	126	55	37	5.8
DT-240	16.5	27	21.5	137	60	40	6.5
DT-300	21	31	24	158	68	50	8.0
DT-400	21	34	27	175	78	50	9.0
DT-500	21	38	30	186	82	60	10.0
DT-630	21	45	34.2	215	86	80	12.0

Note: DT-10 D: wiring terminals; T: copper; 10: conductor section.

Electrical Accessories

Connecting Terminals

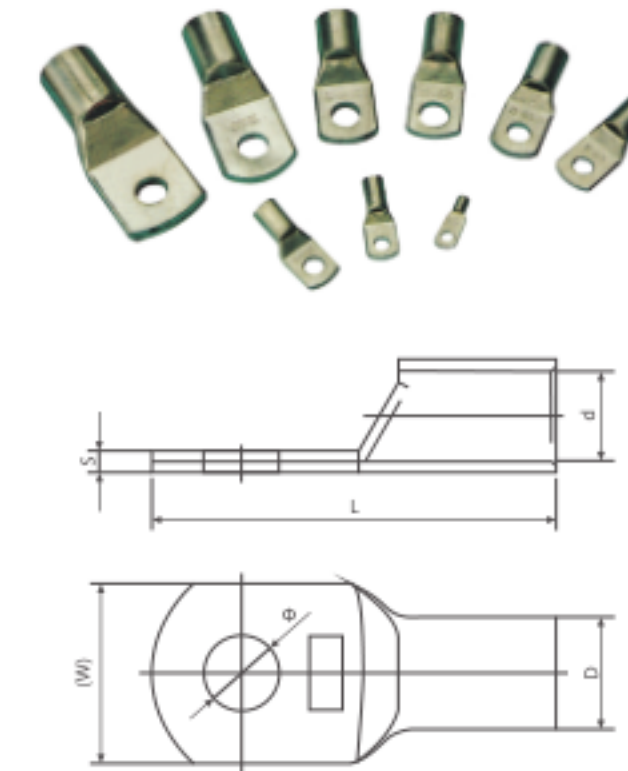

Application

These products are suitable for the connection of copper conductors (section area 1.5mm²-1000mm²) in power cable with electronic equipment and they are made of copper tube T2 and coated with tin. Their working temperature -55°C-150°C.

SC(JGK) Imported Copper Terminals

Model & Spec.	Dimension(mm)					
	Φ	D	d	L	(W)	S
SC(JGK)-1.5	4.2, 5.2	3.5	2.5	18	7	1
SC(JGK)-2.5	4.2, 5.2	4	3	19	8	1
SC(JGK)-4	5.2, 6.4	4.8	3.5	20	8	1.2
SC(JGK)-6	5.2, 6.4	5.5	4.1	23	9	1.4
SC(JGK)-10	6.4, 8.4	6.7	5	25.5	11	1.6
SC(JGK)-16	6.4, 8.4	7.5	5.8	30	12	1.8
SC(JGK)-25	6.4, 8.4, 10.5	9	7.2	32.5	13	1.8
SC(JGK)-35	6.4, 8.4, 10.5	10.5	8.5	37	15	2
SC(JGK)-50	8.4, 10.5	12.5	10.1	45	18	2.4
SC(JGK)-70	10.5, 12.5	14.5	11.7	49	21	2.8
SC(JGK)-95	10.5, 12.5	17	13.8	54	25	3.2
SC(JGK)-120	12.5, 16.5	19.5	15.9	62	28	3.6
SC(JGK)-150	12.5, 16.5	20.5	16.7	68	30	3.8
SC(JGK)-185	16.5	23.5	19.1	76	34	4.4
SC(JGK)-240	16.5	26	21.4	90	38	4.6
SC(JGK)-300	16.5, 20.5	30	24.6	100	44	5.4
SC(JGK)-400	16.5, 20.5	34	27.4	110	50	6.6
SC(JGK)-500	16.5, 20.5	38	30.8	120	55	7.2
SC(JGK)-630	20.5	45	35.6	135	65	9.2
SC(JGK)-800	22.5	50	40.4	170	72	9.6
SC(JGK)-1000	22.5	55	45	200	80	10

Application


These products are applicable to connecting the circular wire and hemicycle-sertor wire in distribution equipment or power supply cables. GTL series hole-passing connecting tube is made of friction-welding craft, both top quality.

GTL Copper-aluminium Connecting Tube(Oil Seal)

Model & Spec.	Dimension(mm)						
	D	d	D1	d1	L1	L2	L
GTL-16	11	6.1	9	5.2	30	25	70
GTL-25	12	7.1	10	6.1	33	27	75
GTL-35	14	8.5	11	7.1	40	30	85
GTL-50	16	9.8	13	8.5	42	32	95
GTL-70	18	11.5	15	9.8	46	38	105
GTL-95	21	13.5	17	11.5	50	40	110
GTL-120	23	15	19	13.5	55	42	112
GTL-150	25	17	21	15	55	44	118
GTL-185	27	18.6	23	17	58	46	125
GTL-240	30	21.5	26	18.6	60	54	130
GTL-300	34	24	28	21.5	66	56	145
GTL-400	38	27	30	24	70	60	155
GTL-500	45	30	34	27	75	65	165

Note: GTL-16 G: wiring terminals; T: copper; L: Aluminum; 16: conductor section.

Connecting Terminals

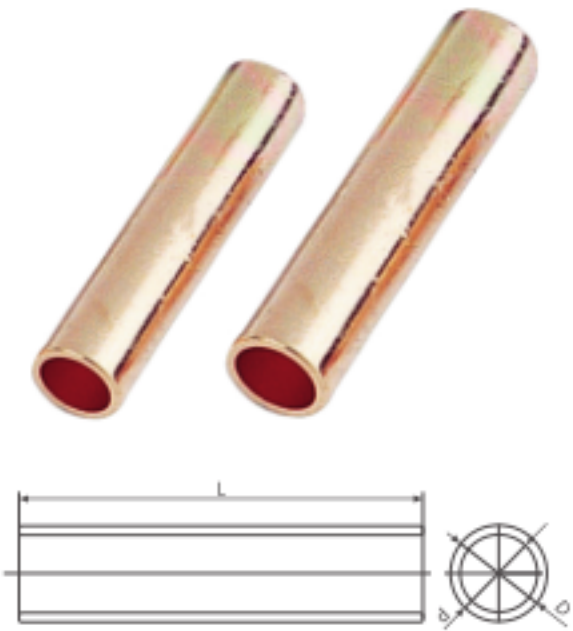

Application


These products are applicable to connecting the circular wire and hemicycle-sertor wire in distribution equipment or power supply cables. GT series connecting tube is made of copper tube. GTL series hole-passing connecting tube is made of friction-welding craft, both top quality.

GT Copper Connecting Tube(Passing Through)

Model & Spec.	Dimension(mm)		
	D	d	L
GT-1-10	8	5	52
GT-1-16	9	6	56
GT-1-25	10	7	60
GT-1-35	11	8.4	65
GT-1-50	13	10	73
GT-1-70	16	12	80
GT-1-95	18	14	85
GT-1-120	19	15	93
GT-1-150	22	17	100
GT-1-185	24	19	105
GT-1-240	26	21	110
GT-1-300	31	24	120
GT-1-400	34	26	135
GT-1-500	38	30	150
GT-1-630	45	35	170
GT-1-800	50	40	225
GT-1-1000	55	45	250

Note: GT-2-1.5 G: connecting tube; T: copper; 1: oil-block type; 1.5: conductor section.

GTY Copper Connecting Tube(Passing Through)

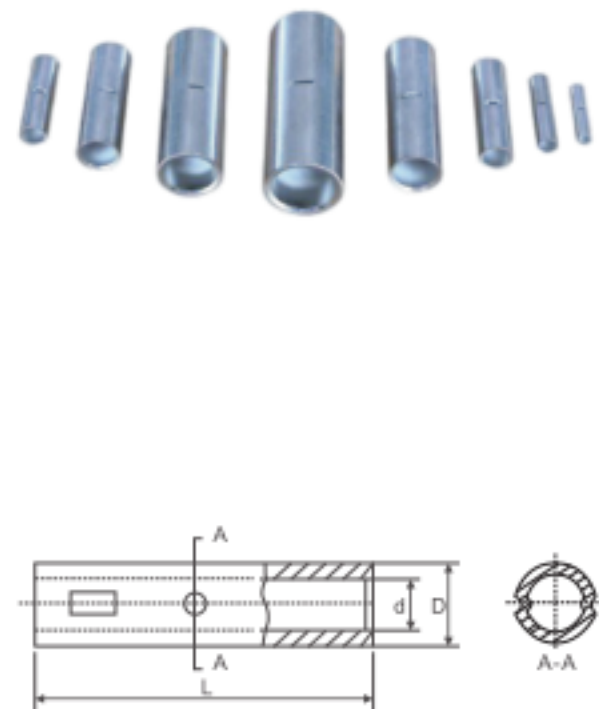

Catalog No.	Dimension(mm)		
	D	d	L
GTY-1.5	3.7	2.5	20
GTY-2.5	4	3	20
GTY-4	4.8	3.3	20
GTY-5.5	5.5	4.3	25
GTY-10	6.8	4.8	30
GTY-16	7.5	5.5	35
GTY-25	9	7	40
GTY-35	10.5	8.2	45
GTY-50	12.5	9.8	50
GTY-70	14.5	11.5	55
GTY-95	17.5	13.5	60
GTY-120	19.5	15	65
GTY-150	21	16.5	70
GTY-185	23.5	18.5	75
GTY-240	26.5	21	80
GTY-300	30	24	85
GTY-400	34	27	90
GTY-500	38	30	100
GTY-630	45	35	110
GTY-800	50	39	150
GTY-1000	56	44	170

Insulated Ring Terminals




Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=19A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
RV1.25-3	#4	3.2mm	5.7	17.8	4.95	10.0	4.3	Red
RVS1.25-3.5	#6	3.7mm	5.7	17.8	4.95			
RVM1.25-3.5	#6	3.7mm	6.6	20.1	6.3			
RV1.25-5S	#10	5.3mm	8.0	21.5	7.0			
RV1.25-5L	#10	5.3mm	9.5	23.3	8.0			
RVS1.25-4	#8	4.3mm	6.8	20.1	6.3			
RVL1.25-4	#8	4.3mm	8.0	21.5	7.0			
RV1.25-5	#10	5.3mm	8.0	21.5	7.0			
RV1.25-6	1/4	6.5mm	11.6	27.5	11.1			
RV1.25-8	5/16	8.4mm	11.6	27.5	11.1			
RV1.25-12	3/8	10.5mm	13.6	31.6	13.9			

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
RV2-3	#4	3.2mm	6.6	17.8	4.3	10.0	4.9	Blue
RVS2-3.5	#6	3.7mm	6.6	17.8	4.3			
RVS2-4	#8	4.3mm	6.6	21.0	7.0			
RVL2-4	#8	4.3mm	8.5	22.5	7.75			
RVS2-5	#10	5.3mm	8.5	22.5	7.75			
RVL2-5	#10	5.3mm	9.5	22.5	7.25			
RV2-6	1/4	6.5mm	12.0	27.6	11.0			
RV2-8	5/16	8.4mm	12.0	27.6	11.0			
RV2-10	3/8	10.5mm	13.6	30.2	13.9			

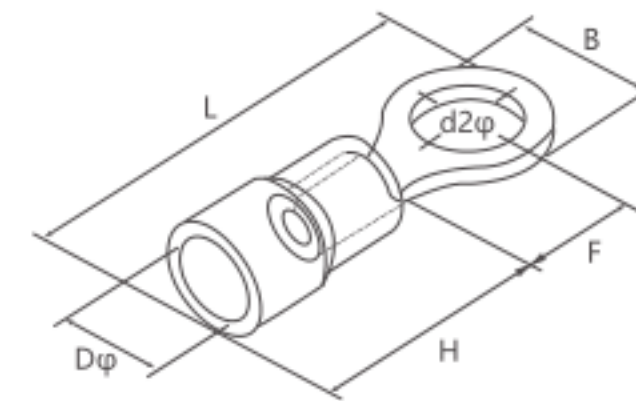

Conductor cross-section: 2.5-4mm²; American Wire Gauge: 14-12;
Maximum current: I_{max}=37A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
RV3.5-4	#8	4.3mm	8.0	24.5	7.7	12.5	6.2	Black
RV3.5-5	#10	5.3mm	8.0	24.5	7.7			
RV3.5-6	1/4	6.5mm	12.0	27.9	7.7			
RV3.5-8	5/16	8.4mm	15.0	32.0	13.5			
RV3.5-10	3/8	10.5mm	15.0	32.0	13.5			

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
RV5.5-3.5	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	Yellow
RVS5.5-4	#8	4.3mm	7.2	21.4	5.9			
RVL5.5-4	#8	4.3mm	9.5	25.5	8.3			
RV5.5-5	#10	5.3mm	9.5	25.5	8.3			
RV5.5-6	1/4	6.5mm	12.0	31.5	13.0			
RV5.5-8	5/16	8.4mm	15.0	33.7	13.7			
RV5.5-10	3/8	10.5mm	15.0	33.7	13.7			
RV5.5-12	1/2	13.0mm	19.2	38.1	16.0			

Electrical Accessories


Non-Insulated Ring Terminals



Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=19A

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB1.25-3	#4	3.2mm	5.7	12.6	4.95	10.0	4.3	1.7
RNBS1.25-3.5	#6	3.7mm	5.7	12.6	4.95			
RNBM1.25-3.5	#6	3.7mm	6.6	14.4	6.3			
RNBS1.25-4	#8	4.3mm	6.8	14.4	6.3			
RNBL1.25-4	#8	4.3mm	8.0	15.8	7.0			
RNB1.25-5	#10	5.3mm	8.0	15.8	7.0			
RNB1.25-6	1/4	5.3mm	11.6	21.8	11.1			
RNB1.25-8	5/16	8.4mm	11.6	21.8	11.1			
RNB1.25-10	3/8	10.5mm	13.6	25.5	13.9			

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

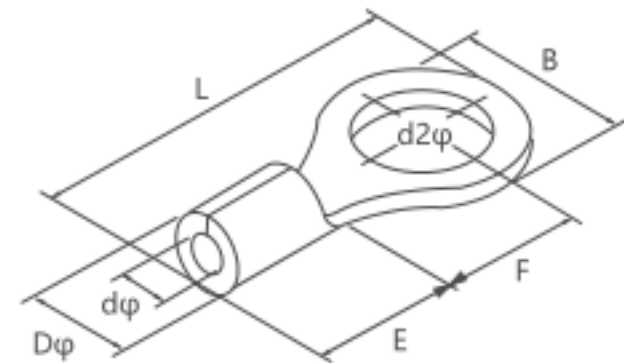

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB2-3	#4	3.2mm	6.6	12.3	4.3	4.8	4.1	2.3
RNBS2-4	#8	4.3mm	6.6	16.0	7.0			
RNBL2-4	#8	4.3mm	8.5	16.8	7.75			
RNBS2-5	#10	5.3mm	8.5	16.8	7.75			
RNBL2-5	#10	5.3mm	9.5	16.8	7.25			
RNB2-6	1/4	6.5mm	12.0	21.8	11.0			
RNB2-8	5/16	8.4mm	12.0	21.8	11.0			
RNB2-12	3/8	10.5mm	13.6	25.5	13.9			

Conductor cross-section: 2.5-4mm²; American Wire Gauge: 14-12;
Maximum current: I_{max}=37A

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB3.5-4	#8	4.3mm	8.0	18.0	7.7	6.5	5.0	3.0
RNBS3.5-5	#10	5.3mm	8.0	18.0	7.7			
RNBL3.5-5	#10	5.3mm	12.0	12.0	7.7			
RNB3.5-6	1/4	6.5mm	12.0	12.0	7.7			
RNB3.5-8	5/16	8.4mm	15.0	27.0	13.5			
RNB3.5-10	3/8	10.5mm	15.0	27.0	13.5			

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB5.5-4	#8	4.3mm	7.2	15.7	5.9	6.8	5.6	3.4
RNBL5.5-4	#8	4.3mm	9.5	19.8	8.3			
RNB5.5-6	1/4	6.5mm	12.0	25.8	13.0			
RNB5.5-8	5/16	8.4mm	15.0	28.0	13.7			
RNB5.5-10	3/8	10.5mm	15.0	28.0	13.7			
RNB5.5-12	1/2	13.0mm	19.2	32.4	16			

Electrical Accessories


Non-Insulated Ring Terminals



Conductor cross-section: 6-10mm²; American Wire Gauge: 8;
Maximum current: I_{max}=62A

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB8-4	#8	4.3mm	12.0	23.8	9.3	8.5	7.2	4.5
RNBS8-5	#10	5.3mm	8.8	23.8	11.1			
RNBM8-5	#10	5.3mm	12.0	23.8	9.3			
RNBL8-5	#10	5.3mm	15.0	29.8	13.8			
RNBS8-6	1/4	6.5mm	12.0	23.8	9.3			
RNBL8-6	1/4	6.5mm	15.0	29.8	13.8			
RNB8-8	5/16	8.4mm	15.0	29.8	13.8			
RNB8-10	3/8	10.5mm	15.0	29.8	13.8			

Conductor cross-section: 10-16mm²; American Wire Gauge: 6;
Maximum current: I_{max}=88A

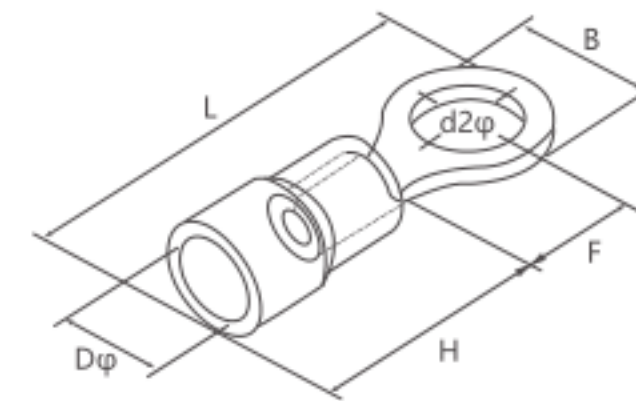

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB14-4	#8	4.3mm	12.0	29.8	13.3	10.5	9.0	5.8
RNB14-5	#10	5.3mm	12.0	29.8	13.3			
RNBS14-6	1/4	6.5mm	12.0	29.8	13.3			
RNBL14-6	1/4	6.5mm	16.0	32.8	13.3			
RNB14-8	5/16	8.4mm	16.0	32.8	14.5			
RNB14-10	3/8	10.5mm	16.0	32.8	14.5			
RNB14-12	1/2	13.0mm	22.0	41.0	19.5			

Conductor cross-section: 16-25mm²; American Wire Gauge: 4;
Maximum current: I_{max}=115A

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNBS22-5	#10	5.3mm	12.2	33.2	14.5	12.0	11.5	7.7
RNBL22-5	#10	5.3mm	16.5	33.7	13.5			
RNBS22-6	1/4	6.3mm	12.2	33.2	14.5			
RNBL22-6	1/4	6.3mm	16.5	33.7	13.5			
RNB22-8	5/16	8.4mm	16.5	33.7	13.5			
RNB22-10	3/8	10.5mm	16.5	33.7	13.5			
RNB22-11	7/16	11.5mm	22.0	42.5	19.5			
RNB22-12	1/2	13.0mm	22.0	42.5	19.5			

Conductor cross-section: 25-50mm²; American Wire Gauge: 4;
Maximum current: I_{max}=160A

Model	US-made bolt number	Size						
		Bolt hole diameter	B	L	F	H	DΦ	dΦ
		d2	mm	mm	mm	mm	mm	mm
RNB38-5	#10	5.3mm	15.3	39.0	18.3	14.0	13.5	9.4
RNB38-6	1/4	6.5mm	15.3	39.0	18.3			
RNBS38-8	5/16	8.4mm	15.3	39.0	18.3			
RNBL38-8	5/16	8.4mm	22.0	42.7	17.7			
RNBS38-10	3/8	10.5mm	15.3	39.0	8.3			
RNBL38-10	3/8	10.5mm	22.0	42.7	17.7			
RNB38-11	7/16	11.5mm	22.0	42.7	17.7			
RNB38-12	1/2	13.0mm	22.0	42.7	17.7			

Electrical Accessories


Insulated Spade Terminals

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A



Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV1.25-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.3	Red
SV1.25-3.5	#6	3.7mm	5.7	21.2	6.5			
SVM1.25-4	#8	4.3mm	7.2	21.2	6.5			
SVL1.25-4	#8	4.3mm	8.1	21.2	6.5			
SVS1.25-5	#10	5.3mm	8.1	21.2	6.5			
SVL1.25-5	#10	5.3mm	9.5	21.2	6.5			
SVS1.25-6	1/4	6.5mm	9.5	21.2	6.5			
SVL1.25-6	1/4	6.5mm	12.0	27.2	11.0			

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

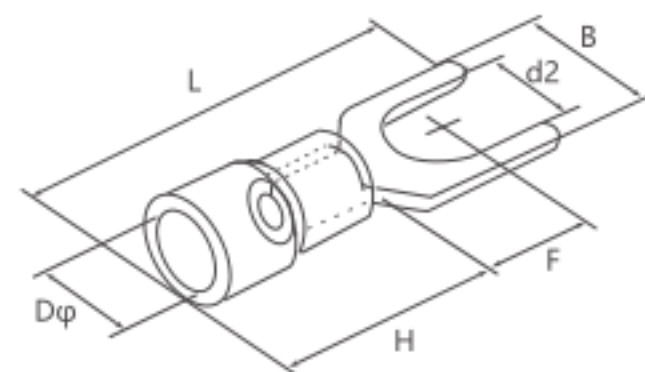

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV2-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.9	Blue
SVS2-3.5	#6	3.7mm	5.7	21.2	6.5			
SVS2-4	#8	4.3mm	6.4	21.2	6.5			
SVM2-4	#8	4.3mm	7.2	21.2	6.5			
SVL2-4	#8	4.3mm	8.1	21.2	6.5			
SVS2-5	#10	5.3mm	8.1	21.2	6.5			
SVL2-5	#10	5.3mm	9.5	21.2	6.5			
SVS2-6	1/4	6.5mm	9.5	21.2	6.5			
SVL2-6	1/4	6.5mm	12.0	27.2	11.0			

Conductor cross-section: 2.5-4mm²; American Wire Gauge: 14-12;
Maximum current: I_{max}=37A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV3.5-4	#8	4.3mm	8.0	24.8	7.0	12.5	6.2	Black
SV3.5-5	#10	5.3mm	8.0	24.8	7.0			
SV3.5-6	1/4	6.5mm	12.0	28.0	12.1			

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV5.5-3	#6	3.7mm	8.3	25.2	7.5	12.5	6.7	Yellow
SVS5.5-4	#8	4.3mm	8.3	25.2	7.5			
SVL5.5-4	#8	4.3mm	9.0	25.2	7.5			
SV5.5-5	#10	5.3mm	9.0	25.2	7.5			
SVS5.5-6	1/4	6.5mm	9.0	25.2	7.5			
SVL5.5-6	1/4	6.5mm	12.0	31.2	12.0			
SV5.5-8	5/16	8.4mm	14.0	30.0	11.5			

Electrical Accessories


Non-Insulated Spade Terminals

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=19A



Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SNB1.25-3	#4	3.2mm	5.7	16.0	6.5	4.8	3.4	1.7
SNBS1.25-3.5	#6	3.7mm	5.7	16.0	6.5			
SNBS1.25-4	#8	4.3mm	6.4	16.0	6.5			
SNBM1.25-4	#8	4.3mm	7.2	16.0	6.5			
SNBS1.25-5	#10	5.3mm	8.1	16.0	6.5			
SNBS1.25-6	1/4	6.5mm	9.5	16.0	6.5			

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

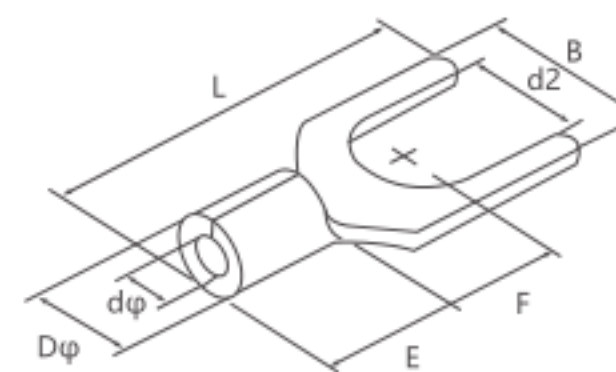

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SNB2-3	#4	3.2mm	5.7	16.0	6.5	4.8	4.1	2.3
SNBS2-3.5	#6	3.7mm	5.7	16.0	6.5			
SNB2-4	#8	4.3mm	6.4	16.0	6.5			
SNBM2-4	#8	4.3mm	7.2	16.0	6.5			
SNLS2-5	#10	5.3mm	9.5	16.0	6.5			
SNBS2-6	1/4	6.5mm	9.5	16.0	6.5			
SNBL2-8	1/4	6.5mm	12.0	22.0	11.0			

Conductor cross-section: 2.5-4mm²; American Wire Gauge: 14-12;
Maximum current: I_{max}=37A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SNB3.5-4	#8	4.3mm	8.0	18.3	7.0	6.0	5.0	3.0
SNB3.5-5	#10	5.3mm	8.0	18.3	7.0			
SNB3.5-6	1/4	6.5mm	12.0	21.5	12.1			

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SNBS5.5-4	#8	4.3mm	8.3	19.5	7.5	6.8	5.6	3.4
SNBS5.5-5	#10	5.3mm	9.0	19.5	7.7			
SNBS5.5-6	1/4	6.5mm	9.0	19.5	7.5			

Insulated Female/Male Connectors




Insulated Female Connectors

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-18;
Maximum current: I_{max}=19A; Material: Brass

Model	NEMA TAB	Material thickness	Size(mm)					Color
			B	dΦ	DΦ	L	H	
FDD1.25-110(5)	0.5*2.8	0.3	3.8	1.7	3.8	19.0	10.0	Red
FDD1.25-110(8)	0.8*2.8	0.3	3.8	1.7	3.8	19.0		
FDD1.25-187(5)	0.5*4.75	0.35	5.6	1.7	3.8	19.0		
FDD1.25-187(8)	0.8*4.75	0.35	5.6	1.7	3.8	19.0		
FDD1.25-250	0.8*6.35	0.4	7.4	1.7	3.8	21.0		

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=15A; Material: Brass

Model	NEMA TAB	Material thickness	Size(mm)					Color
			B	dΦ	DΦ	L	H	
FDD2-110(5)	0.5*2.8	0.3	3.8	2.3	4.3	19.0	10.0	Blue
FDD2-110(8)	0.8*2.8	0.3	3.8	2.3	4.3	19.0		
FDD2-187(5)	0.5*4.75	0.35	5.6	2.3	4.3	19.0		
FDD2-187(8)	0.8*4.75	0.35	5.6	2.3	4.3	19.0		
FDD2-250	0.8*6.35	0.4	7.4	2.3	4.3	21.0		

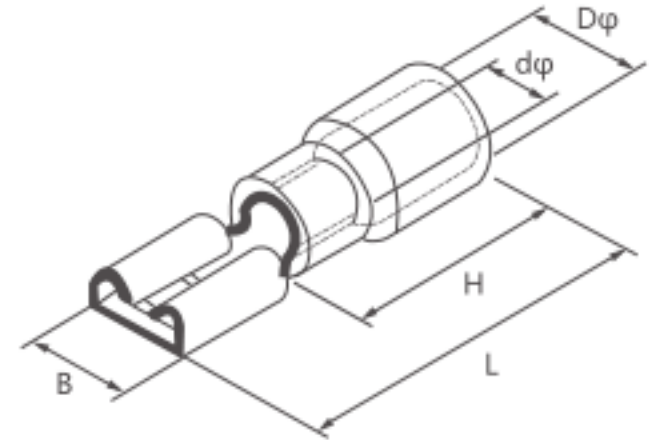

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=24A; Material: Brass

Model	NEMA TAB	Material thickness	Size(mm)					Color
			B	dΦ	DΦ	L	H	
FDD5-250	0.8-6.35	0.4	7.4	3.3	5.7	25.0	13.0	Yellow

Insulated Male Connectors


Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-18;
Maximum current: I_{max}=10A;

Model	NEMA TAB	Material thickness	Size(mm)					Color
			B	dΦ	DΦ	L	H	
MDD1.25-187	0.5*4.75	0.5	4.75	1.70	4.3	20.0	10.0	Red



Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-18;
Maximum current: I_{max}=15A;

Model	NEMA TAB	Material thickness	Size(mm)					Color
			B	dΦ	DΦ	L	H	
MDD2-187	0.5*4.75	0.5	4.75	2.3	4.3	20.0	10.0	Blue
MDD2-250	0.8*6.35	0.4*2	6.35	2.3	4.3	21.0		

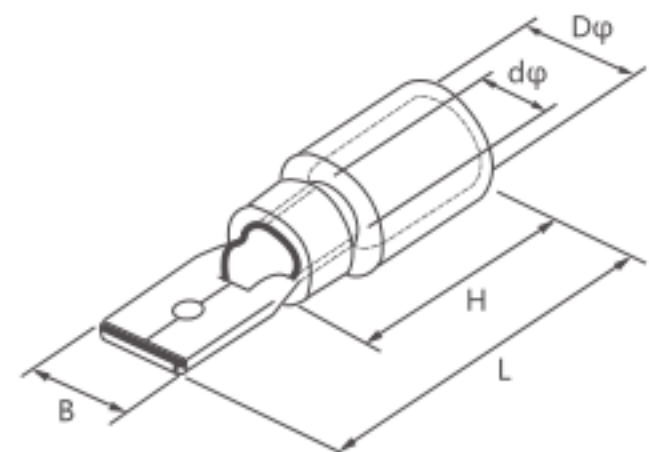

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=24A;

Model	NEMA TAB	Material thickness	Size(mm)					Color
			B	dΦ	DΦ	L	H	
MDD5.5-250	0.8*6.35	0.4*2	6.35	3.4	5.7	25.0	13.0	Yellow

Insulated Receptacle/Buttlet Disconnects




Insulated Receptacle Disconnects

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=10A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bΦ	BΦ	DΦ	F	L	
FRD1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	Red

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=15A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bΦ	BΦ	DΦ	F	L	
FRD2-156	0.4	4.0	6.3	2.3	14.0	24.5	Blue
FRD2-195	0.4	5.0	7.0	2.3	14.0	24.5	

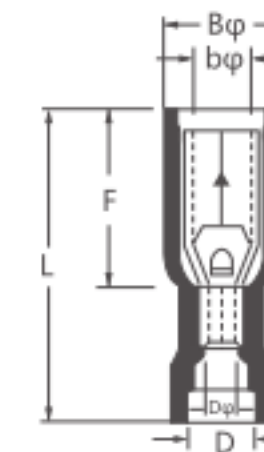

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=24A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bΦ	BΦ	DΦ	F	L	
FRD5.5-195	0.4	5.0	7.3	3.4	14.0	29.5	Yellow

Insulated Buttlet Disconnects


Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=10A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bΦ	F	DΦ	H	L	
MPD1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	Red



Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=15A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bΦ	F	DΦ	H	L	
MPD2-156	0.4	4.0	11.0	2.3	10.0	21.0	Blue
MPD2-195	0.4	5.0	11.0	2.3	10.0	21.0	

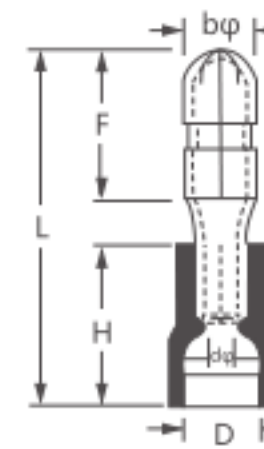

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=24A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bΦ	F	DΦ	H	L	
MPD5.5-195	0.4	5.0	12.0	3.4	13.0	25.0	Yellow

Electrical Accessories


Insulated Butt Connectors & Insulated Butted Disconnects



Insulated Butt Connectors

Material: Copper; Insulation Materials: PVC

Model	conductor cross-section		Size(mm)			Maximum current	Color
	A.W.G	mm ²	B	dΦ	L		
BV1.5	22-16	0.5-1.5	15.0	1.7	26.0	19A	Red
BV2	16-14	0.5-1.5	15.0	2.3	26.0	27A	Blue
BV5.5	12-10	4-6	15.0	3.4	26.0	48A	Yellow
BV8	#8	6-10	21.0	4.5	32.0	62A	Red
BV14	#6	10-16	26.0	5.8	42.0	88A	Blue
BV22	#4	16-25	29.0	7.7	50.0	115A	Yellow

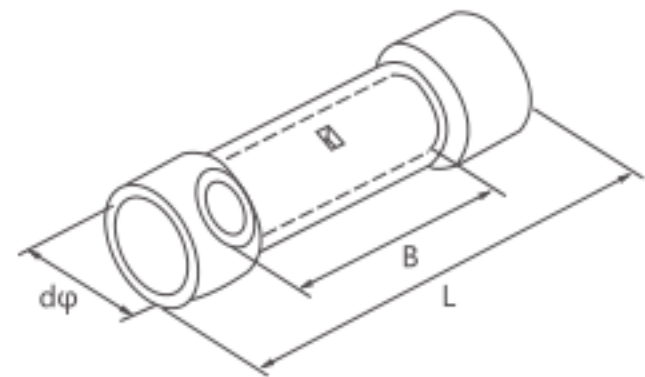

Insulated Butt Connectors


Material: Copper; Insulation Materials: PVC

Model	conductor cross-section		Size(mm)			Maximum current	Color
	A.W.G	mm ²	B	dΦ	L		
PVT1.25	22-16	0.5-1.5	8.0	1.7	16.0	19A	Red
PVT2	16-14	1.5-2.5	8.0	2.3	16.0	27A	Blue
PVT5.5	12-10	4-6	8.5	3.4	20.5	48A	Yellow

Insulated Butted Disconnects


Maximum current: 26-22 A.W.G: 9A; 16-14 A.W.G: 27A; 12-10 A.W.G: 48A; Maximum pressure voltage: 105°C 600V; Insulating sleeve material: Nylon

Model	Size(mm)			Connector material	Conductor cross-section	Color
	L	DΦ	dΦ			
BNYF0.5	20.0	2.0	1.3	Copper tube	26-22 A.W.G 0.2-0.5mm ²	Yellow
BNYF1.25	27.3	3.2	1.7	Copper tube	22-16 A.W.G 0.5-1.5mm ²	Red
BNYF2	27.3	3.8	2.3	Copper tube	16-14 A.W.G 1.5-2.5mm ²	Blue
BNYF5.5	27.3	5.3	3.4	Copper tube	14-10 A.W.G 4-6mm ²	Yellow

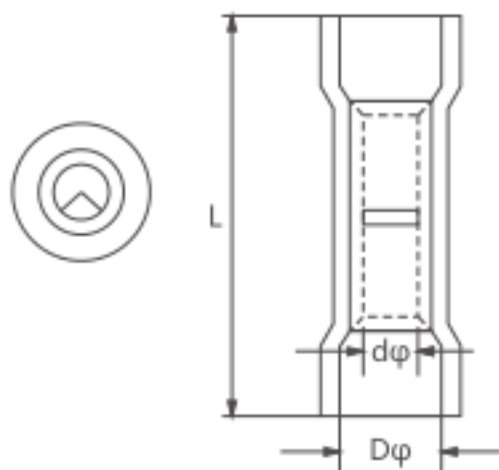

Electrical Accessories

Fully Vinyl Insulated Disconnects & Insulated Piggy Back Disconnects

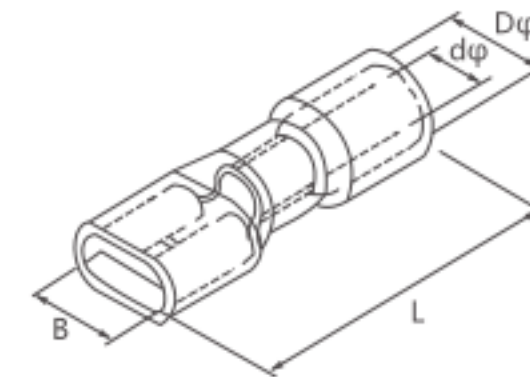

Fully Vinyl Insulated Disconnects

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16; Maximum current: I_{max}=15A; Material: Brass

Model	NEMA TAB	Size(mm)			
		B	DΦ	dΦ	L
FDFD1.25-187(5)	0.5*4.75	5.6	3.8	1.7	20.0
FDFD1.25-187(8)	0.8*4.75	5.6	3.8	1.7	20.0
FDFD1.25-250	0.8*6.35	7.4	3.8	1.7	21.5

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14; Maximum current: I_{max}=15A; Material: Brass

Model	NEMA TAB	Size(mm)			
		B	DΦ	dΦ	L
FDFD2-187(5)	0.5*4.75	5.6	4.3	2.3	20.0
FDFD2-187(8)	0.8*4.75	5.6	4.3	2.3	20.0
FDFD2-250	0.8*6.35	7.4	4.3	2.3	21.5

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10; Maximum current: I_{max}=24A; Material: Brass

Model	NEMA TAB	Size(mm)			
		B	DΦ	dΦ	L
FDFD5-250	0.8*6.35	7.4	5.7	3.4	25.0

Insulated Piggy Back Disconnects

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16; Maximum current: I_{max}=10A; Material: Brass



Model	NEMA TAB	Size(mm)					
		B	B1	H	DΦ	dΦ	L
PBDD1.25-250	0.8*6.35	7.4	6.35	10.0	3.8	1.7	21.5

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14; Maximum current: I_{max}=15A; Material: Brass

Model	NEMA TAB	Size(mm)					
		B	B1	H	DΦ	dΦ	L
PBDD2-250	0.8*6.35	7.4	6.3	10.0	4.3	2.3	21.5

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10; Maximum current: I_{max}=24A; Material: Brass

Model	NEMA TAB	Size(mm)					
		B	B1	H	DΦ	dΦ	L
PBDD5-250	0.8*6.35	7.4	6.35	13.0	5.7	3.4	25.0

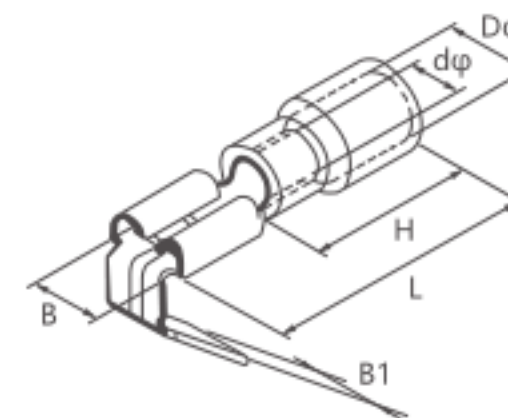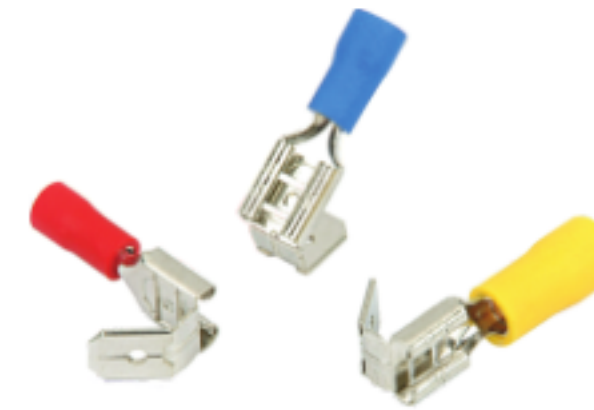


Insulated/Non-insulated Pin Terminals



Insulated Pin Terminals

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=19A

Model	Size(mm)				Color
	F	L	H	DΦ	
PTV1.25-9	1.9	19.0	10.0	4.3	Red
PTV1.25-10	1.9	20.0			
PTV1.25-12	1.9	22.0			
PTV1.25-13	1.9	23.0			
PTV1.25-18	1.9	28.0			

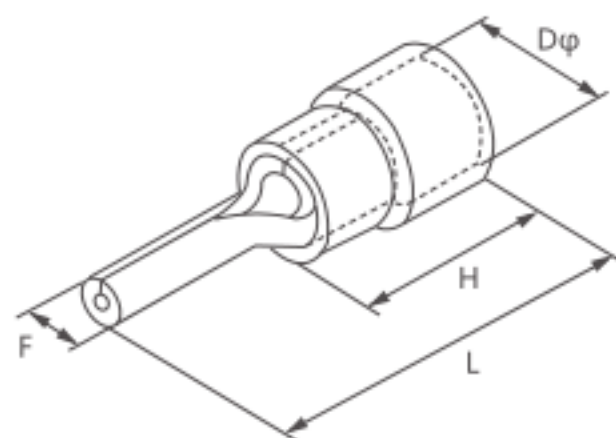

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

Model	Size(mm)				Color
	F	L	H	DΦ	
PTV2-9	1.9	19.0	10.0	4.9	Blue
PTV2-10	1.9	20.0			
PTV2-12	1.9	22.0			
PTV2-13	1.9	23.0			
PTV2-18	1.9	28.0			


Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A

Model	Size(mm)				Color
	F	L	H	DΦ	
PTV5.5-13	2.8	25.5	12.5	6.7	Yellow

Non-insulated Pin Terminals

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=19A

Model	Size(mm)				dΦ
	F	L	E	DΦ	
PTN1.25-9	1.9	13.8	4.8	3.4	1.7
PTN1.25-10	1.9	14.8			
PTN1.25-12	1.9	16.8			
PTN1.25-13	1.9	17.8			
PTN1.25-18	1.9	22.8			

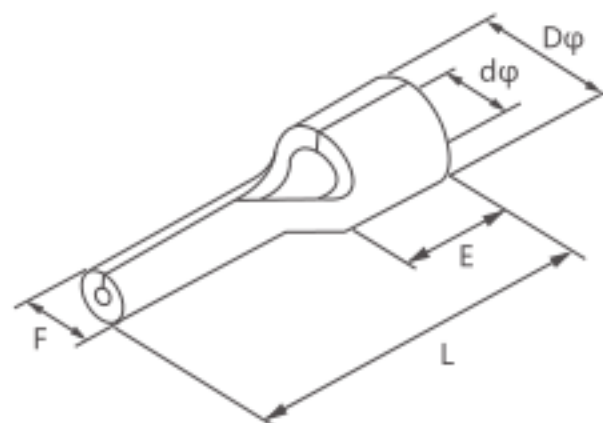

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

Model	Size(mm)				dΦ
	F	L	E	DΦ	
PTN2-9	1.9	13.8	4.8	4.1	2.3
PTN2-10	1.9	14.8			
PTN2-12	1.9	16.8			
PTN2-13	1.9	17.8			
PTN2-18	1.9	22.8			

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=27A

Model	Size(mm)				dΦ
	F	L	E	DΦ	
PTN5.5-13	2.8	19.8	6.8	5.6	3.4


Insulated Blade Terminals & Insulated Lipped Blade Terminals



Insulated Blade Terminals

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=19A; Material: Copper; Material thickness: 0.75mm

Model	Size(mm)					Color
	B	L	F	H	DΦ	
DBV1.25-10	2.3	20.0	10.0	10.0	4.3	Red
DBV1.25-14	3.0	24.0	14.0			
DBV1.25-18	2.3	28.0	18.0			

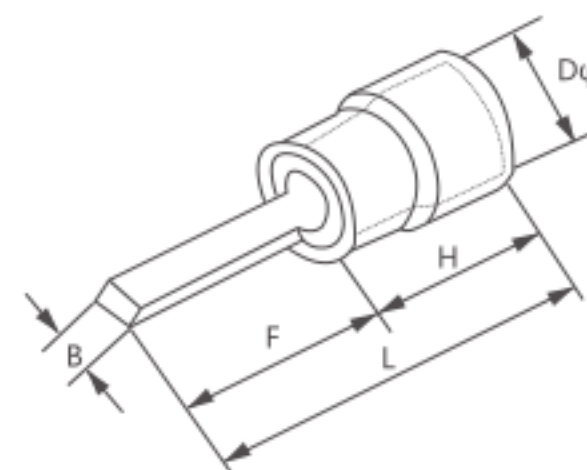

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A; Material: Copper; Material thickness: 0.8mm

Model	Size(mm)					Color
	B	L	F	H	DΦ	
DBV2-10	2.4	19.0	9.0	10.0	4.9	Blue
DBV2-14	2.4	24.0	14.0			
DBV2-18	2.4	28.0	18.0			

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A; Material: Copper; Material thickness: 1.0mm

Model	Size(mm)					Color
	B	L	F	H	DΦ	
DBV5.5-10	2.8	22.5	10.0	13.0	5.6	Yellow
DBV5.5-14	4.5	26.5	14.0			
DBV5.5-18	4.5	30.5	18.0			

Electrical Accessories

Fully Vinyl Insulated Disconnectors & Insulated Piggy Back Disconnectors




The limit of working temperature: 105 Ui=300V; Tip material: Copper tube

Model	Size							Conductor cross-section mm ²	Insulating sleeve color (above)used by Germany (below)used by France
	F	L	W	dΦ	DΦ	CΦ	A.W.G		
E0506	6.0	12.0	12.0	2.6	1.3	1.0	#22	0.5	Orange White
E0508	8.0	14.0	14.0						
E0510	10.0	16.0	16.0						
E7506	6.0	12.4	12.4	2.8	1.5	1.2	#20	0.75	White Blue
E7508	8.0	14.6	14.6						
E7510	10.0	16.4	16.4						
E7512	12.0	18.4	18.4	3.0	1.7	1.4	#18	1.0	Yellow Red
E1006	6.0	12.4	12.4						
E1008	8.0	14.6	14.6						
E1010	10.0	16.4	16.4	3.5	2.0	1.7	#16	1.5	Red Black
E1012	12.0	18.4	18.4						
E1508	8.0	14.6	14.6						
E1510	10.0	16.4	16.4	4.0	2.6	2.3	#14	2.5	Blue Gray
E1518	18.0	24.4	24.4						
E2508	8.0	15.2	15.2						
E2512	12.0	19.0	19.0	4.4	3.2	2.8	#12	4.0	Gray Orange
E2518	18.0	25.0	25.0						
E4009	9.0	16.5	16.5						
E4012	12.0	19.5	19.5	6.3	3.9	3.5	#10	6.0	Black Green
E4018	18.0	25.5	25.5						
E6012	12.0	20.0	20.0						
E6018	18.0	26.0	26.0	7.6	4.9	4.5	#7	10.0	Milky Brown
E10-12	12.0	21.5	21.5						
E10-18	18.0	27.5	27.5						
E16-12	12.0	22.2	22.2	8.8	6.2	5.8	#5	16.0	Green Milky
E16-18	18.0	28.2	28.2						
E25-16	16.0	29.0	29.0						
E25-22	22.0	35.0	35.0	11.2	7.9	7.5	#4	25.0	Brown Black
E35-16	16.0	30.0	30.0						
E35-25	25.0	39.0	39.0						
E50-20	20.0	36.0	36.0	15.3	10.9	10.3	#1	50.0	Olive
E50-25	25.0	41.0	41.0						

Electrical Accessories


Non-Insulated Cord End Terminals & Non-Insulated Cord End Twin Terminals

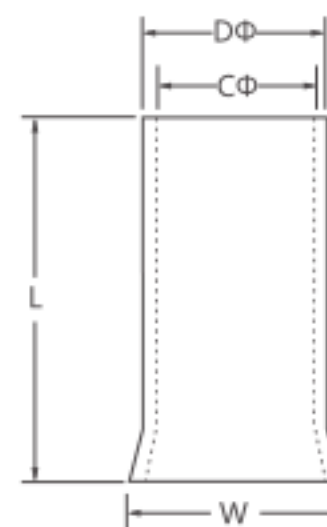

Non-Insulated Cord End Terminals

The limit of working temperature: 105 Ui=300V; Tip material: Copper tube

Model	conductor cross-section		Size(mm)			
	A.W.G	mm ²	L	D	C	W
En0506	#22	0.5	6.0	1.3	1.0	2.1
EN1006	#18	1.0	6.0	1.7	1.4	2.7
EN1010	#18	1.0	10.0	1.7	1.4	2.7
EN1510	#16	1.5	10.0	2.0	1.7	3.5
EN2507	#14	2.5	7.0	2.5	2.2	2.5
EN2512	#14	2.5	12.0	2.5	2.2	2.5
EN4009	#12	4.0	9.0	3.2	2.8	4.0
EN4012	#12	4.0	12.0	3.2	2.8	4.0
EN6010	#10	6.0	10.0	3.9	3.5	4.8
EN6012	#10	6.0	12.0	3.9	3.5	4.8
EN6015	#10	6.0	15.0	3.9	3.5	4.8
EN10-12	#7	10.0	12.0	4.9	4.5	5.8
EN10-15	#7	10.0	15.0	4.9	4.5	5.8
EN10-15	#7	10.0	18.0	4.9	4.5	5.8
EN16-12	#5	16.0	12.0	6.2	5.8	7.5
EN16-15	#5	16.0	15.0	6.2	5.8	7.5
EN16-18	#5	16.0	18.0	6.2	5.8	7.5
EN25-16	#4	25.0	16.0	7.9	7.5	9.2
EN25-22	#4	25.0	22.0	7.9	7.5	9.2
EN35-16	#2	35.0	16.0	8.7	8.3	10
EN35-25	#2	35.0	25.0	8.7	8.3	10
EN50-20	#1	50.0	20.0	10.9	10.3	12.4

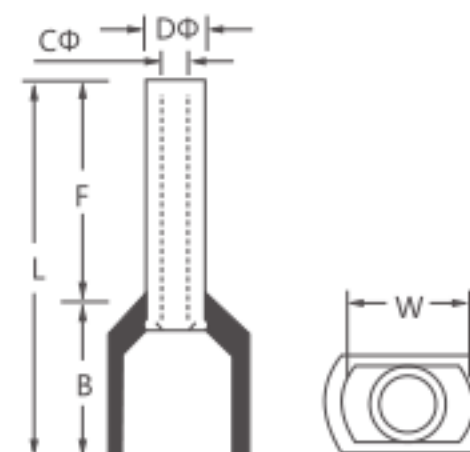


Non-Insulated Cord End Twin Terminals

The limit of working temperature: 105 Ui=300V; Tip material: Copper tube

Model	NEMA TAB	Size(mm)						Color	
		F	L	W	B	DΦ	CΦ	Germany	France
Te0508	2*0.5	8	14.5	8	6.5	1.8	1.5	White	White
TE7508	2*0.75	8	14.7	8	6.7	2.1	1.8	Blue	Gray
TE7510	2*0.75	10	16.7	10	6.7	2.1	1.8	Blue	Gray
TE1008	2*1.0	8	15.1	8	7.1	2.3	2.0	Red	Red
TE1010	2*1.0	10	17.1	10	7.1	2.3	2.0	Red	Red
TE1508	2*1.5	8	15.5	8	7.2	2.6	2.3	Black	Yellow
TE1512	2*1.5	12	19.5	12	7.5	2.6	2.3	Black	Yellow
TE2510	2*2.5	10	18.5	10	8.5	3.3	2.9	Gray	Blue
TE2512	2*2.5	13	21.5	13	8.5	3.3	2.9	Gray	Blue
TE4012	2*4.0	12	23.1	12	11.1	4.2	3.8	Orange	Gray
TE6014	2*6.0	14	26.1	14	12.1	5.3	4.9	Green	Yellow
TE10-14	2*10.0	14	26.6	14	12.0	6.9	6.5	Brown	Red
TE16-14	2*16.0	14	31.3	8.9	17.3	8.7	8.3	Milky	Blue

Electrical Accessories
Terminal Connector

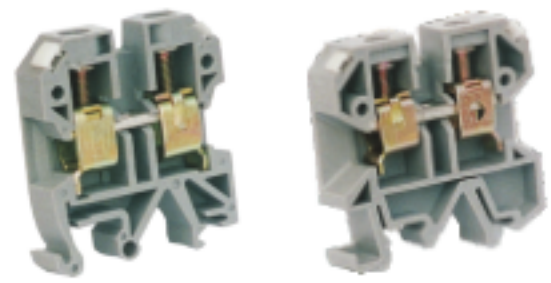

JXB Series Terminal Connector


Type	Hard wire (mm ²)	Soft wire (mm ²)	Soft wire with tube terminal (mm)	Rated current (A)	Rated voltage (V)	Dimension (mm)
JXB-2.5/35	0.5-6	1.5-4	0.5-2.5	24	800	6×40×38.5
JXB-4/35	0.5-6	1.5-4	0.5-4	32	800	65×42×52
JXB-6/35	0.5-10	1.5-10	0.5-6	41	800	8×42×52
JXB-10/35	1.5-16	1.5-16	0.5-10	57	800	10×42×52
JXB-16/35	2.5-16	2.5-16	4-16	76	800	12×42×52
JXB-35/35	6-35	10-35	10-35	125	800	18×50×63.5
JXB-70/35	10-70	10-70	10-70	192	800	22×75×87




EK Series Terminal Connector

Type	Hard wire (mm ²)	Soft wire (mm ²)	Soft wire with tube terminal (mm)	Dimension (mm)
EK-2.5/35	0.5-14	1.5-2.5	0.5-2.5	6×57×37
EK-4/35	0.5-6	1.5-4	0.5-4	8×57×41
EK-6/35	0.5-10	1.5-6	0.5-6	12×57×48
EK-10/35	0.5-16	1.5-10	0.5-10	10×57×48
EK-16/35	2.5-16	2.5-16	4-16	12×57×48

UK Series Terminal Connector

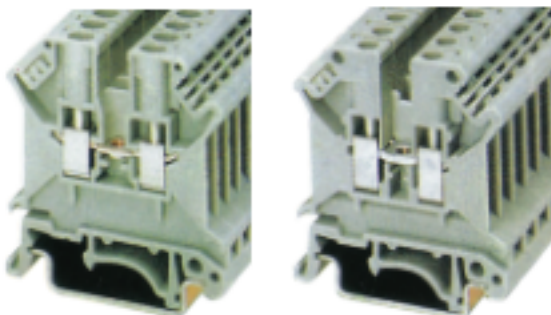


Type	Hard wire (mm ²)	Soft wire (mm ²)	Rated current (A)	Rated voltage (V)	Dimension (mm)
UK-1.5N	0.14-1.5	0.14-1.5	17.5	660	4.2×42.5×40.5
UK-2.5B	1.0-4	1.0-2.5	32	800	6.2×42.5×42
UK-3N	0.2-6	0.2-4	32	800	5.2×42.5×47
UK-5N	0.2-6	0.2-4	41	800	6.2×42.5×47
UK-6N	0.5-10	0.5-6	57	800	8.2×42×47
UK-10N	0.5-16	1.5-10	76	800	10.2×42.5×47
UK-16N	2.5-25	4-16	101	800	12.2×42.5×54
UK-35N	0.75-50	0.75-35	125	1000	15.2×50.5×61
UKH-50	16-50	25-50	150	1000	20×70.5×83.5
UKH-95	25-95	35-95	232	1000	25×83.2×97.5
UKH-150	35-150	50-150	309	1000	32×100×118
UKH-240	70-240	70-240	415	1000	36×100×131.5

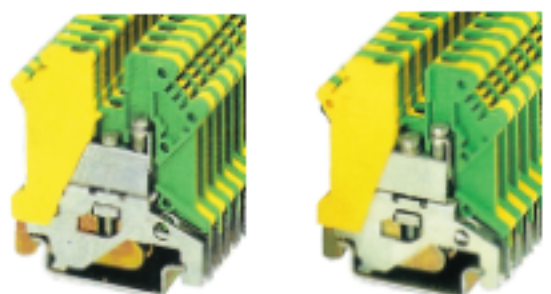

USLKG Series Terminal Connector


Type	Hard wire (mm ²)	Soft wire (mm ²)	Rated current (A)	Rated voltage (V)	Dimension (mm)
USLKG1.5N	0.14-1.5	0.14-1.5	12	660	6.2×42.5×47
USLKG2.5	0.2-4	0.2-2.5	32	800	6.2×42.5×47
USLKG3	0.25-2.5	0.25-1.5	32	800	5.2×42.5×47
USLKG5	0.25-4	0.25-2.5	41	800	6.2×42.5×47
USLKG6N	0.25-6	0.25-6	57	800	8.2×42.5×47
USLKG10N	0.5-16	0.5-10	76	800	10.2×42.5×47
USLKG16N	2.5-25	4-16	101		12.2×42.5×54
USLKG35	0.75-50	0.75-35	150		15.2×50.5×62
USLKG50	16-50	25-50	150		20×70.5×81.5

Electrical Accessories
Terminal Connector

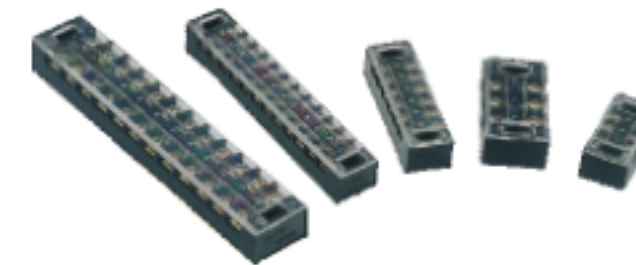


TB Series Terminal Connector

Type	Current (A)	No. of poles	Dimensions						
			L	L1	A	B	C	D	E
TB-1503	15	3	46	36.5	7.5	9	M3	22	17
TB-1504	15	4	55	45.5	7.5	9	M3	22	17
TB-1506	15	6	73	63.5	7.5	9	M3	22	17
TB-1512	15	12	127	118	7.5	9	M3	22	17
TB-2503	25	3	50	40	10.5	12	M4	30	20
TB-2504	25	4	62.5	57	10.5	12	M4	30	20
TB-2506	25	6	91	81.5	10.5	12	M4	30	20
TB-2512	25	12	163	153	10.5	12	M4	30	20
TB-3503	35	3	50	40	10.5	12	M4	30	20
TB-3504	35	4	62.5	57	10.5	12	M4	30	20
TB-3506	35	6	91	81.5	10.5	12	M4	30	20
TB-3512	35	12	163	153	10.5	12	M4	30	20
TB-4503	45	3	70	60.5	15	17	M5	38	23.5
TB-4504	45	4	86	75.5	15	17	M5	38	23.5
TB-4506	45	6	120.5	110	15	17	M5	38	23.5
TB-6003	60	3	70.5	65.5	15.5	18	M6	38	31
TB-6004	60	4	93.5	82.5	15.5	18	M6	38	31
TB-6006	60	6	129	118	15.5	18	M6	38	31
TB-1003	100	3	86.5	75.5	22	20	M6	43.5	35
TB-1004	100	4	108	96	22	20	M6	43.5	35
TB-1006	100	6	153	140	22	20	M6	43.5	35

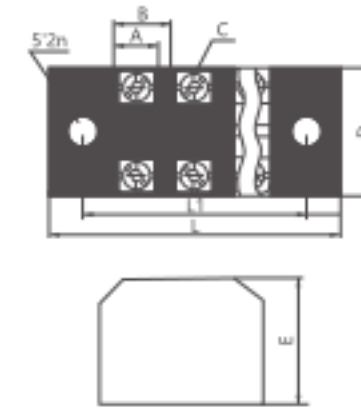

TC Series Terminal Connector


Type	Current (A)	No. of poles	Dimensions								
			L	L1	A	B	C	D	E	F	G
TC-603	60	3	28.5	86.5	38	42.7	25.5	31	15	17	M6
TC-604	60	4	28.5	115	38	42.7	25.5	31	15	17	M6
TC-1003	100	3	34.5	113.5	46.5	55.2	28	36.3	17.3	22.5	M6
TC-1004	100	4	34.5	137.5	46.5	55.2	28	36.3	17.3	22.5	M6
TC-1503	150	3	38.5	115	57.2	67	30.5	40	19.8	25.3	M8
TC-1504	150	4	38.5	153	57.2	67	30.5	40	19.8	25.3	M8
TC-2003	200	3	44.5	133	63	72.1	34	44.4	23	28.3	M8
TC-2004	200	4	44.5	177	63	72.1	34	44.4	23	28.3	M8
TC-3003	300	3	55	164	78	89.4	47.5	50.6	27	30	M10
TC-3004	300	4	55	218	78	89.4	47.5	50.6	27	30	M10
TC-4003	400	3	55	164	78	89.4	47.5	50.6	27	36	M10
TC-4004	400	4	55	218	78	89.4	47.5	50.6	27	36	M10

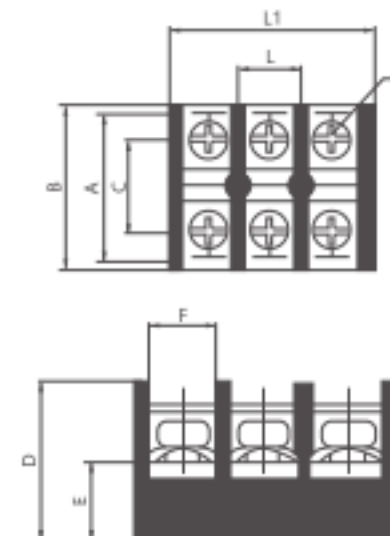

Cooling Fan



Size:80mm×80mm×25mm
 Airflow:24~39³/hr 14~23CFM
 Weight:208g
 Noise:22~30dBA
 Operation Temperature:-10°C~+65°C

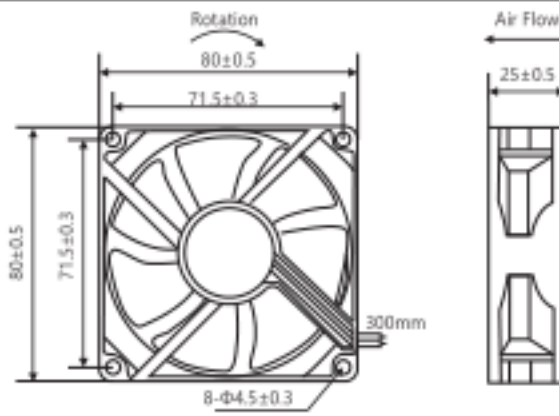


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC8025-1	Sleeve	110	50/60	0.13	13	2300/2600	27/30	32/39	19/23
YC8025-2		220		0.07					
YC8025-3	Ball	110		0.13					
YC8025-4		220		0.07					



Size:92mm×92mm×25mm
 Airflow:37~58³/hr 22~34CFM
 Weight:268g
 Noise:28~40dBA
 Operation Temperature:-10°C~+65°C

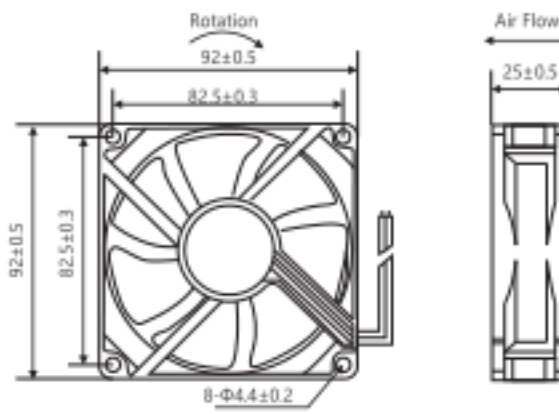


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC9225-1	Sleeve	110	50/60	0.14	13	2300/2600	34/40	47/58	28/34
YC9225-2		220		0.07					
YC9225-3	Ball	110		0.14					
YC9225-4		220		0.07					



Size:110mm×110mm×25mm
 Airflow:70~100m³/hr 41~59CFM
 Weight:304g
 Noise:30~41dBA
 Operation Temperature:-10°C~+65°C

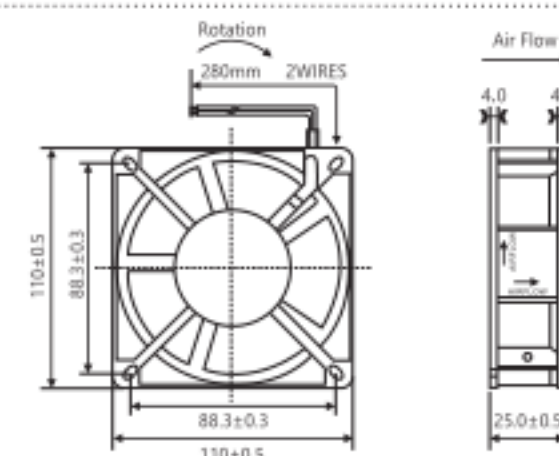


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC11025-1	Sleeve	110	50/60	0.20	18	2300/2600	35/41	35/41	49/59
YC11025-2		220		0.10					
YC11025-3	Ball	110		0.20					
YC11025-4		220		0.10					

Cooling Fan



Size:120mm×120mm×25mm
 Airflow:76~112m³/hr 45~66CFM
 Weight:314g
 Noise:31~42dBA
 Operation Temperature:-10°C~+65°C

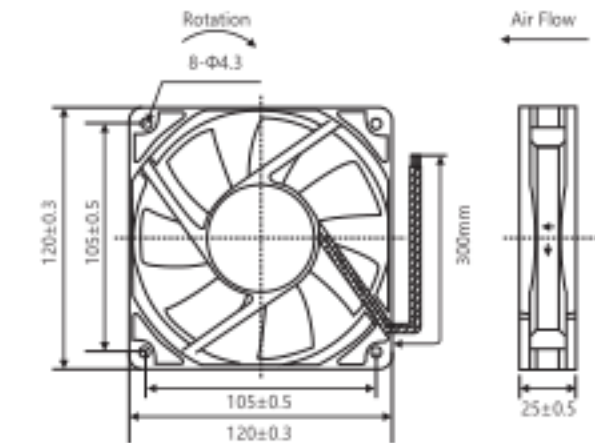


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC12025-1	Sleeve	110	50/60	0.20	18	2300/2600	39/42	96/112	57/66
YC12025-2		220		0.10					
YC12025-3	Ball	110		0.20					
YC12025-4		220		0.10					



Size:120mm×120mm×38mm
 Airflow:134~204m³/hr 79~120CFM
 Weight:600g
 Noise:39~50dBA
 Operation Temperature:-10°C~+105°C

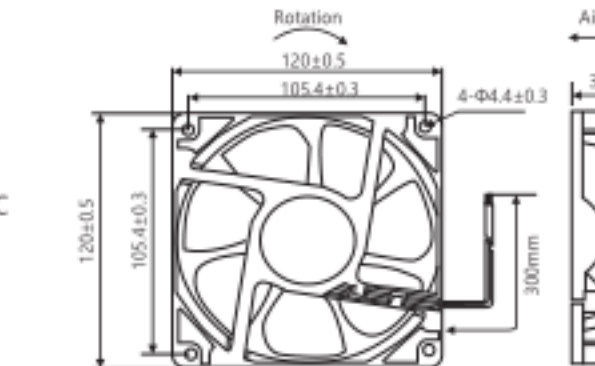

Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC12038-1	Sleeve	110	50/60	0.25	24	2300/2600	45/50	180/204	106/120
YC12038-2		220		0.14	22				
YC12038-3		380		0.09	22				
YC12038-4	Ball	110		0.25	24				
YC12038-5		220		0.14	22				
YC12038-6		380		0.09	22				




Electrical Accessories

Cooling Fan



Size:135mm×135mm×32mm
 Airflow:156~197m³/hr 92~115CFM
 Weight:595g
 Noise:44~50dBA
 Operation Temperature:-10°C~+65°C

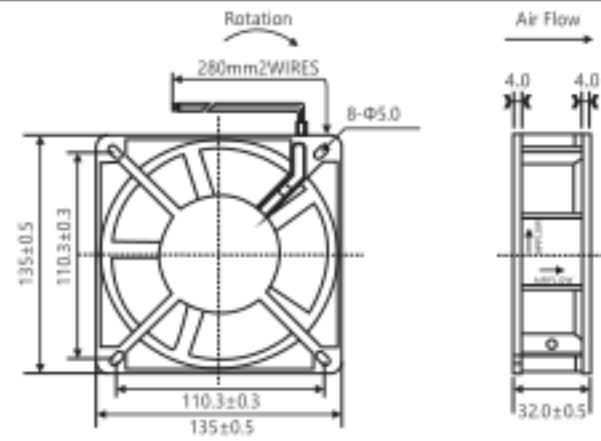


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC125FZY1-S	Sleeve	110	50/60	0.34	25	2400/2800	44/50	156/197	92/115
YC125FZY2-S		220		0.17					
YC125FZY3-S		380		0.10					



Size:135mm×135mm×38mm
 Airflow:141~205m³/hr 83~122CFM
 Weight:555g
 Noise:41~53dBA
 Operation Temperature:-10°C~+105°C

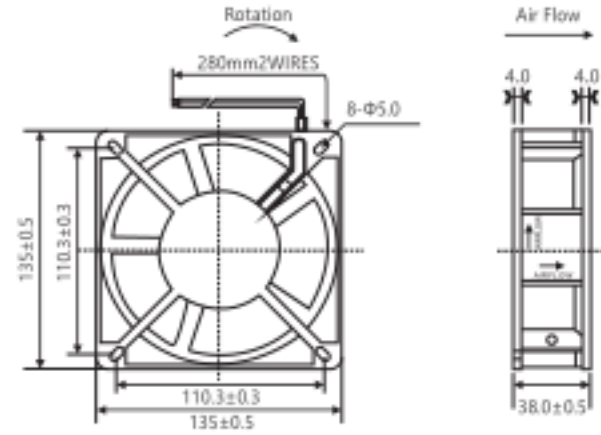


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC13538-1	Sleeve	220	50/60	0.18	25	2400/2800	46/53	165/205	92/122
YC13538-2		380		0.11					
YC13538-3	Ball	220		0.18					



Size:172mm×150mm×39mm
 Airflow:330~375m³/hr 194~220CFM
 Weight:655g
 Noise:56~60dBA
 Operation Temperature:-10°C~+70°C

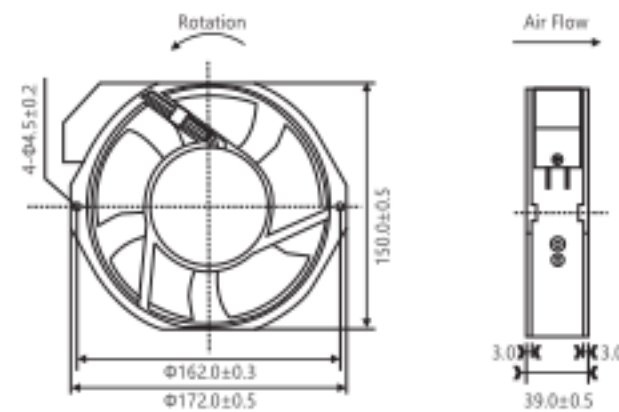

Technical Parameter


Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume		Capacitor
								m ³ /hr	CFM	
YC145FZY1-S	Ball	110	50/60	0.36	30	2400/2800	56	330/375	194/220	3.3uf/250v
YC145FZY2-S		220		0.18						1.0uf/500v
YC145FZY3-S		380		0.10						0.47uf/630v

Electrical Accessories

Cooling Fan



Size:150mm×150mm×50mm
 Airflow:373~501m³/hr 220~295CFM
 Weight:1200g
 Noise:50~59dBA
 Operation Temperature:-10°C~+65°C

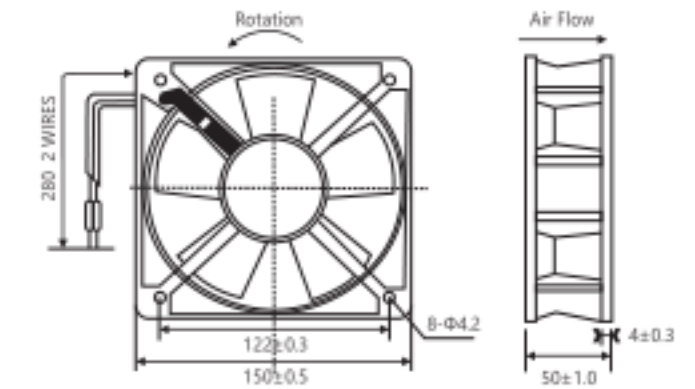


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC15050-1	Sleeve	110	50/60	0.40	38	2300/2600	54/59	299/336	176/198
YC15050-2		220		0.22					
YC15050-3		380		0.12					
YC15050-4	Ball	220	380	0.22	38	2300/2600	49/54	299/336	176/198
YC15050-5		380		0.12					



Size:172mm×150mm×50mm
 Airflow:330~375m³/hr 194~220CFM
 Weight:655g
 Noise:56~60dBA
 Operation Temperature:-10°C~+70°C

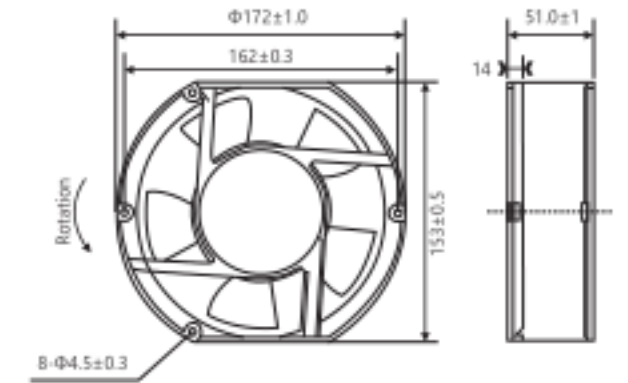


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC17251-1	Sleeve	110	50/60	0.40	38	2300/2600	54/59	299/336	176/198
YC17251-2		220		0.22					
YC17251-3		380		0.12					
YC17251-4	Ball	220	380	0.22	38	2300/2600	49/54	299/336	176/198
YC17251-5		380		0.12					


H

H

Cooling Fan



Size:172mm×172mm×50mm
 Airflow:373~501m³/hr 200~295CFM
 Weight:1200g
 Noise:50~59dBA
 Operation Temperature:-10°C~+65°C

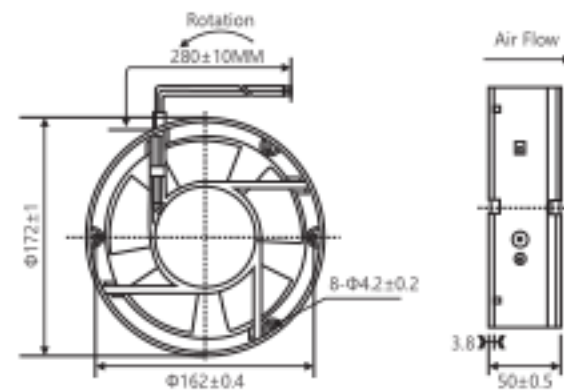


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC17252-1	Sleeve	110	50/60	0.40	38	2300/2600	54/59	299/336	176/198
YC17252-2		220		0.22					
YC17252-3		380		0.12					
YC17252-4	Ball	220		0.22					
YC17252-5		380		0.12					



Size:180mm×180mm×60mm
 Airflow:86~671m³/hr 345~395CFM
 Weight:1200g
 Noise:50~59dBA
 Operation Temperature:-10°C~+65°C

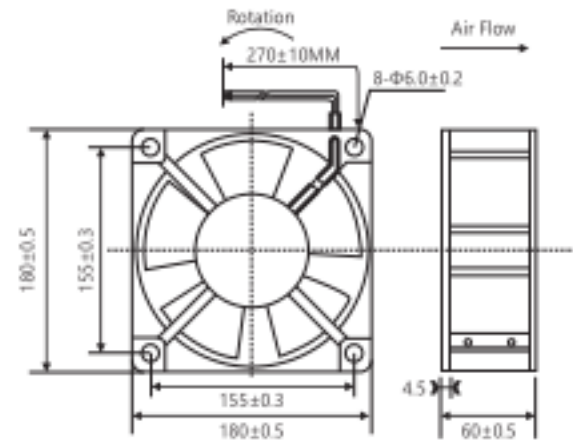


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC18060-1	Ball	220	50/60	0.23	55	2400/2700	63/68	586/671	345/395
YC18060-2		380		0.13					



Size:200mm×200mm×60mm
 Airflow:660~760m³/hr 388~447CFM
 Weight:1600g
 Noise:63~68dBA
 Operation Temperature:-10°C~+65°C

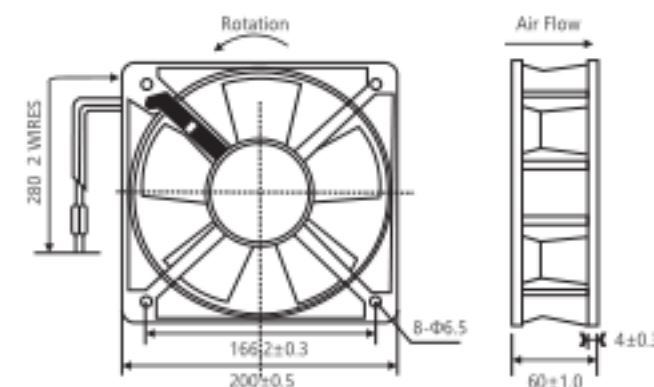


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC20060-1	Ball	220	50/60	0.48	65	2600	70	586/671	345/395
YC20060-2		380		0.30					

Cooling Fan



Size:220mm×220mm×60mm
 Airflow:612~7901m³/hr 360~465CFM
 Weight:1600g
 Noise:56~68dBA
 Operation Temperature:-10°C~+65°C

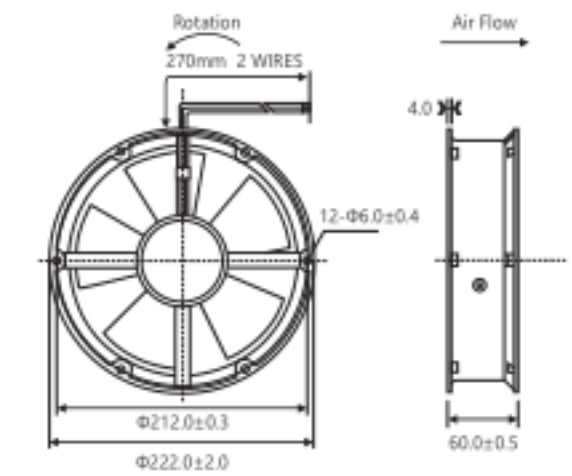


Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume	
								m ³ /hr	CFM
YC22060-1	Ball	220	50/60	0.48	65	2600	70	586/671	345/395
YC22060-2		380		0.30					



Size:225mm×225mm×80mm
 Airflow:612~7901m³/hr 360~465CFM
 Weight:2200g
 Noise:56~68dBA
 Operation Temperature:-10°C~+105°C

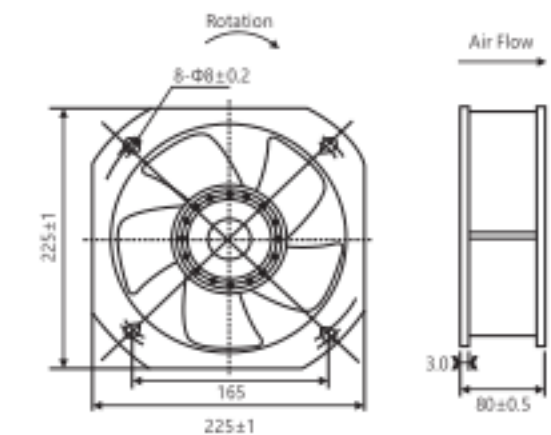

Technical Parameter

Type	Bearing form	Voltage (VAC)	Frequency (Hz)	Current (AMP)	Power (Watts)	Speed (RPM)	Noise (dBA)	air volume		Phases	Capacitor
								m ³ /hr	CFM		
YC200FZY1-S	Ball	220	50/60	0.42	85	2500/2850	63/66	1050/1290	618/760	1	2uf/500v
YC200FZY2-S		380		0.28						3	/
YC200FZY3-S		380		0.32						1	1.5uf/630v



Electrical Accessories

PG Nylon Cable Gland




1. Thread spec.: PG
2. Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of Nitrile butadiene rubber(NBR).
3. Working temperature: -40°C to 100°C in static state, instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, instantaneous heat resistance up to 100 °C.
4. Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

Color selected



Structural Drawing

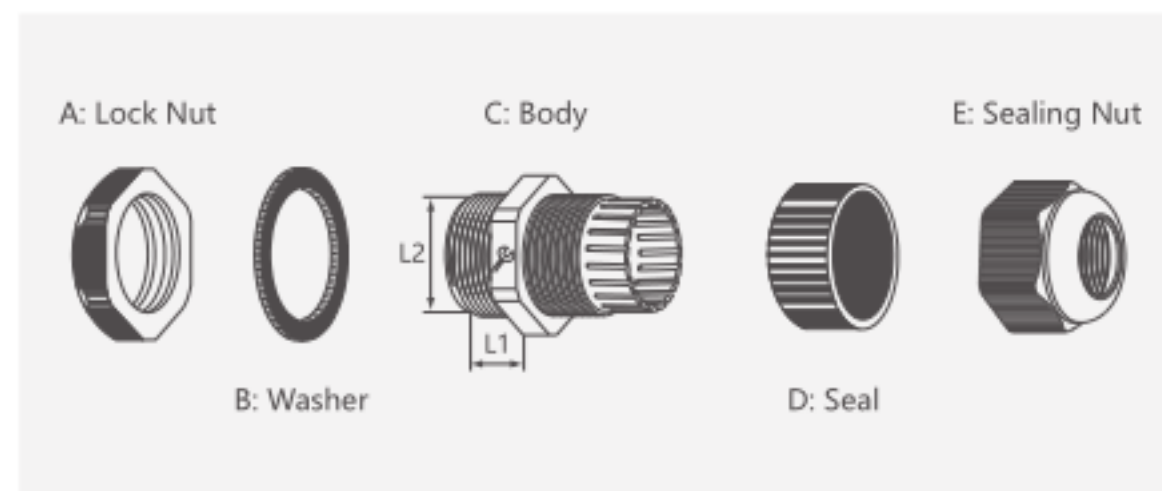

Technical Parameters

Model	Thread size	Cable range (mm)	Thread O.D. L2(mm)	Thread length L1(mm)	Spanner size A & E(mm)
PG7	PG7	3~6.5	12.5	9	18/16
PG9	PG9	4~8	15.2	9	22/19
PG11	PG11	5~10	18.6	9	24/22
PG13.5	PG13.5	6~11	20.4	10	27/24
PG16	PG16	10~13	22.5	10	30/27
PG19	PG19	12~15	24	10	30/28
PG21	PG21	13~18	28.3	12	35/33
PG25	PG25	16~21	30	12	37/35
PG29	PG29	18~25	37	12	45/42
PG36	PG36	22~32	47	15	58/52
PG42	PG42	32~38	54	18	62/58
PG48	PG48	37~44	59.3	18	70/64
PG63	PG63	42~50	71	30	83/77

Electrical Accessories

Tie Series Cable Ties




Self-locking Nylon Cable Ties

Material: Nylon 66, 94V-2 certified by UL. Heat resisting, erosion control, insulate well and not apt to age.

Color: Natural (or white, standard color), black and other colors are available as requested.

Type	L		W (mm)	Max. Bundle Dia.(mm)	Min tensile strength		Packing
	Inch	mm			lbs	Kgs	
3×60	2 3/8"	60	2.5	11	18	8	100PCS & 1000PCS
3×80	3 3/16"	80	2.5	16	18	8	
3×100	4"	100	2.5	23	18	8	
3×120	4 3/4"	120	2.5	27	18	8	
3×150	6"	150	2.5	36	18	8	
3×160	6 1/4"	160	2.5	39	18	8	100PCS & 500PCS
3×200	8"	200	2.5	50	18	8	
4×100	4"	100	3.6	21	40	18	
4×120	4 3/4"	120	3.6	27	40	18	
4×150	6"	150	3.6	38	40	18	
4×180	7"	180	3.6	46	40	18	100PCS & 250PCS
4×200	8"	200	3.6	52	40	18	
4×250	10"	250	3.6	65	40	18	
4×300	11 5/8"	300	3.6	80	40	18	
4×370	14 1/2"	370	3.6	100	40	18	
5×100	4"	100	4.8	23	50	22	100PCS & 250PCS
5×120	4 3/4"	120	4.8	27	50	22	
5×160	6 1/4"	160	4.8	38	50	22	
5×185	7"	185	4.8	42	50	22	
5×200	8"	200	4.8	50	50	22	
5×250	10"	250	4.8	65	50	22	100PCS & 250PCS
5×280	11"	280	4.8	70	50	20	
5×300	11 5/8"	300	4.8	82	50	22	
5×350	13 3/4"	350	4.8	98	50	22	
5×370	15"	370	4.8	105	50	22	
5×400	15 3/4"	400	4.8	115	50	22	100PCS & 250PCS
5×430	17"	430	4.8	125	50	22	
5×450	17 3/4"	450	4.8	132	50	22	
5×500	19 11/16"	500	4.8	148	50	22	
5×530	20"	530	4.8	155	50	22	
8×150	6"	150	7.6	35	119	53	100PCS & 250PCS
8×200	8"	200	7.6	50	119	53	
8×250	10"	250	7.6	66	119	53	
8×300	11 5/8"	300	7.6	82	119	53	
8×350	13 3/4"	350	7.6	98	119	53	
8×370	14 1/4"	370	7.6	105	119	53	100PCS
8×400	15 3/4"	400	7.6	114	119	53	
8×450	17 3/4"	450	7.6	130	119	53	
8×500	19 11/16"	500	7.6	146	119	53	
8×550	21 1/16"	550	7.6	160	119	53	
10×400	15 3/4"	400	8.8	114	180	80	100PCS
10×450	17 3/4"	450	8.8	126	180	80	
10×500	19 11/16"	500	8.8	140	180	80	
10×550	21 1/16"	550	8.8	160	180	80	
10×610	23 5/8"	610	8.8	178	180	80	
10×650	25 9/16"	650	8.8	190	180	80	100PCS
10×760	30"	760	8.8	226	180	80	
10×810	32"	810	8.8	241	180	80	
10×920	36 1/4"	920	8.8	276	180	80	
10×1020	40 1/6"	1020	8.8	295	180	80	
10×1200	48"	1200	8.8	345	180	80	100PCS
12×650	25 9/16"	650	11	190	250	114	
12×760	29 9/16"	760	11	226	250	114	

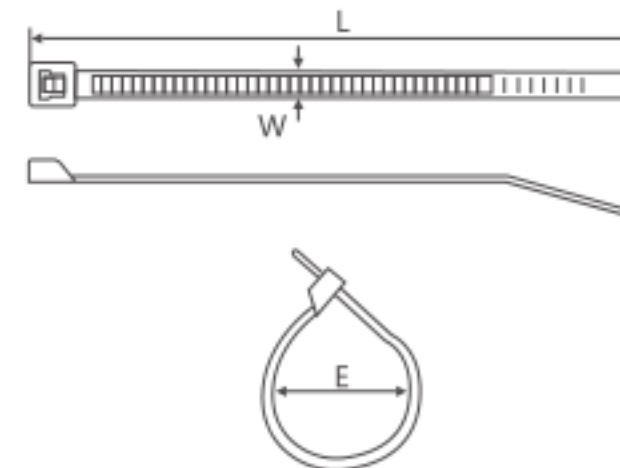

Tie Series




Terminal Blocks

Terminal blocks H U(W) V(F) type.

Material: Made of PA PE or PP.

Type	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	mm ²	Volt	Amp	Packing
3A	93	16	12	6	8	4	400V	3A	10PCS
6A	115	15.7	13	6.5	9.5	6	400V	6A	
10A	126	20.2	15.5	8.4	10.5	10	400V	10A	
16A	139	23	17.7	10.3	12	12	400V	16A	
20A	155	25	19.2	11.5	13.5	14	400V	20A	
30A	171	26	20.5	12	14.5	16	400V	30A	
60A	192	30	26	13.5	16.5	25	400V	60A	
80A	205	33	27	15	17	35	400V	80A	
100A	250	46	31	22	21	40	400V	100A	


Tie Series

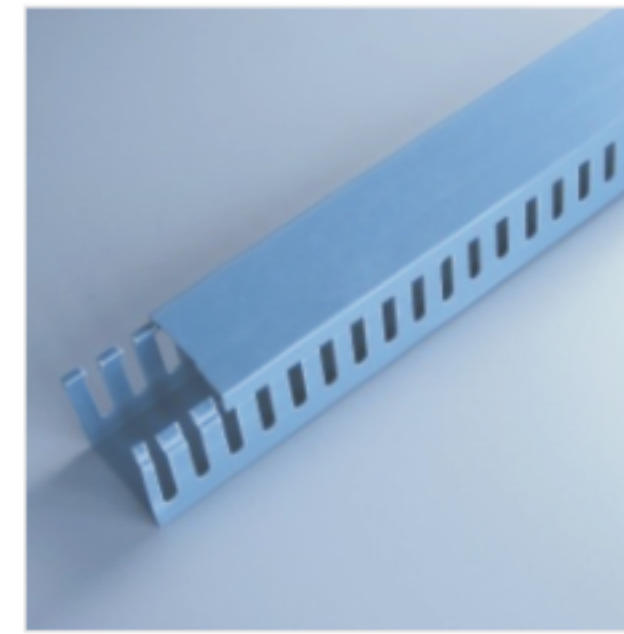

Insulating Distributing Slot

Material: Made from PVC (grey), good insulation and heat-resisting up to 85.

Structure: Made up of duct bottom and lid, with two out-holes designed at the bottom.

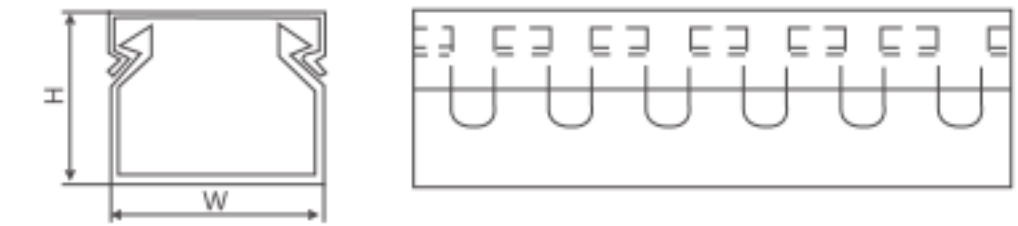

Type	H×W (mm)	Contained wire (2.0')	Length
2015	20×15	5-10 PCS	2m
2525	25×25	10-20 PCS	2m
3015	30×15	5-15 PCS	2m
3020	30×20	10-20 PCS	2m
3025	30×25	15-25 PCS	2m
3030	30×30	20-40 PCS	2m
3035	30×35	30-45 PCS	2m
3535	35×35	35-50 PCS	2m
4025	40×25	20-25 PCS	2m
4030	40×30	35-45 PCS	2m
4040	40×40	60-70 PCS	2m
5025	50×25	25-45 PCS	2m
5030	50×30	30-50 PCS	2m
5035	50×35	50-60 PCS	2m
5040	50×40	60-70 PCS	2m
5045	50×45	70-80 PCS	2m
5050	50×50	80-90 PCS	2m
5055	50×55	100-110 PCS	2m
5080	50×80	180-200 PCS	2m
50100	50×100	210-260 PCS	2m
8045	80×45	160-180 PCS	2m
8050	80×50	180-200 PCS	2m
8055	80×55	180-210 PCS	2m
8080	80×80	240-290 PCS	2m
80100	80×100	260-350 PCS	2m
100100	100×100	300-400 PCS	2m

Flame-retardant Thermal Shrinkable Bushing



Characteristics

Flame-retardant thermal shrinkable bushing boasts good flame retardation, insulation, softness, low temperature and fast shrinking. It is widely used in wire connection, welding protection, wire marking, the insulation protection of resistance and capacitor, the corrosion protection of metal bar or tubes, and the antenna protection.

Principle of thermal shrinkage: under the high energy radiation, the linear polymer can form network cross-linked structure. The mechanical strength, temperature, chemical solution and ageing resistance of cross-linked polymer are greatly improved, especially the acid and alkali resistance.


Safety Standard: UL224 VW-1 C-UL CSA C22-2 OFT.

Color: Black, red, blue, white, yellow, green and transparent. And other colors are subject to the clients' needs.

Shrinking ratio: 2:1. Rated voltage: 600V.

Specification	Dimension before shrinking (mm)		Dimension after shrinking (mm)		Standard packaging (m/disc)	Application (mm)
	Internal diameter	Wall thickness	Internal diameter	Wall thickness		
Φ0.8	1.0±0.2	0.2±0.05	0.4±0.1	0.22±0.05	200	0.6~0.8
Φ1.0	1.4±0.3	0.2±0.05	0.4±0.1	0.28±0.05	200	0.75~0.9
Φ1.5	1.9±0.3	0.2±0.05	0.6±0.1	0.32±0.05	200	0.95~1.4
Φ2.0	2.4±0.3	0.25±0.05	0.9±0.1	0.35±0.05	200	1.1~1.8
Φ2.5	2.9±0.3	0.25±0.05	1.1±0.1	0.38±0.05	200	1.35~2.3
Φ3.0	3.4±0.4	0.25±0.05	1.4±0.1	0.40±0.05	200	1.6~2.7
Φ3.5	3.9±0.4	0.25±0.05	1.6±0.1	0.42±0.05	200	1.85~3.2
Φ4.0	4.5±0.4	0.25±0.05	1.8±0.1	0.45±0.05	200	2.1~3.6
Φ4.5	4.8±0.4	0.25±0.15	1.9±0.1	0.50±0.15	100	2.35~4.0
Φ5.0	5.4±0.4	0.25±0.15	2.3±0.1	0.55±0.15	100	2.6~4.5
Φ6.0	6.4±0.4	0.28±0.15	2.8±0.2	0.55±0.15	100	3.1~5.4
Φ7.0	7.4±0.4	0.28±0.15	3.3±0.2	0.55±0.15	100	3.7~3
Φ8.0	8.4±0.5	0.28±0.15	3.8±0.2	0.55±0.15	100	4.2~7.2
Φ9.0	9.4±0.5	0.30±0.15	4.3±0.2	0.55±0.15	100	4.7~8.0
Φ10	10.5±0.5	0.30±0.15	4.8±0.2	0.55±0.15	100	5.2~9.0
Φ11	11.5±0.5	0.30±0.15	5.3±0.2	0.60±0.15	100	5.7~10
Φ12	12.5±0.5	0.30±0.15	5.7±0.3	0.60±0.15	100	6.2~11
Φ13	13.5±0.5	0.33±0.15	6.2±0.3	0.60±0.15	100	6.7~2
Φ14	14.5±0.5	0.35±0.15	6.7±0.3	0.60±0.15	100	7.3~13
Φ15	15.5±0.6	0.38±0.15	7.2±0.3	0.65±0.15	100	7.8~14
Φ16	16.5±0.6	0.38±0.15	7.7±0.3	0.65±0.15	100	8.3~15
Φ17	17.5±0.6	0.38±0.15	8.2±0.3	0.65±0.15	100	8.8~16
Φ18	19.0±0.6	0.40±0.15	8.7±0.3	0.65±0.15	100	9.3~17
Φ20	21.0±0.8	0.40±0.20	9.7±0.3	0.75±0.20	100	10.4~19
Φ22	22.8±0.8	0.42±0.20	10.0±0.1	0.75±0.20	100	11.4~21
Φ25	25.8±0.8	0.45±0.20	11.0±0.1	0.75±0.20	50	12.8~24
Φ28	28.8±0.8	0.45±0.20	13.0±0.1	0.75±0.20	50	14.4~29
Φ30	30.8±0.8	0.45±0.20	14.0±0.1	0.75±0.20	50	16~29
Φ35	35.8±0.8	0.50±0.20	16.0±0.1	0.85±0.20	50	18~34
Φ40	42.0±1.0	0.50±0.20	19.0±0.1	0.85±0.20	50	21~39
Φ50	51.0±1.0	0.50±0.20	24.0±0.1	0.85±0.20	50	26~49
Φ60	61.0±1.0	0.65±0.20	29.0±0.1	0.85±0.20	25	35~55
Φ70	71.0±1.0	0.65±0.20	33.0±2.0	1.00±0.20	25	40~65
Φ80	81.0±1.0	0.65±0.20	37.0±2.0	1.00±0.20	25	45~75
Φ90	91.0±1.0	0.65±0.20	43.0±2.0	1.00±0.20	25	50~88
Φ100	102.0±2.0	0.65±0.20	48.0±2.0	1.00±0.20	25	55~95
Φ120	122.0±2.0	0.80±0.20	58.0±2.0	1.50±0.20	15	65~115
Φ150	152.0±2.0	0.80±0.20	73.0±2.0	1.50±0.20	15	80~145
Φ180	182.0±2.0	0.80±0.20	88.0±2.0	1.50±0.20	15	95~175

Double-wall Thermal Shrinkable Bushing

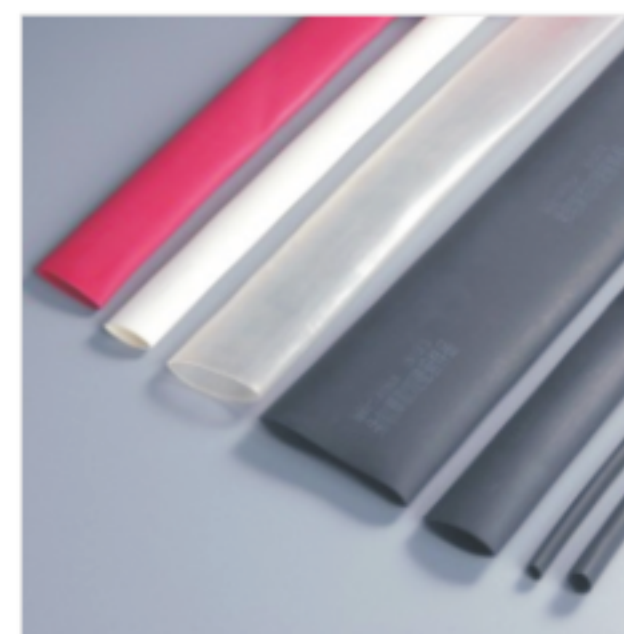

Features and Application

1. This series is a semi-conducting thermal shrinkable bushing coated with a layer of thermosol inside. Its external layer consists of radiation cross-linked polythene, and its internal layer is the specially designed adhesive internal wall. When it is heated, the internal thermosol will shrink to the external wall and fill the clearance. When it is cooled, the thickness of double walls is very even and solid. It is widely used for the water-tightness and air-tightness of wiring for electronic equipments, the sealing of wiring branch, rust protection of metal wires, and the remedy of wires and cables. It can prevent the polymer chains from loosening and falling, such as pool lamp, auto pipeline, and advanced lines.

2. Features:

Application: -55°C~125°C;

Initial shrinking temperature: 70°C;

Full shrinking temperature: 125°C;

Melting temperature of internal adhesive layer: 70°C~80°C


Shrinking ratio: 3:1

Seal, water-proof, strong flexibility, convenient use, able to shrink when heated with oven or hot air gun; timely supply and delivery; and large production.

Color standard: Black (Other colors are upon the clients' needs).


Specification		Dimension before shrinking internal diameter	Dimension after shrinking (mm)			Standard packaging (m/disc)	Application (mm)
mm	Inch		Wall thickness	Wall thickness	Internal diameter		
Φ2.4	3/32	2.7±0.3	0.7±0.15	0.30±0.10	0.80	200	0.9~2.2
Φ3.2	1/8	3.5±0.3	0.90±0.15	0.35±0.10	1.00	200	1.2~3.1
Φ4.8	3/16	5.1±0.3	1.0±0.15	0.40±0.10	1.60	100	1.8~4.6
Φ6.4	1/4	6.8±0.4	1.2±0.15	0.45±0.12	2.20	100	2.4~6.4
Φ7.9	5/16	8.3±0.4	1.2±0.15	0.50±0.12	2.70	100	2.9~7.7
Φ9.5	3/8	9.9±0.4	1.4±0.15	0.50±0.12	3.20	1.22	3.4~9.4
Φ12.7	1/2	13.2±0.5	1.6±0.20	0.50±0.12	4.20	1.22	4.4~12.5
Φ15.0	5/8	15.5±0.5	1.8±0.20	0.55±0.12	5.20	1.22	5.4~14.8
Φ19.1	3/4	19.6±0.5	2.0±0.20	0.55±0.12	6.30	1.22	6.5~18.8
Φ25.4	1	26.2±0.8	2.1±0.20	0.55±0.15	8.50	1.22	8.8~25
Φ30.0	5/4	30.5±0.8	2.2±0.20	0.60±0.15	10.2	1.22	10.5~30
Φ39.0	3/2	39.8±0.8	2.4±0.20	0.60±0.15	13.5	1.22	14.0~39
Φ50.0	2	50.0±0.8	2.7±0.25	0.70±0.15	17.0	1.22	17.5~49
Φ64	5/2	≥64	3.0±0.25	0.70±0.15	21.0	1.22	22~62
Φ75	3	≥76	3.0±0.30	1.00±0.20	25.0	1.22	26~72
Φ90	7/2	≥90	3.0±0.30	1.00±0.20	30.0	1.22	32~88
Φ100	4	≥100	3.0±0.30	1.00±0.20	34.0	1.22	36~90
Φ120	5	≥125	3.0±0.30	1.00±0.20	42.0	1.22	44~125

Yellow & Green Thermal Shrinkable Bushing

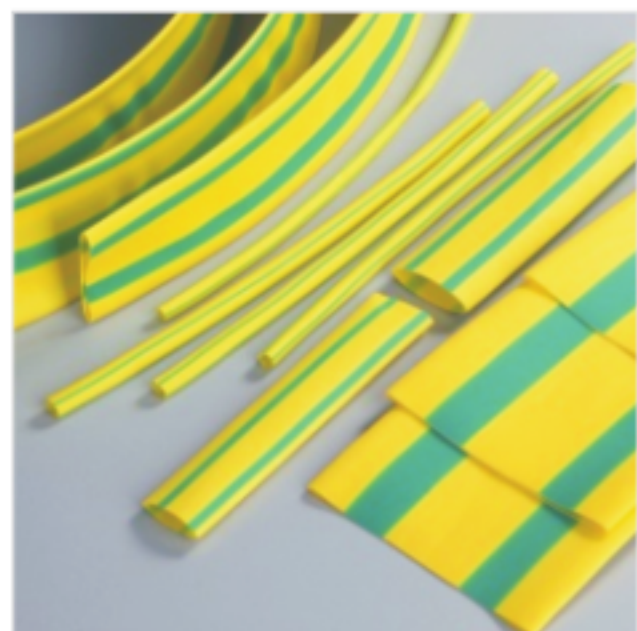

Features and Application

1. Yellow & green shrinkable bushing is processed and manufactured with excellent green and yellow polyolefin materials. When the products are shaped, they are cross linked and expanded continuously with electronic accelerator. The products are characterized by softness, flame retardation, fast shrinkage, bright and durable color, and stable performance. They are widely used in the marking of electric wires, earthing of cables, special lines and pipelines.
2. Features: Application: -55°C~125°C; Initial shrinking temperature: 70°C; Full shrinking temperature: 125°C. Softness, flame retardation, bright and durable color, timely delivery and large supply, convenient use, able to shrink when heated with oven or hot air gun. Standard Color: yellow-green.

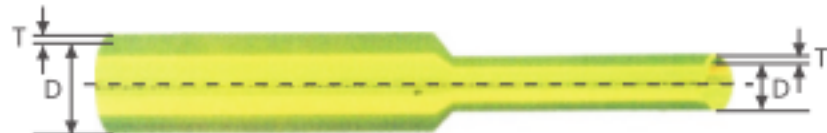

Test item	Index	Test item	Index
Continuous use temperature	-55°C-125°C	Flame retardation	PASS
Tensile strength	≥10.4Mpa	Breakdown strength	≥15kV/mm
Longitudinal shrinking ratio	≤8%	Volume resistivity	> 10 ¹⁴ Ω.cm

Specification	Dimension before shrinking (mm)		Dimension after shrinking (mm)		Standard packaging (m/disc)	Application (mm)
	Internal diameter	Wall thickness	Max Internal diameter	Wall thickness		
Φ2.0	2.4±0.3	0.25±0.05	0.9±0.1	0.35±0.05	200	1.1~1.8
Φ3.0	3.4±0.4	0.25±0.05	1.4±0.1	0.40±0.05	200	1.6~2.7
Φ4.0	4.5±0.4	0.25±0.05	1.8±0.1	0.45±0.05	200	2.1~3.6
Φ5.0	5.4±0.4	0.25±0.15	2.3±0.1	0.55±0.15	100	2.6~4.5
Φ6.0	6.4±0.4	0.28±0.15	2.8±0.2	0.55±0.15	100	3.1~5.4
Φ7.0	7.4±0.4	0.28±0.15	3.3±0.2	0.55±0.15	100	3.7~6.3
Φ8.0	8.4±0.5	0.28±0.15	3.8±0.2	0.55±0.15	100	4.2~7.2
Φ10	10.5±0.5	0.30±0.15	4.8±0.2	0.55±0.15	100	5.2~9.0
Φ12	12.5±0.5	0.30±0.15	5.7±0.3	0.60±0.15	100	6.2~11
Φ14	14.5±0.5	0.35±0.15	6.7±0.3	0.60±0.15	100	7.3~13
Φ16	16.5±0.6	0.38±0.15	7.7±0.3	0.65±0.15	100	8.3~15
Φ0	21.0±0.8	0.40±0.15	9.7±0.3	0.75±0.15	100	10.4~19
Φ25	25.8±0.8	0.45±0.15	11.0±1.0	0.75±0.15	50	12.8~24
Φ30	30.8±0.8	0.45±0.15	14.0±1.0	0.75±0.15	50	16~29
Φ35	35.8±0.8	0.50±0.20	16.0±1.0	0.85±0.20	50	18~34
Φ40	42.0±1.0	0.50±0.20	19.0±1.0	0.85±0.20	50	21~39
Φ50	51.0±1.0	0.50±0.20	24.0±1.0	0.85±0.20	50	26~49
Φ60	61.0±1.0	0.65±0.20	29.0±1.0	0.85±0.20	25	35~55
Φ70	71.0±1.0	0.65±0.20	33.0±2.0	1.00±0.20	25	40~65
Φ80	81.0±1.0	0.65±0.20	37.0±2.0	1.00±0.20	25	45~75
Φ90	91.0±1.0	0.65±0.20	43.0±2.0	1.00±0.20	25	50~88
Φ100	102.0±2.0	0.65±0.20	48.0±2.0	1.00±0.20	25	55~95
Φ120	122.0±2.0	0.80±0.20	58.0±2.0	1.50±0.20	15	65~115
Φ150	152.0±2.0	0.80±0.20	73.0±2.0	1.50±0.20	15	80~145
Φ180	182.0±2.0	0.80±0.20	88.0±2.0	1.50±0.20	15	95~175

Tie Series




Spiral Wrapping Band

Material:
Made of PE.

How to see:
Fix one end with safety belt first, then circle the wires clockwise to make them tighten.

Usage:
A protection wear for electric wires, and make them insulation and lock nice.

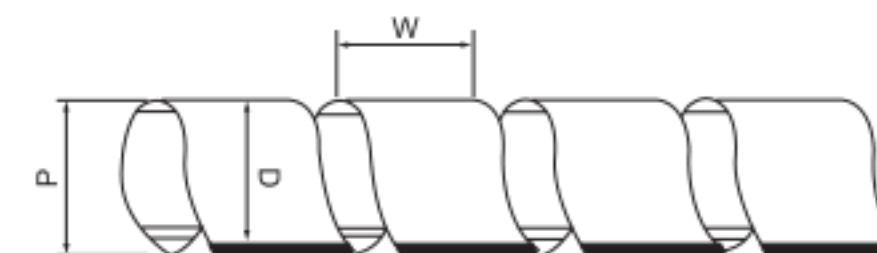

Type	D (mm)	D1 (mm)	W (mm)	Wrapping range (mmΦ)	Packing
HD-6	4	6	7.0	4×50	10m
HD-8	6	8	10.8	6×60	
HD-10	7.5	10	11.4	7.5×60	
HD-12	9	12	13.9	9×65	
HD-16	13	16	15.0	12×70	
HD-20	16	20	18.2	15×100	
HD-25	21	25	19.6	20×130	



Cable Marker

Material:
Made of PVC, oil and erosion control, heat resisting up to 85°C.

How to see:
The inside is hollow, but elastic, the diameter can change with the needed wire.



Type	Approx wire		markers	Packing
	sq	mm		
EC-0	0.75~1.5	0.75~3.0	0~9 A~Z + - * / \	1000PCS
EC-1	2.5	2.6~4.2		1000PCS
EC-2	4	3.6~7.4		500PCS
EC-3	6	5.2~10		350PCS
	8	6.8		250PCS
	10	7.5		180PCS
EC-J	2~8	3.5~7		500PCS

Tie Series




Tie Mounts

Material:
UL approved nylon 66, 94V-2, with imported adhesive sticker. Good insulation, long lasting and uneasy to age.

How to use:
Remove the cover of the adhesive and stick the piece properly, then put in cable tie for using.



Usage:
Used where hole-drilling is not allowed. Easy and time-saving.

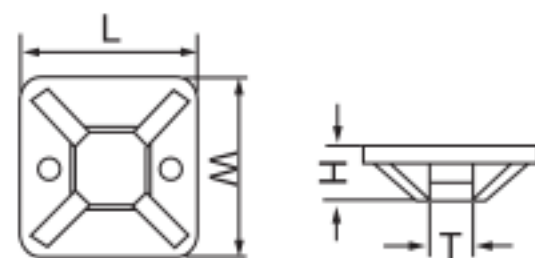

Type	LxW(mm)	H(mm)	T(mm)	Packing
HDS-20	20x20	6.1	5	100PCS & 1000PCS
HDS-20	20x20	7.5	6.2	100PCS & 500PCS
HDS-30	30x30	8.7	6.4	100PCS & 500PCS
HDS-40	40x40	6.4	10.8	100PCS & 250PCS

Terminal Block Series



HC-001

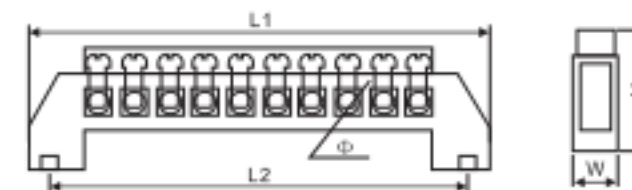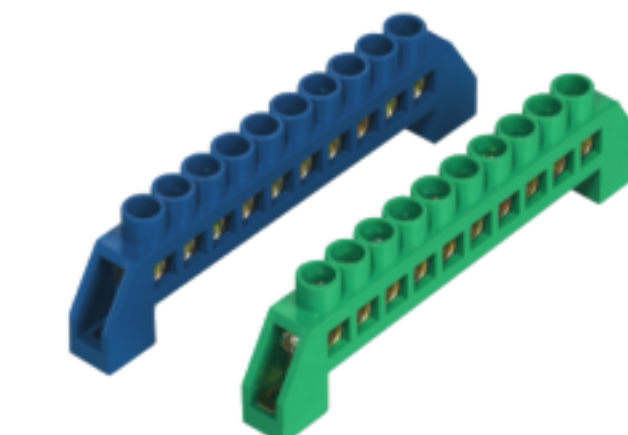

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 100°C.
Brass. Screw is iron plated zinc. Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
4	6x9	36	59.5	48.5	29	11	6	M4x7	PA, ABS
6	6x9	53	76.5	65.5	29	11	6	M4x7	PA, ABS
8	6x9	70	93.5	82.5	29	11	6	M4x7	PA, ABS
10	6x9	87	110.5	99.5	29	11	6	M4x7	PA, ABS
12	6x9	105	127.5	116.5	29	11	6	M4x7	PA, ABS
4	8x12	44	59.5	48.5	32	12.5	7	M5x10	PA, ABS
6	8x12	54	76.5	65.5	32	12.5	7	M5x10	PA, ABS
8	8x12	71	93.5	82.5	32	12.5	7	M5x10	PA, ABS
10	8x12	87	110.5	99.5	32	12.5	7	M5x10	PA, ABS
12	8x12	105	127.5	116.5	32	12.5	7	M5x10	PA, ABS

HC-002

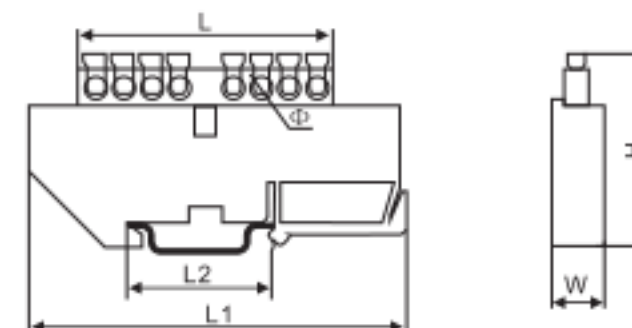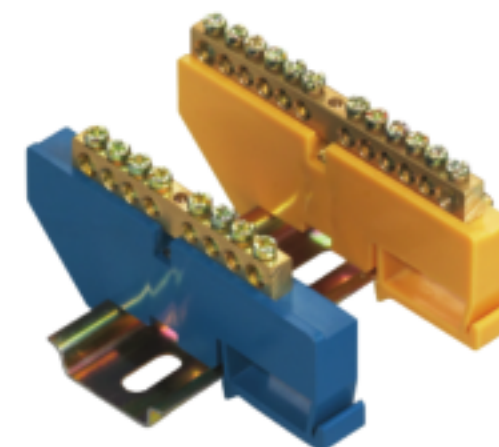


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 100°C.
Brass. Screw is iron plated zinc. Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
8	6x9	60	90	35	43	12	5.2	M4x7	PA, ABS
10	6x9	73	90	35	43	12	5.2	M4x7	PA, ABS
12	6x9	86	90	35	43	12	5.2	M4x7	PA, ABS
14	6x9	99	90	35	43	12	5.2	M4x7	PA, ABS
8	8x12	71	90	35	46	12	6.5	M5x10	ABS, PE
10	8x12	87	90	35	46	12	6.5	M5x10	ABS, PE
12	8x12	103	103	35	46	12	6.5	M5x10	ABS, PE
14	8x12	119	119	35	46	12	6.5	M5x10	ABS, PE


Electrical Accessories
Terminal Block Series

HC-003

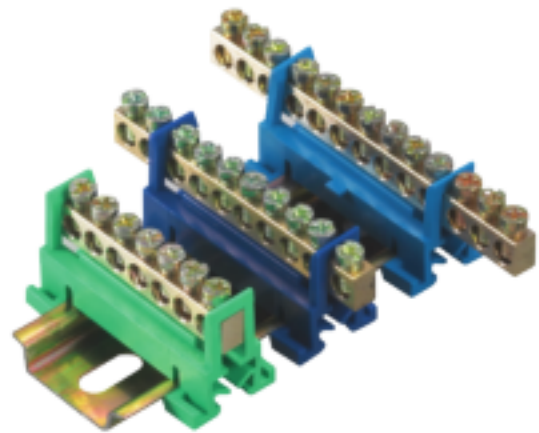


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 100°C.
Brass. Screw is iron plated zinc. Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6x9	51	51	35	28	22	5.3	M5x8	PA
8	6x9	59	59	35	28	22	5.3	M5x8	PA
10	6x9	72	72	35	28	22	5.3	M5x8	PA
12	6x9	85	85	35	28	22	5.3	M5x8	PA

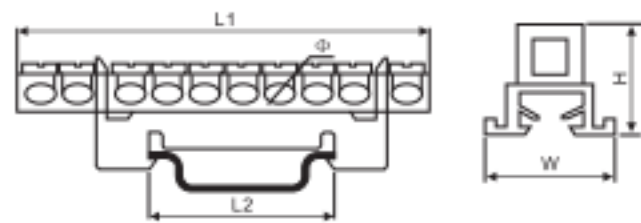


HC-004

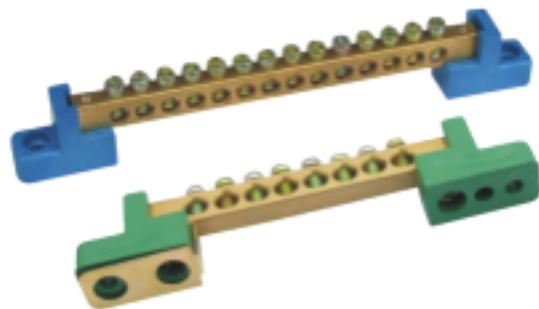


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
6	6x9	53.5	85	72.5	22	12.5	5	M4x7	ABS, PE
7	6x9	60	91.5	79	22	12.5	5	M4x7	ABS, PE
8	6x9	66.5	98	85.5	22	12.5	5	M4x7	ABS, PE
10	6x9	79.5	111	98.5	22	12.5	5	M4x7	ABS, PE
12	6x9	92.5	124	111.5	22	12.5	5	M4x7	ABS, PE
6	8x12	66.5	95.5	82.5	26	12.5	6.5	M5x10	ABS, PE
7	8x12	74.5	103.5	90.5	26	12.5	6.5	M5x10	ABS, PE
8	8x12	82.5	111.5	98.5	26	12.5	6.5	M5x10	ABS, PE
10	8x12	98.5	127.5	114.5	26	12.5	6.5	M5x10	ABS, PE
12	8x12	114.5	143.5	130.5	26	12.5	6.5	M5x10	ABS, PE

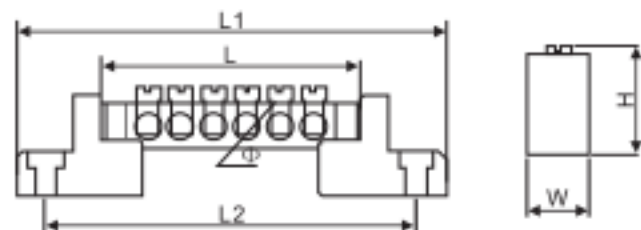


Electrical Accessories
Terminal Block Series

HC-005

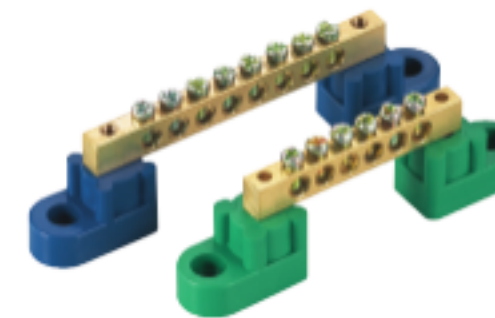


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
8	6x9	60	90	35	43	12	5.2	M4x7	PA, ABS
10	6x9	73	90	35	43	12	5.2	M4x7	PA, ABS
12	6x9	86	90	35	43	12	5.2	M4x7	PA, ABS
14	6x9	99	90	35	43	12	5.2	M4x7	PA, ABS
8	8x12	71	90	35	46	12	6.5	M5x10	ABS, PE
10	8x12	87	90	35	46	12	6.5	M5x10	ABS, PE
12	8x12	103	103	35	46	12	6.5	M5x10	ABS, PE
14	8x12	119	119	35	46	12	6.5	M5x10	ABS, PE

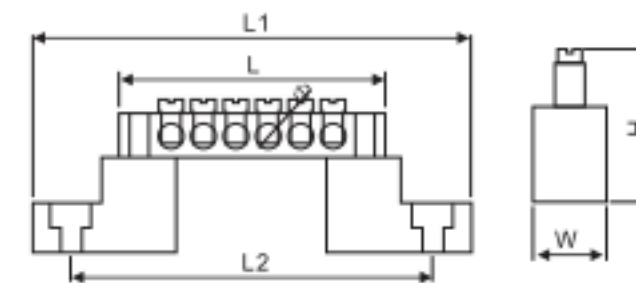


HC-006

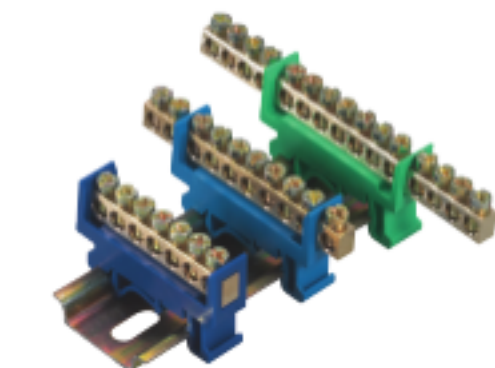

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
Brass. Screw is iron plated zinc.
Voltage: 250-450V.
Color: according to sample picture or customized.


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6x9	51	51	35	32	12	5.3	M5x8	PA
10	6x9	72	72	35	32	12	5.3	M5x8	PA
12	6x9	85	85	35	32	12	5.3	M5x8	PA
15	6x9	104.5	104.5	35	32	12	5.3	M5x8	PA

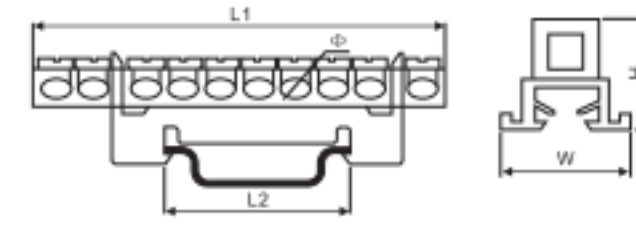

Electrical Accessories


Terminal Block Series

HC-007

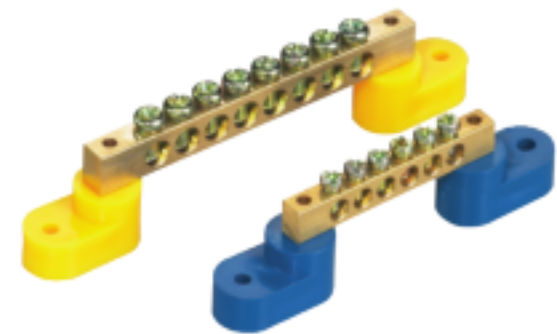


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
6	6x9	53.5	88.5	76.5	27.5	15	5	M4x7	ABS, PE
7	6x9	60	95	83	27.5	15	5	M4x7	ABS, PE
8	6x9	66.5	101.5	89.5	27.5	15	5	M4x7	ABS, PE
10	6x9	79.5	114.5	102.5	27.5	15	5	M4x7	ABS, PE
12	6x9	92.5	127.5	115.5	27.5	15	5	M4x7	ABS, PE
6	8x12	66.5	99.5	87.5	31	15	6.5	M5x10	ABS, PE
7	8x12	74.5	107.5	95.5	31	15	6.5	M5x10	ABS, PE
8	8x12	82.5	115.5	103.5	31	15	6.5	M5x10	ABS, PE
10	8x12	98.5	131.5	119.5	31	15	6.5	M5x10	ABS, PE
12	8x12	114.5	147.5	135.5	31	15	6.5	M5x10	ABS, PE

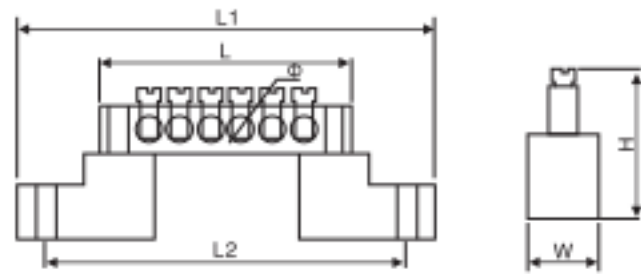


HC-008

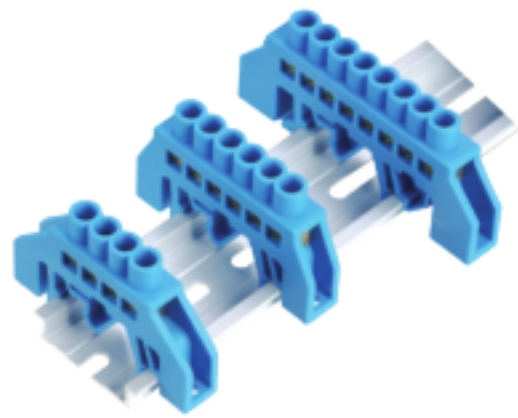

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
4	6x9	27	57	48	35	11	5	M4x7	PA
6	6x9	40	57	48	35	11	5	M4x7	PA
8	6x9	53	78	66	35	11	5	M4x7	PA
10	6x9	66	89	77	35	11	5	M4x7	PA
12	6x9	79	102	90	35	11	5	M4x7	PA

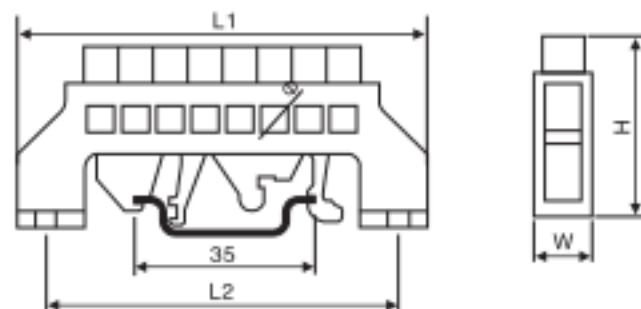

Electrical Accessories


Terminal Block Series

HC-009

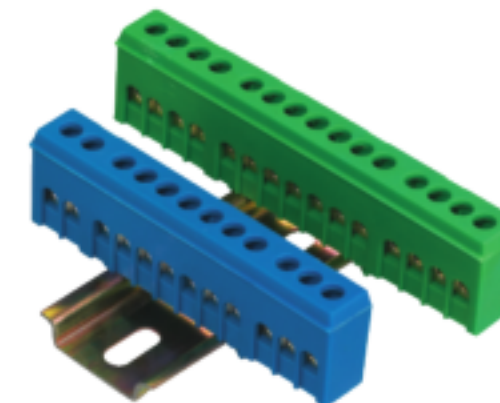


PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6x9	51	55	35	32	14	5.3	M5x8	PA
10	6x9	72	76	35	32	14	5.3	M5x8	PA
12	6x9	85	89	35	32	14	5.3	M5x8	PA
15	6x9	104.5	108.5	35	32	14	5.3	M5x8	PA

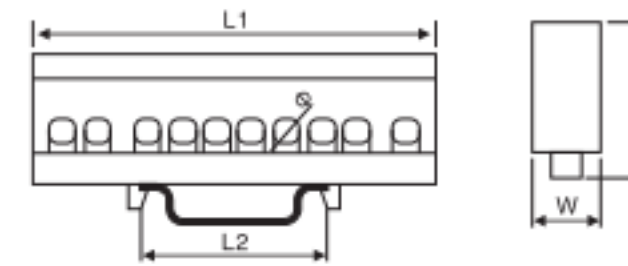


HC-010

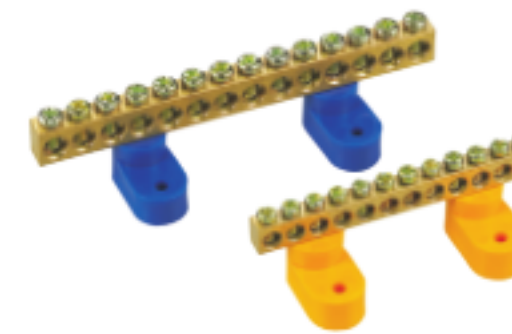

PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
 ABS, good resist dissolve, good bounce impact force. Working Temperature: -20°C to 70°C.
 PE, Polypropylene, Inflammation retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
 Brass. Screw is iron plated zinc.
 Voltage: 250-450V.
 Color: according to sample picture or customized.

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
6	6x9	42	42	19.5	28	30	5.3	M4x8	ABS, PE
8	6x9	55	55	19.5	28	30	5.3	M4x8	ABS, PE
10	6x9	68	68	32.5	28	30	5.3	M4x8	ABS, PE
12	6x9	71	71	32.5	28	30	5.3	M4x8	ABS, PE
14	6x9	84	84	32.5	28	30	5.3	M4x8	ABS, PE
6	8x12	46	46	22.5	32	30	6	M5x9	ABS, PE
8	8x12	61	61	22.5	32	30	6	M5x9	ABS, PE
10	8x12	76	76	37.5	32	30	6	M5x9	ABS, PE
12	8x12	91	91	37.5	32	30	6	M5x9	ABS, PE
14	8x12	106	106	37.5	32	30	6	M5x9	ABS, PE

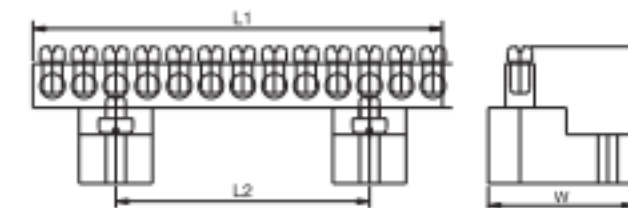


Electrical Accessories
Terminal Block Series

HC-0012



PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
ABS, good resist dissolve,good bounce impact fore.Working Temperature:-20°C to 70°C.
PE,Polypropylene,Inflaming retarding,low transparency, low rigidity,good bounce impact force. Working Temperature:-30°C to 110°C
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

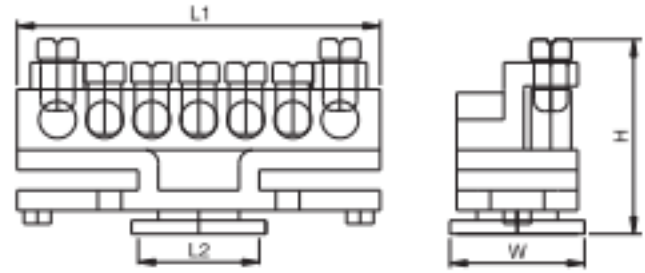


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
7	6×9	54	54	20	30	20	5.3	M5×8	

HC-013



PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
ABS, good resist dissolve,good bounce impact fore.Working Temperature:-20°C to 70°C.
PE,Polypropylene,Inflaming retarding,low transparency, low rigidity,good bounce impact force. Working Temperature:-30°C to 110°C
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

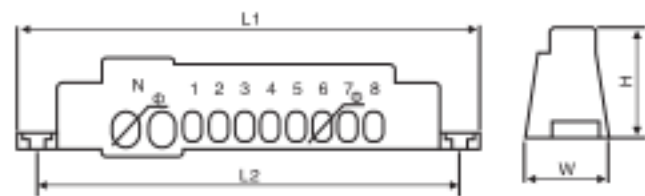


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
4	1.2		90	78	30	22	6(2×8)		PA
6	1.2		105	93	30	22	6(2×8)		PA
8	1.2		120	108	30	22	6(2×8)		PA
10	1.2		135	123	30	22	6(2×8)		PA
12	1.2		150	139	30	22	6(2×8)		PA

Electrical Accessories
Terminal Block Series

HC-014




PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
ABS, good resist dissolve,good bounce impact fore.Working Temperature:-20°C to 70°C.
PE,Polypropylene,Inflaming retarding,low transparency, low rigidity,good bounce impact force. Working Temperature:-30°C to 110°C
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

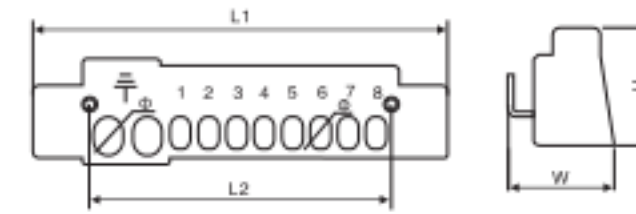

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
6	1.2		81	51	33	29	6(2×8)		PA
8	1.2		96	66	33	29	6(2×8)		PA
10	1.2		111	81	33	29	6(2×8)		PA
12	1.2		126	96	33	29	6(2×8)		PA
14	1.2		141	111	33	29	6(2×8)		PA

HC-016

PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

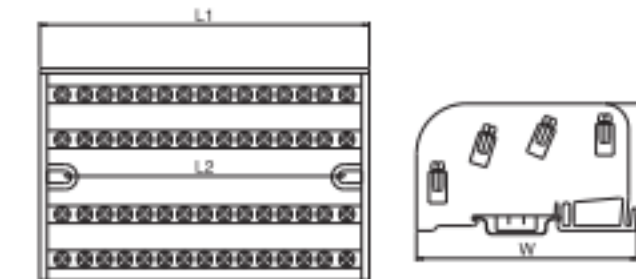

Item No.	Spec.	Rated current (A)	Rated voltage (V)	L1	L2	H	W	最大进线 Max. section	进线数量 Hole Qty	塑料材质 Plastic Setting
	Wxh			mm						
207	6.5×12	125A	500V	67	48	50	45	35mm ²	2×7	PA
211	6.5×12	125A	500V	100	86	50	45	35mm ²	2×11	PA
215	6.5×12	125A	500V	134	118	50	45	35mm ²	2×15	PA
407	6.5×12	125A	500V	67	48	50	90	35mm ²	4×7	PA
411	6.5×12	125A	500V	100	86	50	90	35mm ²	4×11	PA
415	6.5×12	125A	500V	134	118	50	90	35mm ²	4×15	PA
413	8×17	160A	500V	180	168	73	138	50mm ²	4×13	PA


Terminal Block Series

HC-017



PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

Item No.	Spec. Wxh	Rated current (A)	Rated voltage (V)	mm				最大进线 Max. section	进线数量 Hole.Qty	塑料,材质 Plastic Setting
				L1	L2	H	W			
420	4 x 15	200A	500V	280	128	115	190	75mm ²	4 x 11	PA
425	5 x 20	250A	500V	280	128	115	190	100mm ²	4 x 11	PA
440	6 x 25	400A	500V	280	128	115	190	185mm ²	4 x 10	PA

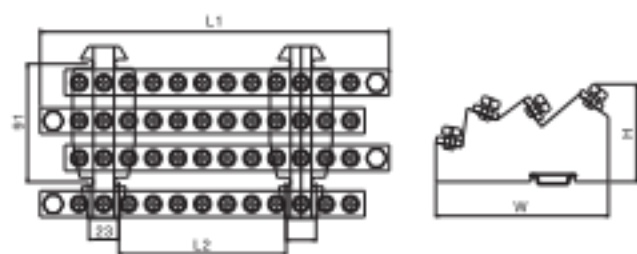


HC-018




PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

Way	Spec. Wxh	L	mm				Φ	Screw Size	Plastic Setting
			L1	L2	H	W			
4	1.2		90	78	30	22	6(2 x 8)	PA	
6	1.2		105	93	30	22	6(2 x 8)	PA	
8	1.2		120	108	30	22	6(2 x 8)	PA	
10	1.2		135	123	30	22	6(2 x 8)	PA	
12	1.2		150	139	30	22	6(2 x 8)	PA	

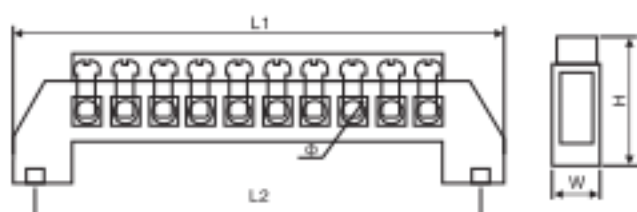


Terminal Block Series

HC-022

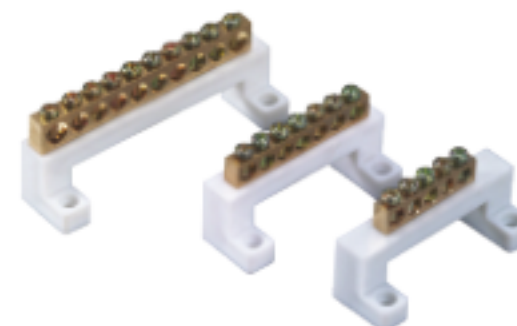

PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

Way	Spec. Wxh	L	mm				Φ	Screw Size	Plastic Setting
			L1	L2	H	W			
5	7 x 11	42.5	73	60	37	26	6.5(2 x 7)	M5 x 8	ABS、PE
7	7 x 11	58.5	73	60	37	26	6.5(2 x 7)	M5 x 8	ABS、PE
10	7 x 11	82.5	103	90	37	26	6.5(2 x 7)	M5 x 8	ABS、PE
5	8 x 13	52	73	60	40	26	7(2 x 9)	M5 x 10	ABS、PE
7	8 x 13	70	73	60	40	26	7(2 x 9)	M5 x 10	ABS、PE
10	8 x 13	97	103	90	40	26	7(2 x 9)	M5 x 10	ABS、PE

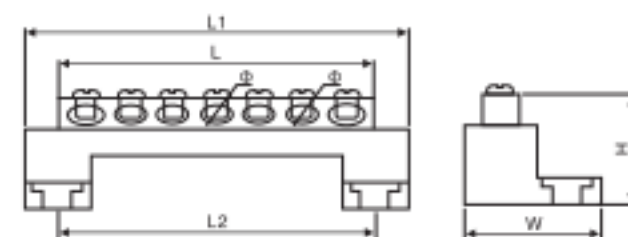


HC-023




PA,Polyamide 66,94-2 grade.Inflaming retarding,Working Temperature:-30°C to 110°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

Way	Spec. Wxh	L	mm				Φ	Screw Size	Plastic Setting
			L1	L2	H	W			
6	6 x 9	42	42	20	21	30	5.3	M4 x 8	ABS、PE
8	6 x 9	55	55	20	21	30	5.3	M4 x 8	ABS、PE
10	6 x 9	68	68	33	21	30	5.3	M4 x 8	ABS、PE
12	6 x 9	71	71	33	21	30	5.3	M4 x 8	ABS、PE
14	6 x 9	84	84	33	21	30	5.3	M4 x 8	ABS、PE

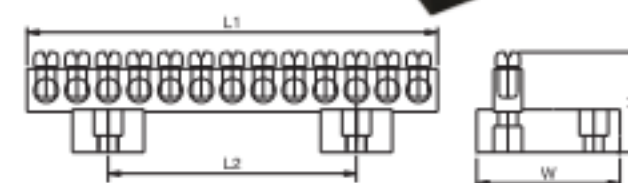


HC-026

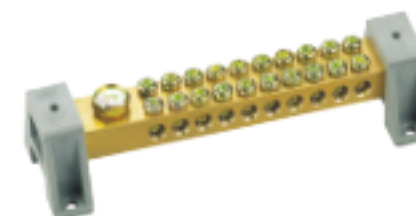

ABS,good resist dissolve,good bounce impact fore.Working Temperature:-20°C to 70°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

Way	Spec. Wxh	L	mm				Φ	Screw Size	Plastic Setting
			L1	L2	H	W			
1+4	9 x 18	64	82	68	29	42	5.3	M5 x 8	ABS、PE
1+6	9 x 18	80	98	84	29	42	5.3	M5 x 8	ABS、PE
1+8	9 x 18	96	114	100	29	42	5.3	M5 x 8	ABS、PE
1+4	12 x 18	64	82	68	29	42	5.3	M5 x 8	ABS、PE
1+6	12 x 18	80	98	84	29	42	5.3	M5 x 8	ABS、PE
1+8	12 x 18	96	114	100	29	42	5.3	M5 x 8	ABS、PE

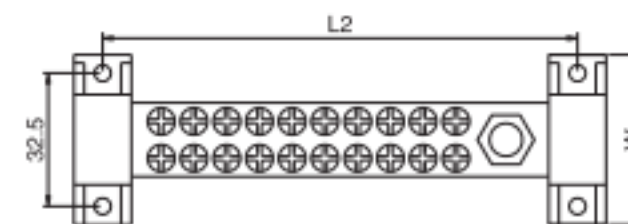


Terminal Block Series

HC-024



ABS,good resist dissolve,good bounce impact fore.Working Temperature:-20°C to 70°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

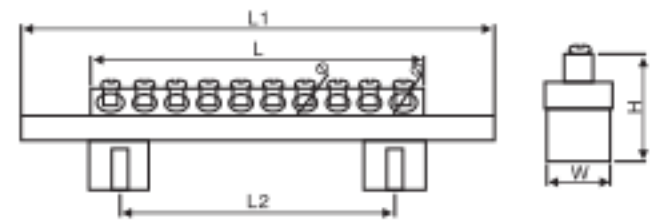


Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
5	7×11	42.5	120	70	35	16	6.5(2×7)	M5×8	ABS、PE
7	7×11	58.5	120	70	35	16	6.5(2×7)	M5×8	ABS、PE
10	7×11	82.5	120	70	35	16	6.5(2×7)	M5×8	ABS、PE

HC-025



ABS,good resist dissolve,good bounce impact fore.Working Temperature:-20°C to 70°C.
Brass.Screw is iron plated zinc.
Voltage:250-450V.
Color:according sample picture or customized.

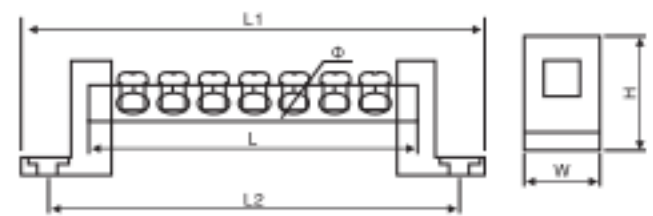

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
3	7×10	33	59.5	49.5	35	15	6.5	M5×9	ABS
4	7×10	41	67.5	57.5	35	15	6.5	M5×9	ABS
5	7×10	49	75.5	65.5	35	15	6.5	M5×9	ABS
6	7×10	57	83.5	73.5	35	15	6.5	M5×9	ABS
7	7×10	65	91.5	81.5	35	15	6.5	M5×9	ABS
8	7×10	73	99.5	89.5	35	15	6.5	M5×9	ABS
10	7×10	90	116.5	106.5	35	15	6.5	M5×9	ABS
12	7×10	106	132.5	122.5	35	15	6.5	M5×9	ABS
15	7×10	130	156.5	146.5	35	15	6.5	M5×9	ABS
3	9×15	46	68	58	35	15	9(2×10)	M5×12	ABS
5	9×15	68	90	80	35	15	9(2×10)	M5×12	ABS
7	9×15	90	112	102	35	15	9(2×10)	M5×12	ABS
8	9×15	101	123	113	35	15	9(2×10)	M5×12	ABS
10	9×15	123	145	135	35	15	9(2×10)	M5×12	ABS
12	9×15	145	167	157	35	15	9(2×10)	M5×12	ABS
15	9×15	178	200	190	35	15	9(2×10)	M5×12	ABS


UKK SERIES UNIPOLAR JUNCTION BOX

UKK

Summarize and trait

Material:made from PA Nylon.
Grade of flame retardant:UL94V0
Metal material:brass platedtim
The transparent cover good for see the cable is a reliable connection.

Item NO.	Current (Amp)	Voltage (V)	Conductors with starfix temules X-section(mm²)	Quantity of hole (pcs)	Dimensions(L×W×H) (mm)
UKK-80	80A	690A IEC	6 to 16 / 2.5 to 6 / 2.5 to 16	×1 / ×4 / ×2	31×70×45.5
UKK-125	125A	690A IEC	10 to 35 / 2.5 to 16	×1 / ×7	30×76.5×45.5
UKK-160	160A	690A IEC	10 to 70 / 2.5 to 16	×1 / ×7	30×76.5×45.5
UKK-250	250A	690A IEC	35 to 120 / 6 to 35 / 2.5 to 16 / 2.5 to 10	×1 / ×2 / ×5 / ×4	49×95×49
UKK-400	400A	690A IEC	95 to 185 / 6 to 35 / 2.5 to 16 / 2.5 to 10	×1 / ×2 / ×5 / ×4	49×95×49
UKK500	500A	690A IEC	4×15.5×0.8 to 8×24 / 6 to 35 / 2.5 to 16 / 2.5 to 10	×1 / ×2 / ×5 / ×4	49×95×49

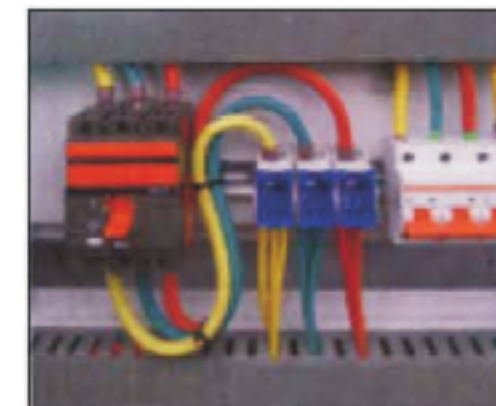

UKK-80



UKK-125



UKK-160



UKK-250



UKK-400



UKK-500